



OWNERS MANUAL



“Thank You!!”

FROM

THE SILVERTON TEAM

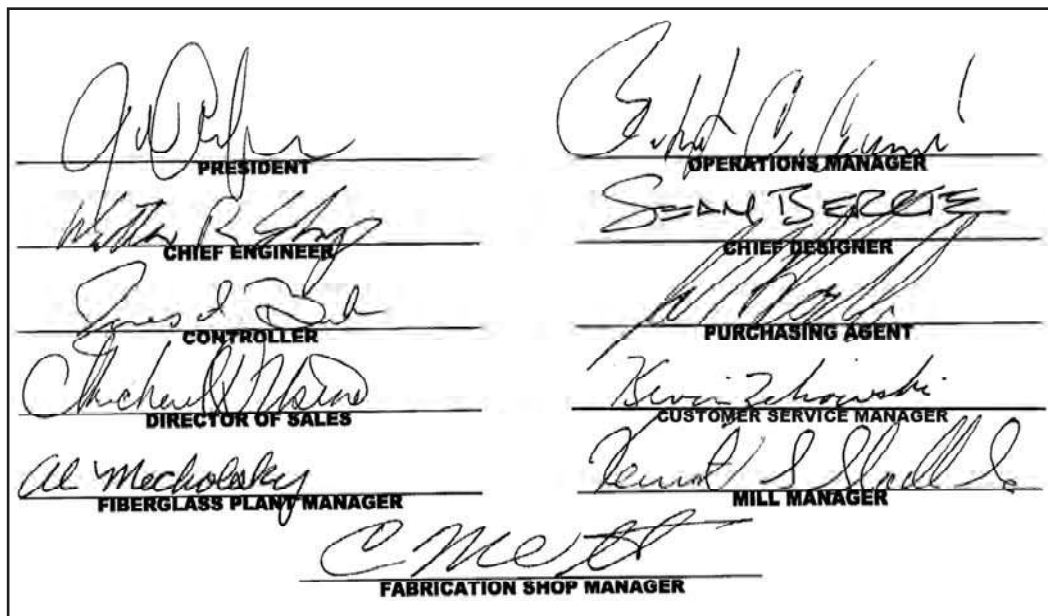


TABLE OF CONTENTS

Introduction.....	5	Cleaning and Maintenance	133
Letter from the President.....	5	Interior	133
The Silverton Story	7	Exterior	134
Introduction to your 43MY Owner's Manual	9	Canvas Enclosure (Optional).....	136
Warranty Information.....	13	Winterization and Storage	137
Recommended Reading.....	17	Operating your Yacht.....	143
Record Keeping.....	17	Engine Startup Preparation	143
Accident Reporting	18	Engine Startup.....	145
Getting Familiar	19	Shakedown Cruise	146
HULL	19	Getting Underway.....	147
Deck	23	Daily Engine Shutdown	147
Bridge	27	16 Ways to Reduce Fuel Costs	149
Interior	31	Glossary	151
Engine Compartment.....	37	Warning Labels.....	157
Boating Safety	39	Identification Labels.....	159
Boating Safety	39	Maintenance Log	161
Safety Equipment	39	Boat Record.....	163
Fire Equipment	40	Boating Accident Report.....	165
Navigation Rules of the Road.....	43	Float Plan	167
Basic Rules of Safe Boating	45		
Carbon Monoxide Safety	46		
Fuel Safety	51		
Emergency Situations.....	52		
Hazardous Weather Conditions.....	53		
FIRE Safety	54		
Systems Operation.....	57		
Air Conditioning/Heating System.....	57		
Anchor System	59		
Battery System	63		
Bilge Pump System	65		
Bilge Ventilation System.....	67		
Bonding System	69		
Carbon Monoxide (CO) Detector System.....	71		
Electrical System	73		
Entertainment System	85		
Fire Extinguisher System.....	87		
Fresh Water System.....	91		
Fuel System.....	95		
Generator System	105		
Hot Water System	107		
Propulsion System.....	109		
Marine Sanitation System.....	113		
Shower Sump Pump System.....	117		
Steering System	119		
Shift/Throttle Control System.....	121		
Trim Tab System	123		
Icemaker Unit (Optional).....	125		
LPG System (Optional).....	127		
Oil X-changer System (Optional).....	129		
Spotlight (Optional).....	131		
		SYSTEM SCHEMATICS	169
		Starboard Thru Hull	
		Port Thru Hull	
		Deck Layout	
		Interior Layout	
		Mechanical Layout	
		ELECTRICAL	
		Generator - 220 Volt, 50 Hz	
		Generator - 240 Volts, 60 Hz.	
		Engine Battery System	
		AC/DC Panel - Load 1 Details	
		AC/DC Panel Load 2 Details	
		AC/DC Panel - DC Feeds & Bilge Pumps	
		AC/DC Panel - AC Output	
		Glomex	
		Entertainment System - JVC Component Connections	
		Entertainment System - Flybridge Sound Package	
		Waste & Water Monitors	
		ELECTRICAL HARNESSSES	
		Salon	
		Forward Unit	
		Aft Unit	
		Bilge	
		Hard Top Liner	
		Bilge Jumper	
		Bridge Jumper	

SPECIFICATIONS

Overall Length - 44'-5"
Overall Length w/Ext. Platform - 47' - 4 3/4"
Length at Waterline - 35' - 10 7/8"
Length Fairbody - 42' - 0"
Beam - 14' - 10.5"
Beam - Waterline - 12' - 4"
Draft (Maximum) - 3' - 8 1/2"
Displacement (dry) - 30,306 lbs.
Displacement (full fluids) - 35,073 lbs.
Transom Deadrise - 17 degrees

Power Options

Crusader 8.2 & Merc 8.2L
Cummings 370B & 450C
Caterpillar 3126 (350HP, 385HP and 420HP)
VOLVO TAMD74

Fuel Capacity - 400 Gal.
Fresh Water Capacity - 150 Gal.
Waste Water Capacity - 80 Gal.
Water Heater Capacity - 10.5 Gal.
Average Headroom - 6' - 6"
Maximum Recommended Number of Persons - 14
Maximum Recommended Load - 2,692 lbs

INTRODUCTION

Thank You! From the President

Dear Silverton Owner,

Congratulations and welcome to the Silverton Family! As a Silverton owner, you will enjoy the quality and the attention to detail for which our Silverton yachts are renowned. Silverton and your dealer are committed to your service and total satisfaction.

This Owner's Manual will acquaint you with the proper operation and maintenance of your new Silverton yacht, as well as boating safety, which is our primary concern, whether docked or at sea.

Please mail in all manufacturers' registration and warranty cards to ensure that your Silverton and Original Equipment Manufacturer (O.E.M.) warranties are valid. The individual warranty cards are contained in the owner's packet along with all of the O.E.M. manuals. Please remember that all information contained in the O.E.M. manuals supersedes the information contained in this Owner's Manual.

Finally, if you are new to boating, be certain to learn the proper rules of seamanship to ensure your safety and the safety of your passengers. Refer to Chapman's Piloting, Seamanship and Small Boat Handling Manual for important and useful information concerning this aspect of boating. Attend a safe boating course offered by the United States Coast Guard Auxiliary, United States Power Squadron or any enterprise experienced in conducting safe boating courses.

Thank you for choosing a Silverton. I am confident your new yacht will provide you and your family with years of enjoyable cruising.



Richard Cerami, President
Silverton Marine Division

THE SILVERTON STORY

SILVERTON YACHT OWNERS AND FOUNDERS

WARREN LUHRS & JOHN LUHRS

Hailing from East Orange, New Jersey, John and Warren Luhrs' ancestry goes back to their great-grandfather, Henry, who helped pioneer the development of railroading and clipper ships in America, and to their great-uncle, John, who helped build the famous St. Petersburg-to-Moscow railroad for Russian Czar Alexander II.

Henry Luhrs owned shares in twenty-two different ocean-going vessels - barques, brigs and schooners - and was the principal owner of the barque, Sophia R. Luhrs, named after his wife. He was also a partner with Albert Sprout, who managed a shipyard in Melbridge, Maine, where the Sophia R. Luhrs was built.

The Luhrs' family sea tradition was carried on during the great Depression by John and Warren Luhrs' father, Henry, who worked at a small boat manufacturer in Morgan, New Jersey and later started his own company. When war broke out in Europe, the United States Coast Guard asked Henry Luhrs to repair their boats and install ice sheathing on their bows.

After World War II, Henry built 27-foot fishing boats and in 1948, he began to construct custom-built pleasure craft. He then turned to skiffs and in 1952, incorporated as "Henry Luhrs Sea Skiffs". He constructed lap strake sea skiffs using assembly-line techniques. Henry personally "shook down" his prototypes with family trips up the Hudson River to Lake Champlain.

Henry Luhrs' basic philosophy was to emulate the late Henry Ford in building an inexpensive boat for the average man, thus enabling him to enjoy the luxury of boating. He was both designer and engineer, creating innovative and progressive new models. He designed the change in the line of the bow from straight to curved at a time when all boats were being built with the straight, square effect. It is believed he was also the first designer-builder to popularize a small boat with a flybridge.

In 1960, Henry Luhrs acquired the Ulrichsen Boat Company, located in Marlboro, New Jersey. It was here, too, that the Luhrs Alura Fiberglass Division was located. In 1965, Henry sold his company to Bangor Arrostock Railroad, which was to become the recreational conglomerate, Bangor-Punta. It was also during this period that the Silverton Company, Toms River, New Jersey was purchased by his sons, John and Warren Luhrs.

Today John and Warren, own Silverton Marine Corporation, Hunter Marine Corporation, Mainship Motor Yachts Corporation and Luhrs Fishing Boats Corporation, known as the "Luhrs Marine Group."

In January, 1996, John and Warren transferred a portion of the Luhrs Marine Group to its employees through an Employee Stock Ownership Program, ensuring a personal interest in the construction of your Silverton yacht.

INTRODUCTION TO YOUR 43 MOTOR YACHT

Owner's Manual

We appreciate your selection of the Silverton **43 Motor Yacht**. We have designed and manufactured this yacht to bring you a strong, safe and attractive yacht that will provide you with many years of pleasure and pride in ownership.

All Silverton yachts are built in compliance with applicable United States Coast Guard regulations and recommendations. In addition, our yachts meet or exceed all standards developed by the National Marine Manufacturer's Association for its "Yacht Certification Program".

This Owner's Manual includes general information concerning the operation, handling and maintenance of your **43 MY**. In addition, the various systems and standard and optional factory installed equipment are described. **Please note that the information contained in this Owner's Manual summarizes the detailed information contained in the Original Equipment Manufacturer's (O.E.M.) manuals contained in the Owner's Packet and is only intended to be a convenient reference for your daily use.** Refer to the appropriate O.E.M. manual for detailed information concerning the operation and maintenance of its respective piece of equipment.

Maintain your Owner's Manual and the Owner's Packet together in a safe, convenient location that is easily accessible for readily available reference.

General information designed to assist you in understanding the contents of your Owner's Manual is as follows:

HAZARD COMMUNICATION

This Owner's Manual contains certain signal graphics designed to call your attention to important and specific information. These graphics are shown as follows:



DANGER calls attention to immediate hazards that **WILL** result in severe personal injury or death.



WARNING identifies hazards or unsafe practices that **COULD** result in severe personal injury or death.



CAUTION indicates hazards or unsafe practices that **COULD** result in minor personal injury or product or property damage.

OWNER ADVISORY STATEMENTS

This Owner's Manual contains certain advisory statements designed to alert you to conditions affecting equipment operation and maintenance practices and they are as follows:

Important: This is an advisory statement or procedure intended to prevent damage to equipment or its associated components.

Note: This is a general advisory statement relating to equipment and maintenance procedures intended to call your attention to important information that is not contained within the normal text describing the specific issue.

SUMMARY OF OWNER'S MANUAL CONTENTS

Brief summaries of each section of this Owner's Manual are as follows:

Introduction

This section includes general information about your **43 MY**, warranty information, your responsibilities as the owner and/or operator, laws and regulations, logs and records.

Getting Familiar With Your 43 MOTOR YACHT

This section is like a tour, showing you the various accessories and appliances, both standard and optional, that are found on your **43 MY**. In addition, the Hull, Deck, Interior and Engine Compartment will be described.

Boating Safety

This section discusses potential hazards associated with boating, safety recommendations, safety information and safety practices. It also discusses safety equipment necessary to provide a reasonably safe operating environment.

Note: For your safety, this Owner's Manual has specific safety warnings and comments where appropriate. Be certain to read and have an understanding of the entire manual.

Systems Operation

This section explains the various systems found on your **43 MY** and their operation and maintenance procedures.

Operation of Your 43 MOTOR YACHT

This section explains what procedures you should follow before, during and after your boating excursion to make it an enjoyable and safe experience.

Maintenance of Your 43 MOTOR YACHT

Preventive maintenance is the key to trouble-free operation and helps to protect your investment. This section explains what you should do to maintain your **43 MY** and how to make basic adjustments and repairs. A Maintenance Chart summarizes maintenance tasks by frequency. Included are procedures for winterizing and storing your yacht.

Glossary of Terms

The Glossary defines common nautical terms and terms associated with your **43 MY**.

Systems Schematics

This section displays schematic drawings, such as the Mechanical Layout, Electrical Schematic and Fresh Water Schematic that may be useful to you in understanding the general layout of the systems described.

Supplements

This section is for any updates to this Owner's Manual that are issued from Silverton at a date after this manual is published.

ORIGINAL EQUIPMENT MANUFACTURER'S MANUALS

Silverton purchased various items of equipment from other manufacturers and installed them on your yacht while it was being built. Examples of this equipment include, but are not limited to, the engines, generator (if so equipped) and appliances. The Original Equipment Manufacturers (O.E.M.) have provided operation and maintenance manuals describing their specific piece of equipment. **Although this Owner's Manual summarizes the information contained in the O.E.M. manuals, it does not replace them. In the event of a conflict between the information contained in this manual and the information contained in the O.E.M. manual, the O.E.M. manual takes precedence.** Maintain all O.E.M. manuals with this Owner's Manual in a safe, convenient location and be certain to pass them on to the new owner in the event you sell or trade your yacht.

WARRANTY INFORMATION

Silverton Yacht Dealers

Your Silverton yacht dealer is a trained professional with facilities and resources available to serve you to your complete satisfaction. Your dealer can assist you in all phases of yacht service and you should bring to his attention any problems you may not be able to correct. All warranty claims and subsequent service must be approved through your Silverton dealer. The Silverton warranty is reproduced in its entirety at the end of this section.

Pre-Delivery Service Record

Your Silverton yacht was thoroughly inspected before it was shipped from the factory. Your dealer also inspected it during the pre-delivery service inspection. Please take time to discuss these inspections, the Silverton warranty, component warranties and operation of your yacht with your dealer.

Your Silverton dealer completes a Pre-Delivery Service Record before you take delivery of your yacht. It is the dealer's responsibility to both you and to Silverton to give your yacht a final inspection. The purpose of this inspection is to assure the proper adjustment and operation of all components installed on your yacht. Your dealer should provide you with the Pre-Delivery Service Record at the time of delivery. After you and your dealer have signed the form, the original copy, along with your warranty card, is forwarded to Silverton.

Silverton will not pay warranty costs for items that should have been corrected during the pre-delivery service inspection and recorded on the Pre-Delivery Service Record.

Warranty Registration

All Silverton yachts are shipped to the dealer with a warranty registration form for the yacht. The warranty card should be completed and returned to Silverton, together with signed copies of the Pre-Delivery Service Record, within ten (10) days of delivery. **Failure to do so may void the warranty.**

Warranty Conditions

To avoid any misunderstanding of Silverton's warranty policy, we suggest that you discuss the following with your Silverton yacht dealer:

- ✘ All customer warranty claims and subsequent repairs must be approved through your Silverton dealer.
- ✘ Your yacht must be returned to your selling dealer for warranty repairs unless other arrangements between the dealer and the customer have been made before delivery. Silverton will not pay travel time or mileage for warranty claims.
- ✘ Silverton allows a set hourly rate for labor. If you use any service facility other than a Silverton dealer for warranty repairs, either the owner or the dealer must absorb any difference between what Silverton allows and what the "service contractor" may charge.

✖ Silverton will not assume any responsibility or liability for parts replaced or labor completed by anyone other than an authorized Silverton dealer without prior authorization from Silverton.

✖ Silverton will not warrant items that should have been covered during the pre-delivery service inspection.

✖ Silverton will not be responsible for any problems or inconveniences that may be caused as a result of a defect.

✖ Silverton will not be responsible for any losses caused as a result of a defect for any reason.

Second Owner's Warranty

Some Silverton yacht owners trade up to a newer or larger yacht before the warranty on their current yacht has expired. Silverton will transfer the remaining warranty on your new yacht to its new owner. Conditions of the warranty transfer are stated in their entirety at the end of this section.

Owner's Responsibilities

Silverton service and support does not end after you purchase your yacht. Our dealers are committed to your total satisfaction with your yacht. They cannot accomplish this objective without your assistance. You are responsible for:

✖ Obtaining state registration or federal documentation.

✖ Providing and maintaining all safety equipment required by the United States Coast Guard.

✖ Completing and forwarding all Original Equipment Manufacturer's warranty registrations.

✖ Performing and completing required OEM maintenance.

LIMITED WARRANTY

According to the U.S. Public Law No. 93-637, effective July 4, 1975, the following limited warranties apply to all 2001 Model Year boats produced by SILVERTON MARINE CORPORATION.

LIMITED ONE YEAR WARRANTY

SILVERTON MARINE CORPORATION warrants to the first-use purchaser and any subsequent owner during the warranty period that any part manufactured by SILVERTON will be free of defects caused by faulty workmanship or materials for a period of twelve (12) months from the date of delivery to the first-use purchaser under normal use and service. During this period, SILVERTON will repair or replace any part judged to be defective by SILVERTON.

LIMITED FIVE YEAR WARRANTY ON HULL STRUCTURE

SILVERTON warrants to the first-use purchaser and any subsequent owner during the warranty period that the hull of each boat will be free from structural defects in materials and workmanship for a period of five (5) years from the date of delivery to the first-use purchaser under normal use and service. This limited warranty applies only to the structural integrity of the hull and the supporting pan/grid or stringer system. Hulls, pan/grids or stringers modified in any way or powered with engines other than the type and size installed or specified by SILVERTON are not covered by this limited warranty. The obligation of SILVERTON under this limited warranty is limited to the repair or replacement of hulls that it determines to be structurally defective. This is your sole and exclusive remedy.

RESTRICTIONS APPLICABLE TO WARRANTIES

These limited warranties **do not cover:**

1. Bottom paint, paint, window glass, gelcoat, upholstery damage, plastic finishes, engines, engine parts, bilge pumps, stoves, blowers, pressure water pumps, propellers, shafts, rudders, controls, instruments and equipment not manufactured by SILVERTON. Any warranty made by the manufacturer of such items will be, if possible, given to the first-use purchaser.
2. Fiberglass blistering attributable, in the opinion of SILVERTON, to water penetration of the fiberglass (osmosis).
3. Problems caused by improper maintenance, storage, cradling or blocking, normal wear and tear, misuse, neglect, accident, corrosion, electrolysis or improper operation.
4. Speeds, fuel consumption and other performance characteristics because they are estimated and not guaranteed.
5. Boats used for commercial activities, including charter.

These limited warranties are your sole and exclusive remedies and are expressly in lieu of any and all other remedies and warranties expressed and implied, including the warranties of merchantability and fitness. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. The purchaser acknowledges that no other representations were made to him or her with respect to the quality and functions of the boat. Any consequential or incidental damages which may be incurred are excluded and purchaser's remedy is limited to repair or replacement of part(s) judged defective by Silverton. Some states do not allow the exclusion or limitation of incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

WARRANTY REGISTRATION

These limited warranties shall not be effective unless the SILVERTON Warranty Registration Form and Pre-Delivery Service Record, which are furnished with each new boat, are filled out completely and returned to SILVERTON within ten (10) days of delivery.

The return to SILVERTON of the fully signed Warranty Registration Form is critical. Warranty coverage cannot be initiated until the completed form is received at SILVERTON.

All repairs and/or replacements will be made by an authorized SILVERTON dealer, or at the option of SILVERTON, at the SILVERTON plant. If the repairs are

of such a nature that the warranty work must be performed at the SILVERTON plant, transportation costs to and from the SILVERTON plant shall be paid by the owner. The labor cost reimbursement will be based on the Labor Allowance Schedule established by SILVERTON and where not applicable, on a reasonable number of hours as determined by SILVERTON. Any repairs and replacements must be approved in advance by an authorized SILVERTON Service Representative.

TRANSFER OF LIMITED WARRANTIES

Effective with 1993 model year boats, these limited warranties will be transferred to a subsequent purchaser of the boat if:

1. A notice of the transfer of ownership of the boat is given by the subsequent purchaser in writing to SILVERTON within thirty (30) days of the transfer.
2. The notice shall include the name, address and telephone number of the subsequent purchaser, the date of purchase, the hull number and the name of the seller of the boat.

SILVERTON will mail to the subsequent purchaser notice of the expiration dates of the limited warranties. The transfer of the ownership of the boat will not extend the expiration dates of the limited warranties.

BOOKS AND PUBLICATIONS

Silverton recommends you purchase and read the following publications:

Piloting, Seamanship and Small Boat Handling

By Chapman

(included with this manual compliments of Silverton Marine Corporation.)

Boatman's Handbook

By Tom Bottomly

Motorboat and Sailing
P.O. Box 2319, FDR Station
New York, New York 10002

The Complete Book of Maintenance and Repair

By Dave Kendall

Doubleday and Company
Garden City, New York 11530

Pleasure Boating and Seamanship United States Coast Guard Auxiliary

306 Wilson Road Oaklands
Newark, Delaware 19711

RECORD KEEPING

Boat Record

Use the **Boat Record** (included at the end of this manual) to record all important information concerning your yacht and its equipment. After your dealer has recorded all the information, remove the record from your Owner's Manual and store in a safe, convenient location. **Do not** keep this form aboard your yacht.

Float Plan

The **Float Plan** (included at the end of this manual) provides a record of your destination, departure and return times, yacht description, passenger list and other information about the trip you have planned. At the bottom of the form is a space for listing emergency telephone numbers in case your return is delayed past the expected time. It also has space for indicating information about the person filing this report. Leave a copy of the completed form ashore with a responsible person. Carry the original form with you on your cruise and if you deviate from your original plan, be certain to notify the person with whom you left the copy of your change in plans. Silverton recommends you make several copies of this form each yachting season to ensure you have an adequate supply.

Maintenance Log

The **Maintenance Log** (included at the end of this manual) provides the means to keep maintenance records in one location. Using this log will allow you to track maintenance work completed and to determine when specific maintenance is required. Your Silverton dealer will also find this

information helpful if you decide to sell or trade your yacht. The maintenance record will make your yacht a more desirable purchase because it tells prospective buyers that you have maintained the proper care of the vessel on a regular basis.

ACCIDENT REPORTING

No one likes to think about having a boating accident, but unfortunately, they do occur. You must file an accident report after a boating accident just as you would after an automobile accident. A copy of the United States Coast Guard Accident Report is included with this Owner's Manual. You can obtain more copies of the report by calling the United States Coast Guard Boating Safety Hotline at 1-800-368-5647.

You are required to file an accident report with the United States Coast Guard within forty-eight (48) hours after the occurrence of an accident resulting in any one of the following:

- * Loss of life.
- * A person disappears from a vessel under circumstances that indicate the possibility of death or injury.
- * Personal injury requiring medical treatment beyond first aid.
- * Damage to the vessel or damage to property.*
- * Complete loss of the vessel.

* State statutes determine whether you must file an accident report in this case. An accident report must be filed if the damage exceeds a threshold dollar value

as established by the state in which the accident occurred. In most states, the threshold is \$100.00 to \$200.00. Contact the United States Coast Guard Boating Safety Hotline to verify the threshold for a particular state.

Note: State and local agencies may also have accident reporting requirements. Check with local enforcement agencies or with your local Silverton dealer regarding local requirements.


GETTING FAMILIAR with your 43 Motor Yacht

This section of your Owner's Manual will give you a virtual tour of your new 43MY.

The following areas will be described:

Hull, Deck, Interior, Bridge and Engine Compartment.

HULL

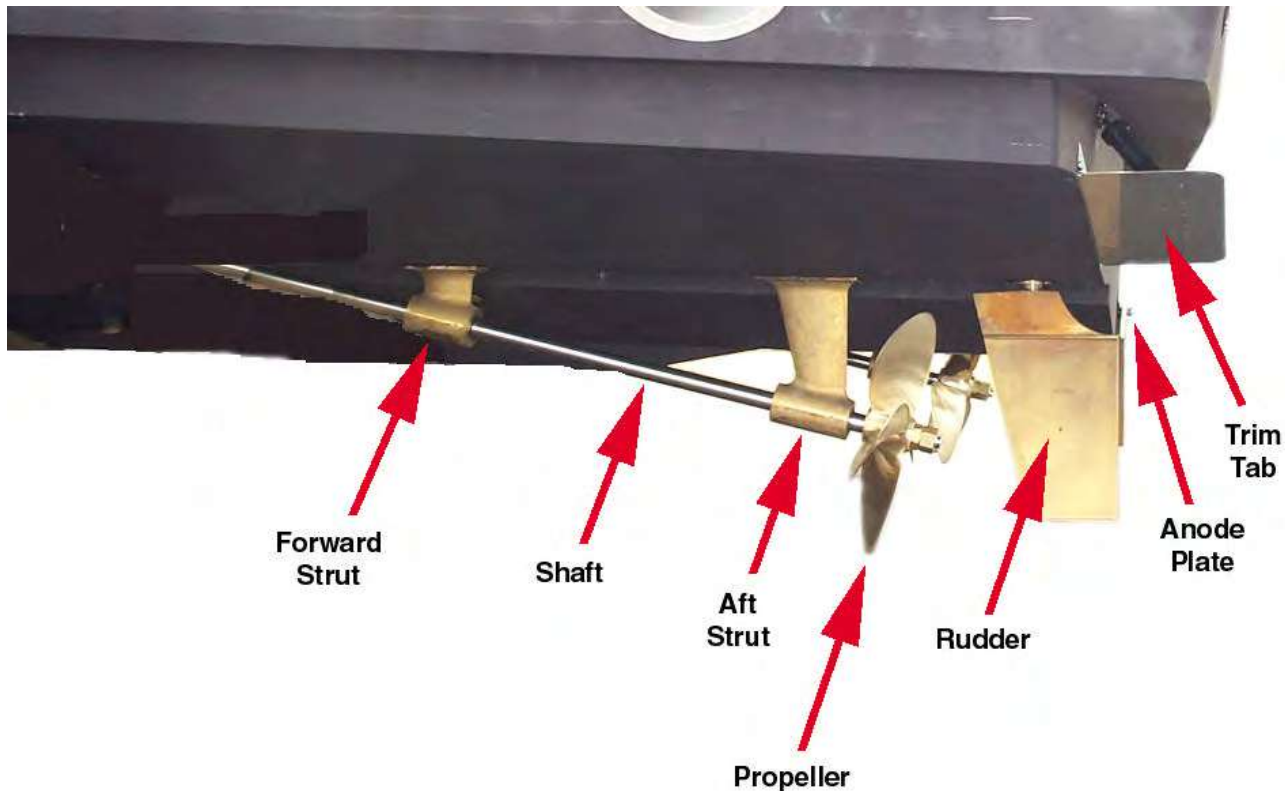

The **Shaft** is connected to the engine transmission with a coupling and extends through the bottom of the hull. The **Propeller** is attached to the end of the shaft. The shaft is supported forward of the propeller by two **Struts**. The struts support and stabilize the shafts. The rotation of the **Propellers** propel the yacht in the selected direction, controlled from the helm station.

The **Rudders** provide steering for the

yacht to port or starboard, depending on the direction they are turned by the operator from the helm station steering wheel.

The **Zinc Anodes** are dealer installed on the trim tabs, shafts, rudders and transom for the purpose of preventing electrolysis and galvanic corrosion, which is discussed in the Winterization and Storage pages in the Cleaning and Maintenance section of this manual.

ENGINE SEAWATER PICKUP

The photograph below displays the **Engine Seawater Pickup** as shown on the starboard side. The Engine Seawater Pickups are located on the bottom exterior of the hull forward of the engines and are used for “scooping” water for the engine cooling system.



TRANSOM ANODE PLATE

The photograph below displays the Transom Anode Plate, which is a sacrificial zinc anode that is bolted to the transom and connected to the electrical bonding system. Its purpose is to help in reducing the effects of electrolysis and galvanic corrosion of the underwater components in your yacht, which is discussed in the Bonding System pages in the Systems Operation section of this owners manual.





TRIM TABS

The photograph below displays the Port Trim Tab, which is factory installed on the lower edge of the transom. The starboard trim tab is located in the same location on the starboard side of the transom. The purpose of the trim tabs is to assist you in controlling the angle, both longitudinally and athwartships, that your yacht rides in the water during forward movement. The control panel for the Trim Tabs is located at the helm station.



PROPELLERS

The photographs below display the propeller rotation for the Port and Starboard sides.

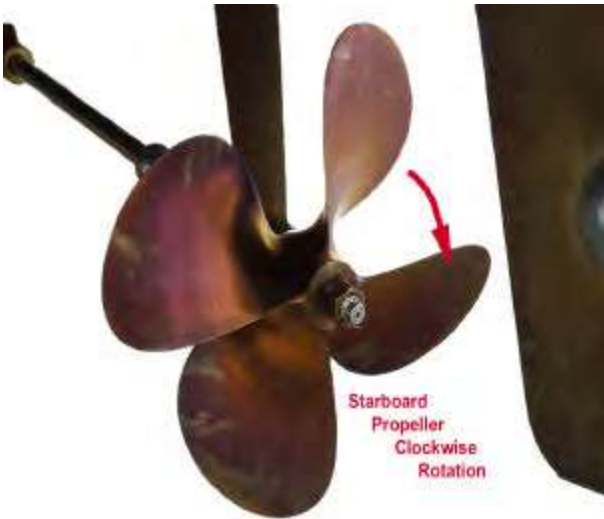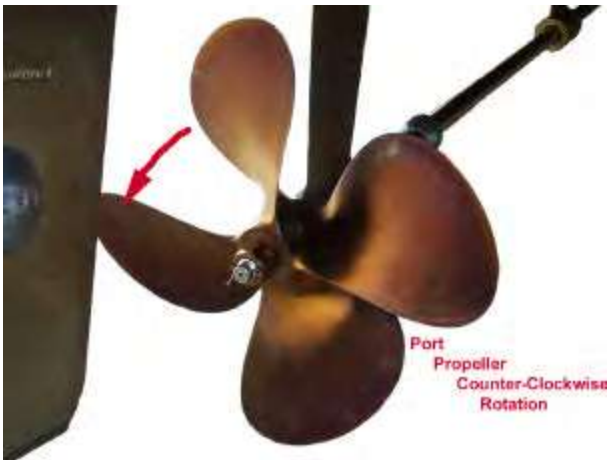

ENGINE EXHAUST PORTS



There are two Engine Exhaust Ports; one for each engine. The Port Engine Exhaust Port is located on the Port side of the hull forward of the transom and the Starboard Engine Exhaust Port is located on the Starboard side of the hull forward of the transom. The photograph above displays the Port Engine Exhaust Port. The Starboard Engine Exhaust Port is in the identical location on the port side of the yacht.

GENERATOR EXHAUST PORT

The photograph below displays the Generator Exhaust Port. It is located on the port side of the transom, outboard of the port trim tab.




DISCHARGE PORTS

The various **Discharge Ports** (also known as through-hull ports) are located on the starboard and port sides of the hull. Refer to the Thru-Hull Schematic Drawings in the SCHEMATICS SECTION of this manual.

FUEL TANK VENTS

The photograph below displays the **Port Fuel Tank Vent** as shown on the port side of the hull. The **Starboard Fuel Tank Vent** is located in the identical location on the starboard side of the hull.

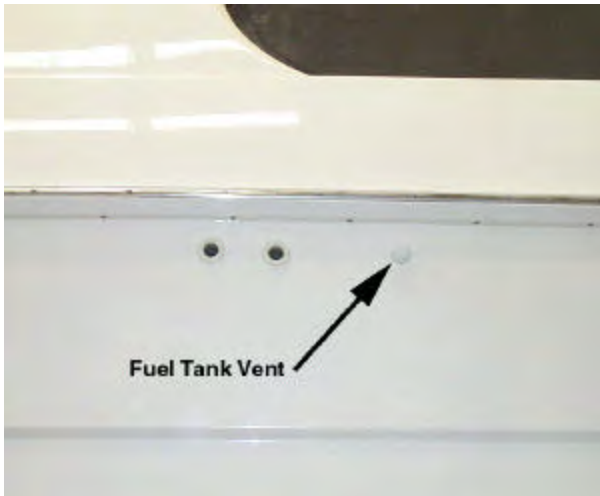

Note: Please refer to the Thru-Hull Location Schematics in the SCHEMATICS SECTION of this owners manual.

BILGE VENTS

Your 43MY has ventilation vents from the Engine Room. The amount of venting and the location depends upon the engine configuration of your 43MY. There are large vents located on both sides of the hull. The photo below shows the Starboard Engine Room Vent.




This is an always open vent that has no fan attached to it.

The Bilge Ventilation System Pages in the Operations Systems Section of this manual discusses the ventilation system. Be certain to read and have a thorough understanding of this section. It contains important information concerning The SAFE operation of your yacht. The photograph below displays the engine room blower vent on the starboard side of your yacht. There is also a vent on the port side of the boat.



DECK

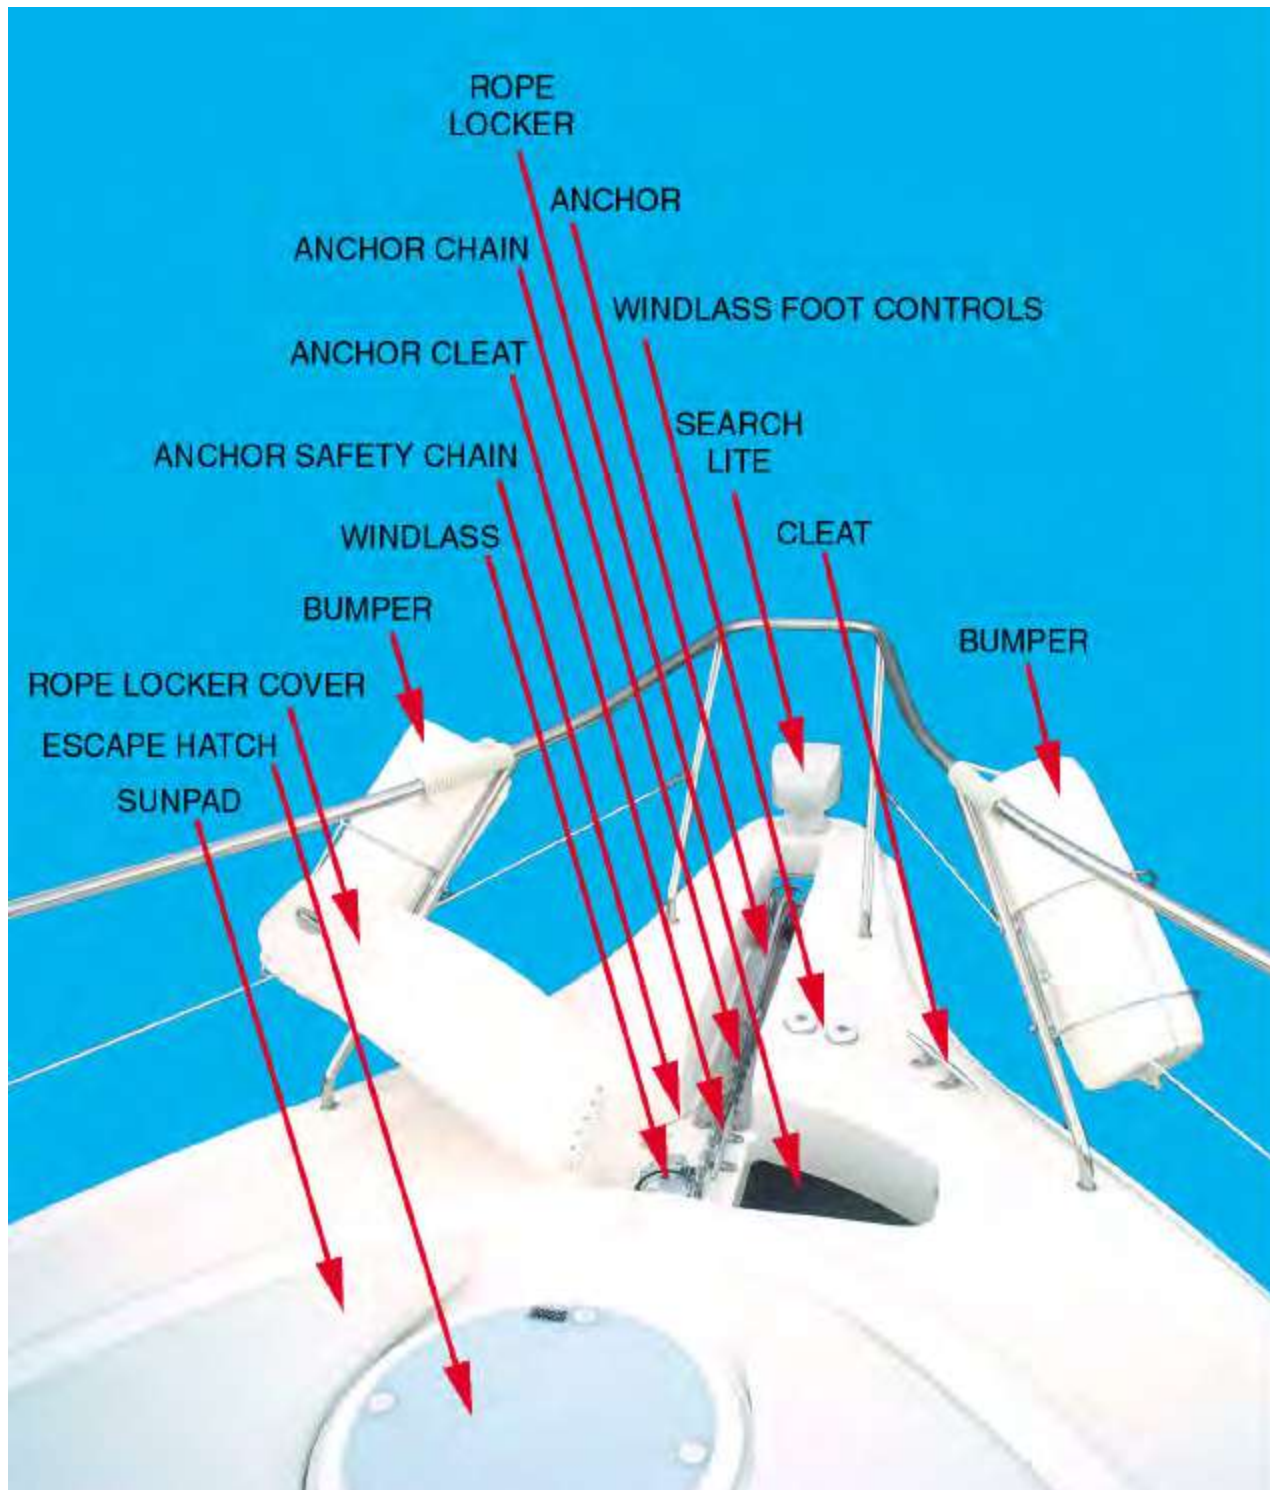


ANCHOR SYSTEM

The photograph below displays the location of the Anchor, which is located in its bracket under the pulpit.



The photograph below displays the optional Anchor Windlass and controls, which are located on the forward section of the deck immediately aft of the pulpit.

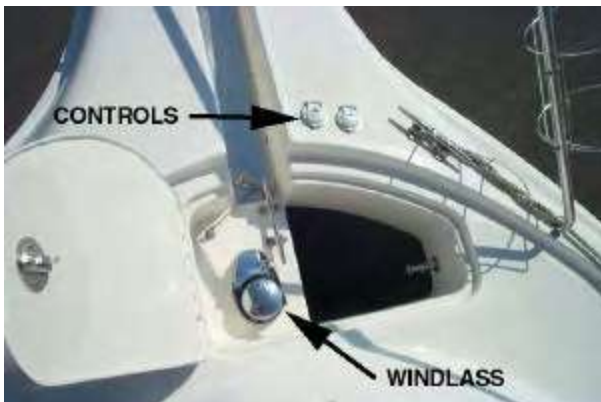

Refer to the Anchor System pages in the System Operations section of this owners manual for more information about your anchor system.

WARNING

Be certain to keep hands and feet away from any moving parts while operating the Anchor System. Becoming entangled in the anchor line may result in serious injury or death.

The photo below shows the Windlass Anchor Wench Control located at the helm.



SEARCH LIGHT

The 43MY may be equipped with an optional **Search Light**, which is mounted on the forward portion of the pulpit. The photograph below displays the Search Light.



The actual control switch for the Search Light is an omni-positional switch. It controls the kind of light that comes out of your search light. It can be either spot(S) or flood(F). The photo below shows the control, which is located at the Helm.



BRIDGE

HELM

The Helm, located on the Bridge of your 43MY, is where your yacht is piloted.



STARBOARD BRIDGE LOUNGE

Located on the starboard side of the bridge is the **Starboard Bridge Lounge**. The seat portions are removable and have storage underneath.



PORT BRIDGE LOUNGE

On the port side of the Bridge you will find the **Port Bridge Lounge**. The seat portion is removable and there is storage underneath.

The photo below shows the Port Bridge Lounge.



HELM SEAT

Aft of the Helm is the **Helm Seat**.



AIR HORNS

The factory installed **Air Horns** are mounted on the forward section of the bridge.



The button for the Air Horns is located at the Helm. The photo below shows the location of the button that sounds the Air Horns.



The Red Button is the Air Horn button.

NAVIGATION LIGHTS

The photographs below display the location of the Port, Starboard, and the Transom Navigation Lights and the combination Masthead/Anchor Light.



The Port Navigation Light is RED.



The Starboard Navigation Light is GREEN.



The Transom Light is located on the aft portion of the hardtop. The Transom Light is WHITE.



The Masthead/Anchor Light is also WHITE. The Navigation/Anchor Light switch is located at the helm station.

ACCESS STEPS

On both the starboard and port sides of your 43MY you have access steps from the Bridge to the Bow. There are also access steps from the Aft Deck to the Bridge. The photograph below displays the Aft Deck to Bridge Access Steps.



The steps from the Bridge to the Bow, are located on both the Port and Starboard sides. The photo below shows the Port steps.



INTERIOR

This section will show you the various interior compartments of your 43MY, starting with your entry into the Salon.

SALON ACCESS DOOR

The photograph below displays the **sliding Salon Access Door**.



SALON



Standing on the Galley Deck and looking aft, on your right, on the shelf behind the lounge is a door. Below this door is a large storage cabinet. The door has a spring hinge on it. The spring will keep the door open until the center of the spring is

tapped. At that point the spring collapses. To the left of the storage closet is a 120-volt outlet. Directly forward of the lounge and facing the galley is another storage cabinet. If you purchased the surround sound system the whoofer will be under this storage cabinet with a removable panel in front of it.

In front of the lounge is an adjustable dining table.

Going aft of the lounge you have a storage cabinet with two large doors. Aft of that cabinet is your entertainment center. The photo below shows the entertainment cabinet.



Below the entertainment center is a door. This is another storage cabinet. Aft of the cabinet top on the bulkhead is a 120 volt outlet. Above the outlet is the CO monitor. Going aft towards the Access door you have a large door. Opening this door you will find the ACDC Panel, Battery

Switches, and the meters for the waste tanks and the fresh water tank. The photo below shows the AC/DC Panel and the meters.



The light switches by the access door are for the salon lighting and outside overhead lights.

Below the access door is the exit/entry stairs. On the starboard side of the stairs is a storage cabinet. To the left of the stairs is the doorway into the Aft State-room. On the starboard side of the salon is another lounge.

Above the lounge on the aft bulkhead is two large storage cabinets.

Forward of the lounge above the galley counter is a 120 volt outlet. Just above those outlets you will see an AC Control Panel.

Directly behind you, above the forward stateroom door, is the 27" television.

GALLEY



Standing on the galley deck in front of the TV and looking to starboard.

Below the counter by the sink is a switch. This switch is for the overhead lights.

Under the sink is a large 2 door cabinet.

Above the counter are three cabinets.

In the corner, above the counter is the recessed coffeemaker.

To the left of the coffeemaker is the 120 volt outlet. To the right of the coffeemaker is a storage cabinet with 2 sliding doors.

Below the storage cabinet is the stove.

Under the stove is a large drawer.

To the right of the oven is a narrow storage cabinet. Above the counter to the right of the oven is a light switch.

The top switch is for the above counter lights. The middle switch is for the Galley night lights. The bottom switch is for the Galley exhaust.

To the right of the oven is the refrigerator.

Above the refrigerator is the microwave oven.

To the right of the oven is the slide-out pan rack. To the right of the refrigerator, below the counter you have three drawers and a large storage cabinet.

Above the entire galley is a large shelf. There are two vents on this shelf.

The aftmost vent is for the refrigerator. The other vent is for the A/C unit.

Do not block

either of these vents. If the vent is blocked it will stop air from reaching the refrigerator or A/C unit causing overheating. Also on this shelf you will see a speaker. the panel the speaker is attached to allows access to the A/C venting.

If you look downon the deck right below the TV you will see an access panel. This panel gives you access to the forward shower sump pump, the macearator, and the macerator discharge valve.

HEAD



Standing in the doorway from the forward stateroom. To the right, above the counter is a mirrored door. You open that door from

the bottom. This is a storage cabinet. Below that, on the counter, is the sink. To the left of the cabinet is the towel ring. To the left of that is a porthole. Under the porthole is a 120 volt outlet and a switch plate. The two switches are for the exhaust fan and the lights. To the left of the porthole is another storage cabinet with a mirrored door. To the right of this cabinet is the toilet. There is also access to this head from the Galley/Salon. Notice the clothes hook on the top of the door.

FORWARD STATEROOM



Facing forward with door closed, standing with back to entry. To the right is the door into the shower. To the left of that the switches for the shower(exhaust and lights). To the left of that switch plate is the switch plate for the lights. The dimmer switch is the lights in the Forward Stateroom, and the switch on the bottom is for the courtesy lights. Forward of that switch is a large cedar lined hanging closet.

Notice it lights up when opened. In this closet is a access panel that should be used when working on the shower unit. On the forward wall of the closet is the CO monitor for the forward stateroom. The A/C control unit, and a 120 volt outlet. Above the bed are the reading lights. Each light has its own control switch. Each control is next to the light it controls. Port-holes on both starboard and port sides. To the left is the private entry into the head. Further on that wall is a 120 volt outlet and the TV hook-up. Notice the small cabinet located below the counter. The escape hatch is above the bed. Below the bed at the foot of the bed you have four large drawers and two large storage cabinets. The two corner cabinets are lighted. Under the mattress are access panels. The large access panel gives you access to a large storage area. You also can access this storage area through a door on the port side of the bed, under the mattress. At the bottom of this area is another access panel. This panel gives you access to the forward A/C unit. If you purchased the Washer/Dryer Option the exhaust hose for the dryer would run through this cabinet. Be very careful not to puncture or collapse this flexible hose. Forward of this large storage area is another access panel. This is another storage area. If you purchased the Bow Thruster Option, this is where you would have access.

SHOWER

The shower has a Mirrored door storage cabinet. The cabinet opens from the bottom and has a spring latch. You have a Shower head with control. The lighting control for the shower is outside the door. Upper switch is for the exhaust fan lower switch is for the lights.

AFT STATEROOM



Standing on the steps facing aft, notice the sliding door entry. This door must always be secured in either the opened or closed position when underway. On the immediate right is the light switch. The top dimmer switch is for the main lights to the cabin. the bottom switch is for the courtesy lights in the aft cabin. Around the corner from the light switch is two storage cabinets. The bottom larger storage cabinet is a hanging closet. This cabinet is lighted. The light is activated when the door is opened. The upper cabinet is where the optional TV is put. Notice there is a 120 volt outlet and a cable hook-up in this closet. On the port side of these closets is the doorway into the Aft Shower. Looking into this shower while standing outside the doorway you can see the shower unit on

the right. The control for the shower unit is on the back wall. Also on the back wall is the towel rack. The lighting and the ventilation for the aft shower is controlled outside the shower by the vanity sink.

Looking to your left is the vanity area.

Below the sink is the storage cabinet.

Above the counter top on the back wall is a 120 volt outlet and a light switch on the right. The light switch has three controls. the left switch is for the lights over the vanity, center switch is for the lights in the aft shower, and the right switch is for the exhaust fan in the aft shower. Above this you have a storage area with 2 sliding doors. On the right wall is a towel rack, and on the left wall is the vanity/head mirrored medicine cabinet. The cabinet can be accessed from both the vanity and the head. To the left of the vanity is the aft head. Standing in the doorway and looking into the head notice on the right the other side of the medicine cabinet. Again a mirrored door. Down low and to the right of the toilet is an access panel. Above that is a shelf. Above the shelf is a light switch. This switch controls the ventilation and the aft head lights. Behind the toilet are removable access panels. To the left of these panels is a tall narrow storage cabinet with shelves.


To the left of the aft head on the aft bulkhead is a 120 volt outlet and the co monitor for the aft cabin. Below these items are a shelf. The entire wall below the shelf is removable. This gives you complete access to the aft area of your boat. This wall section is in two parts. On both sides of the bed unit are 3 storage cabinets, the forward closet is a large hanging closet, two are aft of the bed. All are cedar lined and are lighted when opened. Above the head of the bed are two reading lights. these lights are individually controlled. The

light switch for each unit is on either side of the bed. On the left side of the bed next to the reading light switch is the A/C control. Under the bed are 4 drawers. 2 drawers on the foot of the bed and 2 drawers on the right side of the bed. There is also 2 storage cabinets on each corner of the foot of the bed. There is an A/C intake vent on the aft portion of the lower bed. Do not block this intake vent.

Under the mattress are two access panels. The larger access panel is for access to the aft A/C unit. The smaller panel is a storage area. In this storage area is the air conditioning hose. Be very careful not to puncture or collapse this hose.

If you look on the deck in the aft stateroom you have four access panels. The forward access panel is for storage. The access panel on the port side is for access to the Aft Shower Sump Pump, the macearator, and the macearator discharge valve. The two access panels aft should be used for storage, but you must be very careful. This is the lowest part of the boat and it could get wet down there.

ENGINE COMPARTMENT

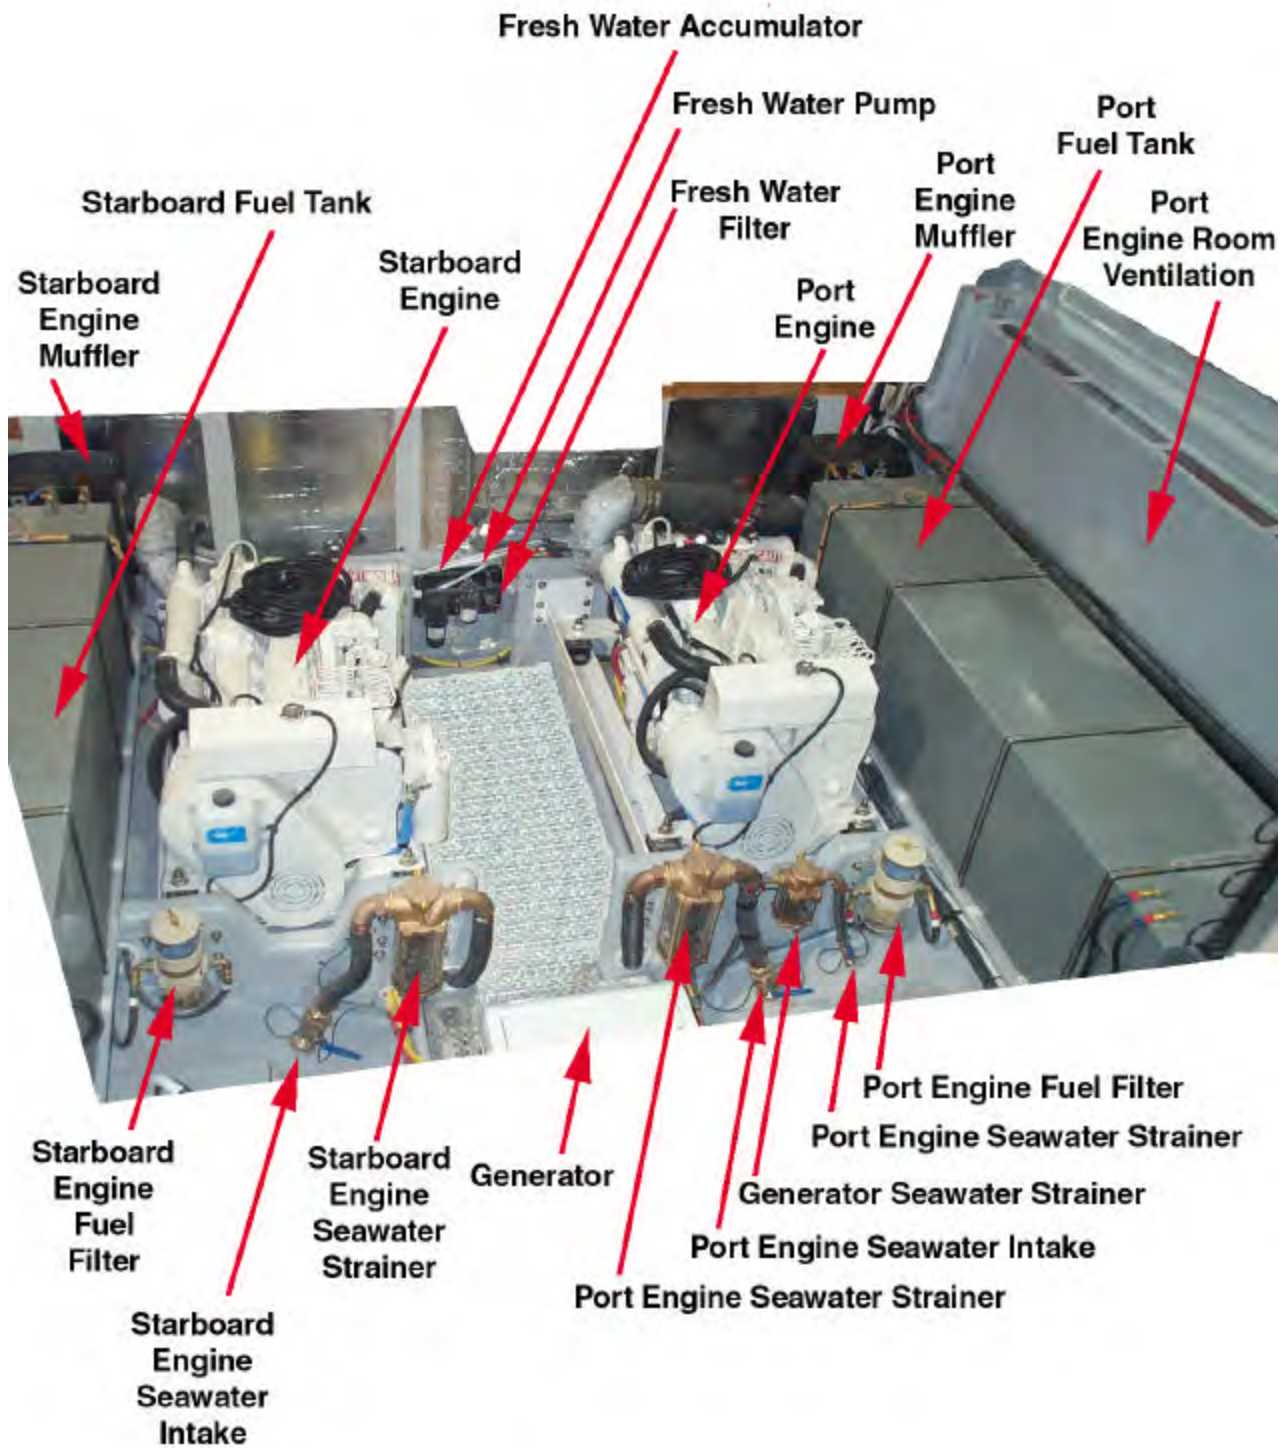

The Engine Compartment is accessed through the Access Panels in the Salon Deck. The photo below shows the Engine Room Access Panels.



BOATING SAFETY

Silverton believes your safety aboard your yacht, whether cruising or moored at your dock, is extremely important. A yacht operated in a safe manner will provide you, your passengers and other boaters many pleasurable hours of cruising and peace of mind. This section discusses the potential hazards that may be associated with boating for your awareness so they may be avoided, if possible. Be certain to read and have a thorough understanding of this section.

Silverton recommends completing a safe boating course if you are new to boating. Even if you are an experienced boater, you should consider enrolling in one of these courses as they will provide you with updated information that will prove to be valuable and enhance your cruising pleasure. Your local United States Coast Guard Auxillary and United States Power Squadrons offer comprehensive safe boating classes several times a year. You may contact them for a course schedule in your area or the Boat/U.S. Foundation at 1-800-336-BOAT, or in Virginia, at 1-800-245-BOAT.

Safety Equipment

Important: Federal Law requires you provide and maintain certain safety equipment on your yacht. As the yacht owner, you are responsible for providing all required safety equipment. Consult the United States Coast Guard and your state and local regulations to ensure your yacht is in complete compliance with all requirements concerning safety equipment on board. Additional safety equipment may be recommended for your safety and the safety of your passengers. Be aware of its availability and specific use.

Minimum Recommended Safety Equipment

- ✕ Required life saving equipment, including personal flotation and throwing devices.
- ✕ Required fire-extinguishing equipment.
- ✕ Required visual distress signal devices.
- ✕ First aid kit.
- ✕ Emergency position indicating radio beam (EPIRB).
- ✕ Manual bailing device.
- ✕ Anchor with sufficient line/chain.
- ✕ Flashlight with fully charged batteries.
- ✕ Binoculars.
- ✕ Whistle.
- ✕ VHF Radio.
- ✕ Navigational charts for your cruising areas.
- ✕ Fog Bell(boats over 39.4 feet).

If you need assistance, please feel free to contact our Customer Service Hotline at 1-800-882-9266.

Personal Flotation Devices (PFD's)

United States Coast Guard regulations require you to have at least one(1) approved Type I, Type II or Type III Personal Flotation Device(PFD) for each person on board. The PFD's must be of suitable size for each person aboard and must be maintained in serviceable condition and readily accessible. A minimum of three(3) PFD's(two wearable and one throwable) are required, regardless of the number of persons on board. Each of these Personal Flotation devices, commonly known as

“Life Jackets”, are described as follows:

TYPE 1(Wearable): This off-shore PFD has the greatest buoyancy. It is most effective for all waters where rescue may be delayed. Its design allows for turning most unconscious persons in the water from a face down position to a face up position, assisting in the prevention of drowning.

Type II(Wearable): This near-shore PFD provides less buoyancy than a Type I PFD. It is intended for use in calm, inland waters or waters where there is a greater chance of a quick rescue. It turns its wearer to a face up position as does the Type I PFD, but the turning action is not as pronounced. A Type II PFD may not turn as many persons to a face up position under the same conditions as would a Type I PFD.

Type III(Wearable): Classified as a flotation aid, the Type III PFD permits the wearer to place himself in a vertical or face up position, but it will not do it automatically as would a Type I or Type II PFD. The Type III PFD has the same minimum buoyancy as a Type II PFD, but it has little, or no, turning ability. It is intended for use in calm, inland waters where immediate rescue is probable. The Type III PFD is used most often by people participating in water sports, as it is generally the most comfortable type for continuous wear.

Type IV(Throwable): United States Coast Guard regulations require at least one (1) throwable Type IV PFD to be on board, regardless of the number of passengers. The Type IV PFD is not intended to be worn; it is intended to be thrown to a person who has fallen overboard and is conscious. The Type IV PFD is held by the user until rescued. The most common

examples of Type IV PFD's are buoyant cushions or ring buoys and they are required to be immediately available for use and in serviceable condition.

Note: United States Coast Guard regulations for the number and type of PFD's are the minimum required. Silverton recommends exceeding the minimum requirements for your safety and the safety of your passengers.

Fire Extinguishing Equipment

As a yacht owner, you are responsible to maintain a minimum number and type of portable fire extinguishers on board. All fire extinguishers must be approved by the United States Coast Guard and be readily accessible and in serviceable condition. United States Coast Guard classification includes foam, carbon dioxide and chemical fire extinguishing materials, which are described in detail in the **Portable Fire Extinguisher System Section** of this Owner's Manual. Be certain to read and have a thorough understanding of the portable fire extinguishing equipment. United States Coast Guard minimum requirements for portable fire extinguishers maintained aboard your yacht are as follows:

*** Yachts longer than 26 feet and shorter than 40 feet:** Two(2) Type B-I or at least one(1) Type B-II portable, hand-held fire extinguisher. If your yacht has a fixed fire extinguishing system approved by the United States Coast Guard, one(1) Type B-I portable fire extinguisher is required.

*** Yachts longer than 40 feet and shorter than 65 feet:** Three(3) Type B-I or one(1) Type B-I and one (1) Type B-II portable, hand held fire extinguishers. If your yacht has a fixed fire extinguishing system approved by the United States Coast Guard, two(2) type B-I or one(1) Type B-II portable fire extinguisher is required.

Note: United States Coast Guard regulations are the minimum requirements. Silverton recommends exceeding the minimum requirements for your safety.

Fire Safety

Fire safety is something that everyone who owns or operates a boat should practice. Each year, boating fires and explosions injure hundreds of boaters and cause millions of dollars in property damage. While there is a greater chance of a fire or explosion on a boat than on land, most of these accidents can be prevented. With a little effort on your part, fire prevention and fire safety are very attainable goals.

As owner of your yacht, it is your responsibility to:

- ✓ Have fire-fighting equipment inspected at regular intervals.
- ✓ Replace fire-fighting equipment, if expired or discharged, with devices of equal or greater fire-fighting capacity.
- ✓ Inform members of the crew and guests about:
 - the location and operation of fire-fighting equipment.
 - the location and operation of escape

hatches.

- ✓ Ensure that fire-fighting equipment is readily accessible.
- ✓ Keep passageways to exits and escape hatches clear of obstructions.
- ✓ Never allow the use of gas lights on board.
- ✓ Never leave the boat unattended when cooking or heating appliances are in use.
- ✓ Never modify any of the boat's systems(especially electrical, fuel, and ventilation).
- ✓ Never handle fuel of any type when machinery is running or when cooking or heating appliances are in use.
- ✓ Follow proper fueling procedures (discussed in the fuel safety section of this publication).
- ✓ Never smoke while handling fuel.
- ✓ Keep machinery and bilge areas clean and free of debris.
- ✓ Always sniff for fuel vapors before starting engines or generator.

If you need assistance, please feel free to contact our Customer Service Hotline at 1-800-882-9266.

Other good ways to prevent fire aboard your yacht is to keep the bilge areas clean and to check for fuel and gas vapors at regular intervals, and not to fit free hanging curtains or other fabrics in the vicinity of, or above, cookers or other open flame devices. Also combustible material should not be stored in the engine compartment.

If non-combustible materials are stowed in the engine space they shall be secured against falling into machinery and shall cause no obstruction to access in or from the space.



Fire prevention is something that you as the yacht owner are responsible for. Too much fire prevention is not possible. This is an area that is unfortunately often overlooked by boat owners. However, as long as this area is an important part of your boating safety preparation, you can help to make your journeys safer for not only for you, but your crew and family as well.

VISUAL DISTRESS SIGNAL DEVICES

The United States Coast Guard requires all boats operating on the coastal waters of the United States to maintain visual distress signal equipment (flares) on board. Coastal waters are defined as all waters, except rivers, streams and inland lakes. The Great Lakes and any river mouth greater than two (2) miles wide are considered coastal waters. All boats owned in the United States and operating on the high seas are required to carry visual distress signal equipment on board.

All visual distress signal devices are required to be maintained in serviceable condition and stowed in a readily accessible location. Equipment displaying a useful service life date must be within the specified usage date shown. Both pyrotechnic and non-pyrotechnic equipment must be United States Coast Guard approved.

Pyrotechnic visual distress signal devices and their associated equipment include the following:

- ☆ Red Flares - Hand held or aerial.
- ☆ Orange Smoke - Hand held or floating.
- ☆ Launchers for aerial red meteors or parachute flares.

Non-pyrotechnic visual distress signal devices include the following:

- ☆ Orange Distress Flag.
- ☆ Dye Markers.
- ☆ Electric Flashing Distress Light.

No single visual distress signal device is perfect for all conditions or purposes. Silverton recommends carrying various types of devices as described above. Careful selection and the proper stowage of visual distress signal equipment is extremely important. If young children are frequently aboard, you should select devices with packaging which children, but not adults, will find difficult to open.

Sound Signaling Devices

The United States Coast Guard requires all boats over 16 feet in length to have a device that is capable of producing a sound signal when conditions require. Boats greater than 26 feet and less than 39 feet, 4 inches, must have a sound signaling device that is capable of producing a four (4) second blast, which can be heard at least one-half mile away. The device may be either hand held or power operated. Boats greater than 39 feet, 4 inches must have in addition to the above sound signaling device, a whistle and a bell, which must meet or exceed the

requirements of the Inland Navigational Rules Act of 1980.

Refer to the United States Coast Guard publication "*Navigational Rules, International-Inland*" for specific requirements of sound signaling devices.

Navigation Lights

The United States Coast Guard requires all boats that are operated during the hours of darkness or when visibility is impaired, be equipped with navigation lights that are illuminated. Observe all rules of navigation when meeting or passing another vessel. **DO NOT** operate your yacht at high speeds during night operation or when visibility is impaired. A good rule to follow is to **NEVER** operate your yacht at a greater speed than that which would prevent you from stopping within the distance of your visibility.

Always use common sense and good judgement when operating your yacht at night or during restricted visibility.

Refer to the United States Coast Guard publication "*Navigational Rules, International-Inland*" for specific navigational lighting requirements.

Additional Safety Equipment

You should consider having additional equipment on board your yacht to help make your cruising experience safer and more enjoyable. Some examples of this additional equipment are as follows:

- ✓ Anchor with chain and/or line.
- ✓ Boat hook.
- ✓ Bucket and sponge.

- ✓ Commonly used spare parts, such as hose clamps, spark plugs, etc.
- ✓ Compass.
- ✓ Docking lines.
- ✓ Engine and accessory manuals.
- ✓ Extra keys.
- ✓ Extra V-belts.
- ✓ Fenders.
- ✓ First aid kit.
- ✓ Flashlight with extra batteries.
- ✓ Manually operated bilge pump.
- ✓ Navigational charts for your cruising area.
- ✓ Owner's Manual.
- ✓ Replacement light bulbs.
- ✓ Ship-to-Shore radio.
- ✓ Spare fuel and oil filters.
- ✓ Spare propeller with fastening hardware.
- ✓ Tool kit.

Navigation Rules of the Road

Navigating your yacht is much the same as driving an automobile. Operating either one responsibly means complying with a set of rules intended to prevent accidents. Just as you assume other automobile drivers know the rules of the road and expect them to abide by them, other boaters assume the same of you. As a

responsible yachtsman, you must comply with the “**Rules of the Road**”; the marine traffic laws enforced by the United States Coast Guard. There are two(2) sets of rules: The **United States Inland Navigational Rules** and the **International Rules**. The United States Inland Navigational rules apply to all vessels operated within the demarcation lines separating inland and international waters. The United States Coast Guard publishes the “**Rules of the Road**” in its publication “*Navigational Rules, International-Inland*”. You can obtain a copy of this publication from your local United States Coast Guard Unit or the United States Coast Guard Headquarters, 1300 “E” Street NW, Washington, D.C. 20226.

Other helpful publications available from the United States Coast Guard include, “*Aids to Navigation*” (Pamphlet #123), which explains the significance of various lights and buoys; “*Boating Safety Training Manual*”; “*Federal Requirements For Recreational Boats*”. Be certain to check with your local United States Coast Guard station, your Silverton dealer or a local marina concerning navigational aids unique to your yachting area.

It is impossible to establish rules for every type of yachting situation. Therefore, it is extremely important to use common sense and good judgement when operating your yacht. Some of the basic rules to follow are:

- ✕ Always adhere to navigational rules to avoid collisions.
- ✕ Less maneuverable boats generally have the right-of-way. Always steer clear of the Stand-on vessel (boat having the right-of-way) and pass to its stern in a crossing

situation.

✕ If a collision appears unavoidable, **BOTH** vessels must act **IMMEDIATELY**. Prudence **ALWAYS** takes precedence over the right-of-way rules if a collision is imminent.

✕ **NEVER** send a “**MAYDAY**” message unless there is a serious emergency and you are in need of immediate assistance.

Be certain you understand important terminology distinctions:

Power Driven Vessel

A boat propelled by an engine, including a sailboat propelled by an engine and sails.

Sailing Vessel

A boat propelled by sail only, with no engine in operation.

Vessel Engaged In Fishing

A commercial fishing boat with apparatus that restricts its maneuverability (does not include trolling lines or other apparatus that does not restrict its maneuverability).

Vessel With Restricted Maneuverability

Any vessel, due to its size, draft or cargo, that is restricted in its ability to maneuver in a certain waterway.

Underway

Any vessel not anchored, not made fast to shore and not aground, whether or not it is under power or sail.

Basic Rules of Navigation

Power driven vessels must give the right of way to the following:

- ✕ A vessel unable to maneuver.
- ✕ A vessel whose maneuverability is restricted.
- ✕ A sailing vessel.

Sailing vessels must give the right of way to the following:

- ✗ A vessel unable to maneuver.
- ✗ A vessel whose maneuverability is restricted.
- ✗ A vessel engaged in commercial fishing.

Vessels engaged in commercial fishing must give the right of way to the following:

- ✗ A vessel unable to maneuver.
- ✗ A vessel whose maneuverability is restricted.

Basic Rules of Safe Boating

✗ Drugs and/or Alcohol and Boating DO NOT Mix. Drugs and/or alcohol decrease your reaction time, impair your judgement and inhibit your ability to safely operate your yacht. As a responsible boater, you will refrain from using drugs or alcohol (singly or combined) while you are operating your yacht. Operation of motorized vessels while under the influence of drugs and/or alcohol carries a severe penalty.

✗ Always maintain your yacht and its equipment in safe operating condition. Inspect the hull, engines, safety equipment and all boating accessories on a regular basis.

✗ Be certain lifesaving and fire extinguishing equipment is on board. This equipment must meet or exceed regulatory standards and it should be noticeable, easily accessible and in proper operating condition. Your passengers should know where this equipment is located and how to use it.

✗ Be certain you have sufficient fuel on board for your anticipated cruising requirements. In general, anticipate using 1/3 of

your fuel supply to reach your destination and 1/3 of your fuel supply to return. Always maintain 1/3 of your fuel supply in reserve for changes in your plans due to unforeseen weather conditions or other circumstances.

✗ Use **EXTREME CAUTION** while fueling your yacht. Be certain you know the capacity of the fuel tank(s) and the amount of fuel you consume when operating at your normal cruising speeds. Read and have a thorough understanding of the **Fuel System Pages** in the Systems Operation Section of this Owner's Manual. It contains valuable information and warnings that, if strictly adhered to, will enhance your yachting pleasure and safety.

✗ Check the weather forecast before getting underway. DO NOT venture out if the weather is, or is expected to be, threatening. While underway, always be cognizant of changing weather conditions by frequently checking the local forecast. Monitor strong winds and electrical storms closely and head for sheltered waters or your marina BEFORE they are encountered.

✗ Always maintain accurate, updated charts of your cruising area on board and refer to them frequently. DO NOT rely on your memory of an area. All waters, particularly tidal waters, are subject to constant changes, such as shoaling and underwater hazards.

✗ Always file a Float Plan with a responsible person before you depart on your cruise. A blank Float Plan is in the back of the Owner's Manual.

✗ Instruct at least one other person on board your yacht in its basic operating

procedure. This person can take over the operation of your yacht if you unexpectedly become unable to do so.

✘ DO NOT permit your passengers to ride on parts of your yacht that are not intended for passenger use, such as the gunwales or the bowrail.

✘ Ask all persons to remain seated while your yacht is in motion, particularly during inclement weather.

✘ DO NOT use the swim platform or boarding ladder while the engines are in operation, whether or not your yacht is in motion.

✘ Always maintain a good lookout. Keep away from swimmers, divers and water-skiers. They should display a flag when engaged in these types of water sports, but DO NOT rely upon it; if you suspect that type of activity, it is best to avoid that area, if possible.

✘ Understand and obey the “Rules of the Road”.

✘ Understand and obey all local boating laws.

✘ Always maintain complete control of your yacht.

✘ Finally, ALWAYS operate your yacht with care, courtesy and common sense.

Voluntary Safety Inspections

The United States Coast Guard Auxiliary and boating officials in many states offer courtesy safety inspections of your yacht at no charge to you. They will examine your yacht for compliance with all safety standards and required safety equipment. You may voluntarily consent to one of these inspections and you are given sufficient time to make necessary corrections without fear of prosecution for any discrepancies found. Contact your local United States Coast Guard Auxiliary or appropriate state agency for details concerning these courtesy safety inspections.

CARBON MONOXIDE SAFETY

CARBON MONOXIDE CAN KILL!

This section is intended to provide educational information about carbon monoxide relative to boats and boating. Carbon Monoxide accumulation is affected by boat geometry, hatch, window and door openings, ventilation openings, proximity to other structures and boats, wind direction, boat speed, boat maintenance and a multitude of other variables. This section discusses many of these and enables the boat owner to better understand some of the more predictable effects. However, this information is limited in that it cannot cover all conceivable variables. Therefore, the boat owner is cautioned not to exclusively rely on it to prevent the accumulation of carbon monoxide.

WHAT IS CARBON MONOXIDE?

Carbon monoxide is a highly poisonous gas formed by the combination of carbon and oxygen. Commonly referred to as CO, its chemical formula, “C” for carbon and “O” for oxygen. CO is a colorless, odor-

less, and tasteless gas that by itself can not be detected by human senses. CO diffuses in the air much more rapidly than any other gases that are detectable by the human senses. The weight of CO is about the same as air so it does not rise or fall like other gases but will distribute itself throughout the boat. CO is produced any time a material containing carbon is burned. In boating these materials include, but are not limited to, gasoline, diesel fuel and propane. All carbon based fuels produce varying amounts of CO, depending on their carbon content. Gasoline is high in carbon and therefore produces high levels of CO. Diesel fuel is low in carbon and therefore produces lower levels of CO. However, the exhaust of all engines and generators as well as any open flame device produce CO and the same precautions should be taken regardless of the type of fuel.

HOW A PERSON IS AFFECTED BY CARBON MONOXIDE

When breathed, carbon monoxide is absorbed by the lungs and reacts with the blood hemoglobin to form carboxyhemoglobin, which reduces the oxygen carrying capacity of the blood. The result is a lack of oxygen for the tissues with the subsequent tissue death and, if prolonged, death of the individual. Carbon monoxide in high concentrations can be fatal in a matter of minutes. Even lower concentrations must not be ignored because the effects of exposure to CO are cumulative and can be just as lethal. Certain health related problems and age increase the effects of CO. People, who smoke or are exposed to high concentrations of cigarette smoke, consume alcohol or have lung or heart disorders are particularly

susceptible to an increase in the effects from CO. However, the health of all of the boat's occupants should be considered. Physical exertion accelerates the rate at which the blood absorbs CO. The early effects of CO poisoning are easy to overlook because they are similar to the effects of other boating related stresses such as eye strain, fatigue, sun exposure, seasickness, or alcohol consumption. But as the concentration of CO in the air increases, it has increasingly adverse effects on your health.

One or more of the following symptoms can signal the adverse effects of carbon monoxide accumulation. The order of this list is generally the sequence of symptoms. However, the number of symptoms and the order of appearance may change for different people:

- Watering and Itching eyes
- Flushed Appearance
- Throbbing temples
- Inattentiveness
- Inability to think coherently
- Ringing in the ears
- Tightness across the chest
- Headache
- Drowsiness
- Incoherence
- Nausea
- Dizziness
- Fatigue
- Vomiting
- Collapse
- Convulsions

WHAT TO DO WHEN SOMEONE IS OVERCOME WITH CARBON MONOXIDE

When someone falls victim to carbon monoxide poisoning, fast and responsive action is crucial. Know the symptoms. The earlier effects of CO are detected the better the chance for recovery. The following list shows the sequence of events that must be done in an effort to revive a CO victim:

Evacuate, Ventilate, Investigate, Take Corrective Action

Move the person to fresh air

Administer oxygen if available

Contact medical help

If the victim is not breathing, perform artificial respiration per approved CPR procedures until medical help arrives and takes over. Prompt action can make the difference between life and death.

Ventilate area

Investigate the source of CO and take corrective actions.

HOW DOES CARBON MONOXIDE ENTER YOUR BOAT?

Any device that burns fuel creates carbon monoxide. For example, a propane cooktop or a space heater are both potential sources for CO. But the most serious danger comes from the gasoline engines and generators aboard your own and neighboring boats. There are four basic ways that CO from a running engine or

generator can enter your boat:

The “station wagon effect” results from the aerodynamics of deck cabins and flying bridges. With the boat under way, the air flow over the top forms a low pressure area behind the cabin or transom which can suck exhaust gasses into the cockpit and the cabin. Inefficient trim angles also can cause the station wagon effect.

Obstructions are principally a problem when boats are rafted together or tied to a dock or seawall. Against an obstruction, exhaust gasses which normally dissipate may instead be directed back to your boat. Beware of open windows, hatches, doors and the location of the engine intake. Exhaust contains particularly high concentrations of CO when an engine is cold; so to protect yourself and your neighbors, minimize the time spent getting underway. Pay particular attention to potential obstructions when running a generator for long periods.

Infiltration of CO from a neighbor’s exhaust can be a problem aboard any boat at any time. Infiltration can happen any time your neighbors are running a generator or engine, even when they are many slips away.

Leaks in your own exhaust system from the engines or generator can allow harmful levels of CO to accumulate at a surprising rate. Good maintenance practices are critical to avoid this.


There are many variables that combine to affect the accumulation of carbon monoxide. Some of these variables are; the presence of weather enclosures and covers, boat layout and configuration, location of ports, hatches, windows, doors,

and vents, proximity and types of structures and other boats, wind speed and direction, speed of the boat, etc. Although it would be impossible to identify every variable or combination of variables that may affect the accumulation of carbon monoxide, the boat operator must remain aware at all times of the possibility of CO accumulation.

The following illustrations show some of the ways that carbon monoxide gas can accumulate in your boat while at dock and underway. Become familiar with these examples to prevent exposure to this poisonous gas.

! DANGER

Blocked hull exhaust outlets near a pier, dock, seawall, bulkhead or any other structure can cause excessive accumulation of Carbon Monoxide Gas(CO) within the cabin areas of your yacht. Be certain hull exhaust outlets are not blocked in any way.

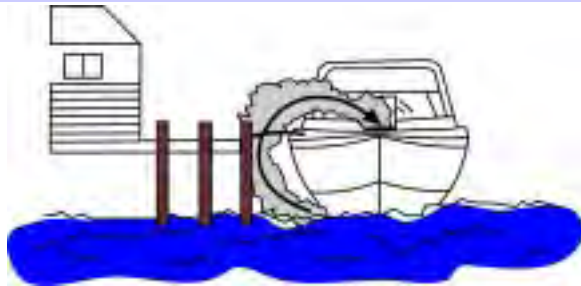

! DANGER

Engine and generator exhaust from other vessels alongside your yacht, while docked or anchored, can cause excessive accumulation of Carbon Monoxide Gas(CO) within the cabin and cockpit areas of your yacht. Be alert for exhaust from other vessels.



! DANGER

When protective weather coverings are in place, engine or generator exhaust from your yacht, while docked, at anchor, drifting or underway can cause excessive accumulation of Carbon Monoxide Gas(CO) within the cabin and cockpit areas of your yacht. Always provide adequate ventilation when the weather coverings are in place and either the engine or the generator are running.



! DANGER

Engine or generator exhaust from your yacht while underway at a slow speed can cause excessive accumulation of Carbon Monoxide Gas (CO) within the cabin and cockpit areas of your yacht. A tail wind can increase the accumulation. This is often referred to as the "Stationwagon Effect". Always provide adequate ventilation or increase your speed, if possible.



! DANGER

Engine or generator exhaust from your yacht while underway and operating with a high bow angle can cause excessive accumulation of Carbon Monoxide Gas (CO) within the cabin and cockpit areas of your yacht. Always provide adequate ventilation and redistribute the load to lower the bow angle.



HOW TO MINIMIZE THE ACCUMULATION OF CARBON MONOXIDE

Practice good inspection and maintenance habits.

Be certain hull exhaust outlets are not blocked or restricted in any way.

Be alert for exhaust gasses from other boats.

Always provide adequate ventilation when weather enclosures are in place and engines or generator is running.

Do not run with a high bow angle. Use trim tabs or redistribute the load to maintain a low bow angle.

Orient your boat to maximize the dispersion of CO.

Be aware of the effects of your actions on other boats.

Be aware of the effects of the actions of others on your boat.

Provide adequate ventilation when open flame appliances are used in the cabin.

PREVENTIVE MAINTENANCE

Frequent inspections and proper maintenance of the engine, generator, and exhaust systems as well as other various areas of your boat are critical in preventing the accumulation of carbon monoxide. It is the owner's responsibility to make sure that the entire boat is inspected and maintained against CO.

The exhaust systems of your engines and

generator are under constant attack from salt water, gasses, vibration and normal wear. Inspect every exhaust system component often. Start with a visual inspection. Check each joint for discoloration, carbon buildup, stains, water leaks or other signs of damage. Inspect all metal parts for corrosion, discoloration or flaking. Check that all hose clamps are in good condition and properly tightened. Carefully inspect all exhaust and cooling hoses for signs of wear, dry rot, cracking, discoloration, chafing or swelling. If any of these conditions exist, have the entire system inspected and corrected by a qualified technician before starting the engines or generator.

Next, start each engine and generator one at a time. Follow the full run of the exhaust system, listening and looking for leaks. While doing this, make sure there is adequate ventilation and that your CO detector is on.

Other items to inspect are as follows: Check that access panels around the engine and exhaust are in place and fit snugly to minimize the opportunity for CO to enter the cabin. There should be no large openings where CO could enter the cabin. Ensure that all ventilation systems are in good working order, and not blocked or punctured. Check all sink drains to assure that they have a good water trap to prevent CO from coming in from the outside.

Finally, because poor running engines produce excessive CO, make sure engines and generator are tuned up. They should run smoothly and not produce black smoke. The spark plugs and ignition systems should be maintained regularly,

and the fuel system and air filters should be in good order.

CARBON MONOXIDE DETECTORS

If you carefully avoid potential CO accumulation and maintain your systems properly, you have made great strides towards protecting yourself and others from the dangers of carbon monoxide. Another important line of defense is a CO Detector, used whenever you're aboard your boat. A detector is the only way to properly detect the presence of CO. There is a CO detector located in every living area on your Silverton Yacht. These CO detectors are UL Approved for Marine Use. If you replace the CO detectors at any time, they must be replaced with marine CO Detectors, not residential detectors. Most CO detectors require specific maintenance procedures to remain accurate and functional. Follow the manufacturer's instructions supplied to you in your owner's packet. Carbon Monoxide Detectors should be installed in all boats and the operation of them should be known by all aboard.

Fuel Safety



Gasoline and Diesel Fuel are extremely flammable. Proper handling is necessary to provide for the safety of you and your yacht.

- * DO NOT smoke while fueling.
- * Make sure that all accessories, both engines, and generator are turned off before beginning to fuel your yacht.

- ✴ When fueling your yacht in warm weather, allow for expansion of the fuel and do not top off the fuel tanks. The tanks may overflow when the fuel expands after being pumped out from cool, underground tanks or when the air temperature is cool, such as early morning or evening.

- ✴ Always handle fuel with care.

- ✴ Never store fuel in portable containers aboard your yacht.

EMERGENCY SITUATIONS

Swamped or Capsized Yacht

If your yacht becomes swamped or capsizes, immediately put on a PFD and set off a visual distress signal. A swamped or capsized yacht will normally stay afloat.

DO NOT leave your yacht or attempt to swim to shore, except under extreme conditions, such as fire or explosion. A capsized yacht is much easier to see by a potential rescuer than a person swimming, resulting in a greater chance of rescue. If you attempt to swim to safety, the shore may be farther away than it appears and you may tire and not be able to reach your destination, resulting in possible drowning.

Hypothermia

If a person falls overboard or is in the water due to a swamped or capsized yacht, hypothermia may be an immediate concern. Hypothermia exists when the body loses heat faster than it can replace it. If not rescued within a short period of time, the person will become exhausted and likely drown. In general, the colder the water, the shorter the time for survival. If the person is wearing a PFD, it will greatly increase his survival time as they act as

an insulator and will also keep the person afloat even if he is unconscious.

Collision

If a collision occurs, the following procedure should be strictly adhered to:

- ✴ Be certain all passengers put on their PFD. If a passenger is unable to put on his own PFD due to a disabling injury, assist him.

- ✴ Examine all persons on board for any injuries and administer first aid, if necessary.

- ✴ If your yacht has a VHF radio, contact the United States Coast Guard and any other potential rescue vessel and advise of your situation and location. VHF radio contact may be made on Channel 16 and Citizen's Band(CB) radio contact may be made on Channel 22.

- ✴ Inspect your yacht to determine the extent of damage and its potential for sinking.

- ✴ Prepare to assist the other craft and its passengers, if possible.

- ✴ If the collision resulted in penetration of your hull, prepare to quickly plug the fracture with a spare life jacket or bunk cushion once the vessels are separated.

- ✴ Before plugging the fracture, trim the yacht to place the damaged section above the water level.

- ✴ Remain with your yacht until assistance arrives.

Running Aground

* If your yacht runs aground, examine everyone on board for injuries and render first aid, if necessary.

* Examine your yacht for damage to the hull and running gear. If no serious damage is noted, attempt to free the yacht by shifting weight to the bow to raise the stern and then reverse the engines and back out of the shallow water into deeper water.

* If towing is necessary, **DO NOT** attach the tow line to the deck cleats. They are not designed to take the full load of the yacht under pressure.

Silverton recommends using a commercial towing service for your safety and to decrease the potential for additional damage to your yacht as a result of removing it from the underwater obstruction.



NEVER attach a tow line to a deck cleat or anchor windlass. The cleat or windlass may pull free from the deck and cause serious personal injury or property damage.

Hazardous Weather Conditions _

Storms

Storms rarely appear without some advance warning. Check the local weather forecast before you leave port, but be aware that weather conditions can change rapidly. If you have a VHF radio, listen to the continuous weather reports issued by

the National Weather Service. If you have a portable radio, keep it tuned to a station that broadcasts frequent weather reports. If you are tuned to an AM frequency, listen for static; it often means an electrical storm is approaching. Many boating clubs fly weather signals in the form of flags or lights. Learn to recognize these signals.

Your surroundings can also be a good indicator of changing weather conditions. Watch for changes in wind direction or cloud formations. There is no substitute for a good understanding of typical weather conditions and what to do when it takes a turn for the worse.

Fog

Fog is the result of either cold air passing over a warm earth surface or warm air passing over a cold earth surface. You can judge the likelihood of fog formation by periodically measuring the air temperature and the Dew Point temperature (temperature at which moisture in the air will develop), which is given during a normal weather forecast. If the difference between these two temperatures is small, fog is likely to develop. Always remember the following guidelines if you encounter fog conditions:

- Unless your yacht is well equipped with charts, head for shore at the first sign of fog and wait until conditions improve before continuing your cruise. If you have charts on board, take your present location bearings as the fog sets in, mark your position and continue to log your course and speed.
- **REDUCE YOUR SPEED.**
- Be certain all persons on board are wearing their PFD.

- Station a person forward as a lookout.
- Sound your horn or fog bell at the appropriate intervals to warn other vessels of your presence. Refer to the “*Rules of the Road*” for information concerning the proper duration and interval of the fog signal.
- Listen for fog signals from other vessels and be aware of their presence. If possible, determine their proximity to your yacht, but remember, sound carries a long distance over water and can be deceiving.
- If there is any doubt concerning the safety of continuing your excursion, anchor your yacht. Listen for other fog signals while continuing to sound your fog bell or horn. Continue your cruise when conditions improve.

FIRE

Fire aboard your yacht is always serious, but it can usually be brought under control if you are prepared and act quickly. Fire extinguishers required by the United States Coast Guard are the minimum necessary. Silverton recommends exceeding the minimum requirements by placing additional fire extinguishers where they may be needed. Inspect all fire extinguishing equipment frequently and review emergency plans on a regular basis.

As a yacht owner, you should develop a **Fire Response Plan** and familiarize all passengers with this plan before departing on your cruise. The Fire Response Plan will identify the type of fire you may encounter and the appropriate reaction to quickly extinguish it before it gets out of control. Having a Fire Response Plan in place and the assignment of certain re-

sponsibilities to your passengers will result in faster and more accurate decisions and reactions in the event of a fire aboard your yacht.

Important: All passengers on board your yacht should know the location of your fire extinguishers and be familiar with their use.

In the event a fire does start aboard your yacht, follow these guidelines:

- ✓ If you detect a fire or suspect a fire aboard your yacht, immediately turn OFF your engines and electrical power supply. DO NOT turn OFF power to your VHF radio.
- ✓ Be certain all persons on board put on their PFD.
- ✓ If the fire is in the engine/generator compartment, DO NOT open the hatch. The fire will flare with the sudden introduction of fresh air.
- ✓ If you are able to get to the source of the fire, aim your fire extinguisher at the base of the flames and use a sweeping action to extinguish it. Concentrating your fire extinguisher in one location may cause the fire to spread.
- ✓ If the fire becomes out of control, send a distress signal and call for assistance on your VHF radio. Be certain to provide any potential responders with your location and a description of your situation.

Deciding whether to stay on board your yacht or abandon ship may be difficult and depends on the extent of the fire and the weather conditions. If you decide to aban-

don ship, all persons on board should jump, not dive, overboard and swim a safe distance away from the burning yacht. Be certain all persons stay together after abandoning ship.

Be certain to read and have a thorough understanding of the Portable Fire Extinguisher System Section and the Automatic Fire Extinguisher System Section of this Owner's Manual. They contain valuable information and warnings for your safety.

Prevention is the safest and most effective method of fighting fire aboard your yacht. Always follow these guidelines:


- ✗ Use extreme caution and refrain from smoking while fueling your yacht.
- ✗ Use only marine safety approved cooking and heating systems and follow the manufacturer's directions concerning their operation.
- ✗ Open flames demand constant attention. DO NOT leave any open flame unattended.
- ✗ Ensure ventilation systems are unobstructed.
- ✗ Always provide adequate ventilation when cleaning and painting.
- ✗ Use extreme caution when using liquefied petroleum gas (LPG) or compressed natural gas (CNG). Close valves to cylinders and supply lines when not in use.
- ✗ Operate exhaust blower motors at least five (5) minutes before starting the engines or generator.
- ✗ Use your sense of smell to check for fumes in the bilge and engine/generator compartment before starting engines or generator.
- ✗ Always store flammable material in approved containers and in a locker sealed from the interior of your yacht and vented overboard.
- ✗ Remove the canvas enclosure, at least partially, before starting engines.
- ✗ Ensure there are no leaks in any fuel system, including LPG/CNG.
- ✗ Extinguish smoking materials carefully. Check cleaning materials for flammability and store as you would any flammable material.
- ✗ Always disconnect electrical power before performing any maintenance on electrical appliances.
- ✗ Always replace electrical breaker switches or fuses with the same recommended amperage. NEVER exceed the recommended amperage.
- ✗ Electrical service to your yacht should only be performed by a qualified marine electrical technician.

AIR CONDITIONING / HEATING SYSTEM(Optional)

The **Air Conditioning/Heating System** in your **43MY** is factory installed. The purpose of this system is to maintain a comfortable cabin temperature and humidity level, regardless of ambient temperature and humidity. Each air conditioning/heating unit in your **43MY**, which operates on the A/C electrical system, is self-contained and manufactured by *Marine Air Systems*. The three(3) **Air Conditioning/Heating System** units are described as follows:

42,000 BTU Total Capacity

This system utilizes three(3) self-contained air conditioning units. Two units have the capacity of 16,000 BTU's each, and one unit has the capacity of 10,000 BTU'S. The **Forward Unit** (16,000 BTU) is located under the bed in the forward stateroom. The **Mid Unit** (16,000 BTU) is located aft of the refrigerator, in the Salon area. The **Aft Unit** (10,000 BTU) is located under the Aft Stateroom bed.

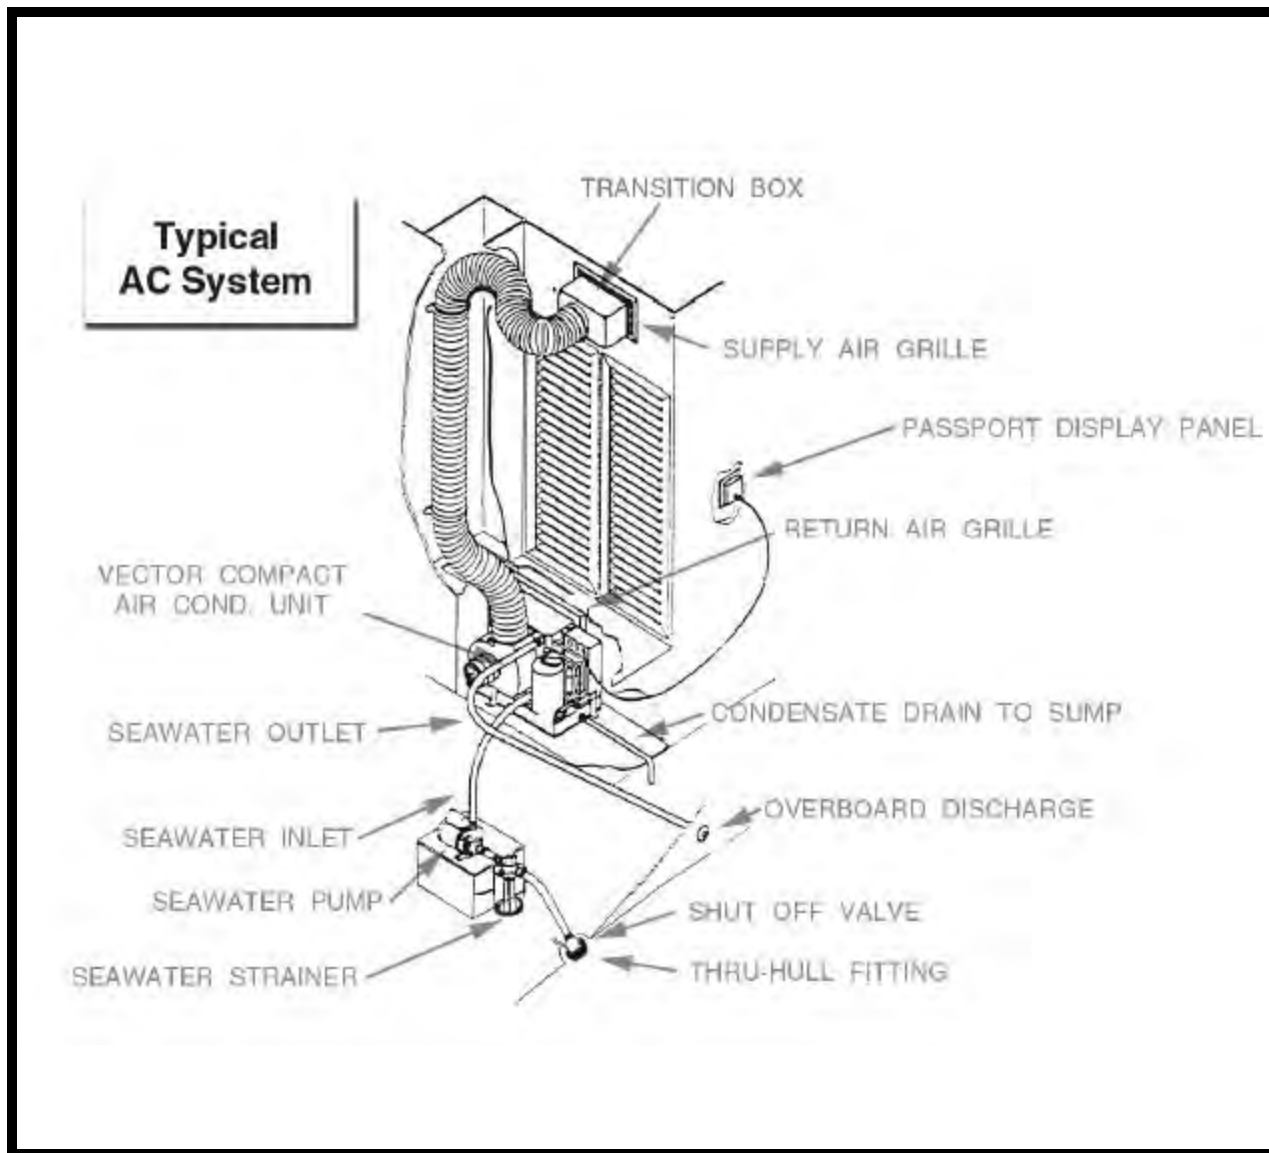

Each air conditioning unit is controlled by an independent thermostatic control panel ("Passport Control"), which is located within the respective cooling/heating zones. The desired zone temperature is manually set on the "Passport Control" and the air conditioning unit is activated to supply cooling or heating as required to constantly maintain the temperature selected. The photo below shows the control.



Each air conditioning unit will operate in a "**Dehumidification**" mode upon demand and is controlled by the "Passport Control". Refer to the *Marine Air Systems Operation and Maintenance Manual* for a complete description and instruction in the operation of this mode.

Operation of the **Air Conditioning/Heating System** in your **43MY** is as follows:

- ✓ Turn ON the respective air conditioner breaker switch, located on the AC/DC Electrical Panel (See **AC/DC Electrical Pages** in the **System Operations Section** of this owners manual).
- ✓ Make sure seawater intake is open and seawater pump is operating properly.

✓ Refer to the *Marine Air Systems Operation and Maintenance Manual* for a detailed description of the function of each button located on the "Passport Control".

✓ All Air Conditioning units create condensation, which creates water that has to be drained. All three units drain directly overboard. Refer to the Thru-Hull Schematics in the Schematics Section of this Owners Manual for location of each discharge.

✓ Turn ON the power button, located on the respective air conditioning unit "Passport Control".

✓ Press the fan speed button on the "Passport Control" until the desired speed is obtained.

✓ Press the appropriate temperature control button (Down/Up) to obtain the desired temperature.

Only certified and trained service technicians should perform maintenance of your **Air Conditioning/Heating System**. Contact your Silverton dealer for general maintenance and winterization of the system on your **43MY**. Untrained persons may carefully perform routine maintenance, such as the cleaning of filters and the exterior surfaces of the condensing coils.

REFER TO THE MARINE AIR SYSTEMS OPERATION AND MAINTENANCE MANUAL FOR TECHNICAL INFORMATION CONCERNING YOUR AIR CONDITIONING / HEATING SYSTEM.

ANCHOR SYSTEM

The purpose of the **Anchor System** is to make fast your yacht to the ground surface below the water level. You may want to anchor your yacht for a variety of reasons, such as an overnight stay in a harbor, stationary fishing or, if your yacht becomes disabled, to remain in one identifiable location until assistance arrives. The equipment used in anchoring your yacht, also known as “ground tackle”, is as follows:

- Anchor
- Anchor Chain or Line (Rode)
- Anchor Chock
- Anchor Cleat
- Anchor Safety Chain
- Anchor Windlass (Optional)
- Rope Locker

Anchor

Your **43MY** is equipped with a plow type anchor, weighing 34.7 pounds. This universal type of anchor is very efficient for a variety of bottom terrain. This is not a storm anchor. Please refer to *Chapman's* for the recommended need for a storm anchor.



Anchor Chain or Line (Rode)

The Anchor Rode on your **43MY** may be chain, rope or a combination of both and, depending on the option you selected when you purchased your yacht from your Silverton dealer, the length is as follows:

Standard Equipment: Three hundred(300) feet of nylon rope, 9/16 inch in diameter.

Optional Windlass Equipped(Standard): Fifteen(15) feet of chain coupled to one hundred fifty(150) feet of nylon rope, 9/16 inch in diameter.

Optional Windlass Equipped(Optional): Three hundred(300) feet of chain.

Anchor Chock

The Anchor Chock on your **43MY** is located on the underside of the bow pulpit. The Anchor is pulled into the chocks on the pulpit, to steady the anchor.



Anchor Cleat

Your **43MY** is equipped with an Anchor Cleat and its purpose is to hold the rope that secures the anchor, after the anchor is set. If your **43MY** is equipped with the optional Windlass Anchor Winch, the cleat will help relieve constant pressure on the winch. Once the proper scope is determined, the cleat keeps the rope at a

constant length. The Anchor Cleat is located in the Anchor Hatch. The photo below shows the cleat next to opening to the rope locker.



Anchor Windlass (Optional)

Your **43MY** may be equipped with an optional power Anchor Windlass, which is located under the Anchor Hatch. The purpose of the Anchor Windlass is to assist in lowering and raising the anchor with a minimum of manual effort. The Anchor Windlass operates on DC electrical power and may be operated from either the helm station or foot controls, which are located on the bow pulpit. Be certain the Anchor Windlass breaker switch which is located in the engine room, and the battery switch which is located below the ACDC Panel in the Salon, is turned to the ON position. The helm station control consists of a manual rocker-type switch, located on the helm switch panel (refer to the Electrical Pages of this section of this Owners Manual for the location of the switch). The foot controls, located adjacent to the Anchor Windlass, consist of two (2) foot depressed switches: the RED switch lowers the anchor; the GRAY switch raises the anchor (See photograph below, which illustrates the location of the **Anchor Windlass**, the foot depressed control

switches, the **Anchor Cleat** and the **Rope Locker**).



Rope Locker

Your **43MY** is equipped with a Rope Locker, which is located on the Starboard side of the Anchor Hatch. The purpose of the Rope Locker is to store the anchor rode in a convenient location removed from the deck surface. The Rope Locker is accessed by a hatch, which covers the locker and prevents you or your passengers from accidental falls into the storage well (See previous photograph, which illustrates the location of the **Rope Locker**). This Rope Locker has a drain in the bottom. It is recommended that you wash off the salt water with fresh water after use of your anchor and rope.

Scope

Scope is defined as the ratio of the length of the anchor rode to the vertical distance from the anchor chock to the bottom surface (water depth plus the height of the anchor chock above the water). Under favorable current, tidal and weather conditions, a Scope ratio of 8:1 is considered satisfactory. If the rode is chain, the ratio may decrease to 5:1 under the same favorable conditions. It may be necessary to increase the scope ratio under unfavor-

able weather conditions, such as severe wind and tidal currents, to hold your yacht fast to the bottom. Scope ratio is very important. Please refer to your Chapman's book for all details on anchor rode.

ANCHOR SAFETY CHAIN

Attached to the anchor chain is a safety chain. This safety chain must be released before you can use your anchor. This safety chain must be released manually. This safety chain will ensure that the anchor is not released when not being used.



PROPER ANCHORING TECHNIQUE

Proper anchoring techniques are required for safe anchoring of your boat. Please refer to Chapman's book for complete instructions for anchoring your boat.

BATTERY SYSTEM

ENGINE BANK

The 29 series batteries mounted in front of each engine are wired in parallel. Depending on the engine cranking requirements the amount of batteries wired in parallel will change.

The 29 Series batteries are for engine cranking only. This system is separate from the house bank. The generator starts off the starboard engine battery bank.

The engine battery banks are charged thru the alternators of the engines and generator. The battery switches for the engines are located on the bulkhead forward of the engines. The port & starboard engine battery banks may be paralleled thru the parallel start switch at the helm.



The photo above shows the portside engine bank of batteries, with the portside house battery on the outboard side. Notice the battery switch for the port engine forward of the engine bank.

HOUSE BANK

The house bank of batteries consists of

two(2) 4D batteries (one battery for the port side of the AC/DC Panel and one for the starboard side of the AC/DC Panel). The 4D deep cycle batteries are mounted outboard of the engine cranking batteries.

The house batteries are charged thru the converter, The battery switches for the house batteries are located below the AC/DC Panel.

BILGE PUMP SYSTEM

The purpose of the **Bilge Pump System** is to remove any water that may accumulate within the bilge area of your yacht. Although a small amount of water in the bilge area is expected, the water should never be above the bilge switch. If it is it means the switch is not working correctly. Make sure they are not turned off. If the problem continues, please contact a service technician to solve the problem. The bilge area is defined as the interior area of the hull below the designed waterline. Your **43MY** is equipped with three(3) bilge pumps that are capable of pumping 1050 gallons of water per hour. The bilge water is pumped directly overboard.



Normal operation of the bilge pumps is automatic. Each bilge pump is equipped with a float-type switch that will automatically activate the pump when the bilge water reaches a certain level. The automatic switches are connected directly to the batteries and will operate even if the battery switch is turned OFF. Each of the bilge pumps can also be activated manually by individual switches located on the AC/DC Electrical Panel(See the **Electrical Pages** in this section of your **Owners Manual** for the location of the **Bilge Pump Switches**). The bilge pump will operate continuously until the manual switch is

turned OFF. The battery switch must be turned ON to operate the bilge pumps manually.

Periodic maintenance of the bilge pumps should consist of the following:

Visually inspect each bilge pump for any debris that may have accumulated. Remove any debris noted.

Manually test each bilge pump by activating the manual switches located on the AC/DC Electrical Panel. Listen to each bilge pump as it is manually activated. They should emit a quiet “whirring” sound. If any abnormal sounds are noted, contact your Silverton dealer for further inspection and replacement, if necessary.

IMPORTANT: After testing each bilge pump by turning ON the manual switches, be certain they are turned OFF. The constant operation of the bilge pumps will eventually discharge the batteries.

While underway the aft bilge pump should be used. While docked, the midships bilge pump should be used.

Location of the bilge pumps is as follows:

- FORWARD and MIDDLE PUMP** - Both pumps are in the forward section of the engine room.

- AFT PUMP** - The aft pump is located at the very aft part of the hull, and the pump is accessed by removing the Aft State-room aft bulkhead.

The breaker switch for the Bilge Pumps are located on the Ship Service Box.

BILGE VENTILATION SYSTEM

! WARNING

The engine and generator compartments on your 43MY are enclosed areas and are subject to the accumulation of dangerous fuel fumes. If these fumes are not ventilated or properly exhausted from the engine/generator compartment, they may be ignited, resulting in fire or explosion and possible injury or death.

Your **43MY** is equipped with intake vents for the engine room. These vents are located on the port and starboard side of your **43MY**. The purpose of these vents is to ventilate the engine room area of your **43MY**. The photo below shows the vent on the port side of your **43MY**.



For quicker evacuation of air from the engine room, your **43MY** is equipped with two(2) bilge blowers. The blowers are located in the engine compartment and exhaust out through the hull on the port and starboard sides of your **43MY**. The photo below shows the blower exhaust on the port side of your **43MY**.



Operation of the bilge blowers is as follows:

- ✓ The battery switch must be turned to the ON position. The Battery Switches are located under the AC/DC Panel in the Salon Area.
- ✓ The bridge electrical breaker switch at the ships shore service panel must be turned ON.
- ✓ Depress the blower motor switch, located on the helm switch panel. The switch location is shown in the Electrical Pages of this section of your Owners Manual. The small light located on the blower switch will illuminate to indicate the blower motors are in operation. The blowers can also be turned on at the AC/DC Panel. The Electrical Pages of this section of this Owners Manual shows the location of the switch on the AC/DC Panel. There is also a Schematic of the AC/DC Panel in the Schematics Section of this Owners manual.

WARNING

To reduce the risk of fire or explosion within the engine/generator compartments of your 43MY, the bilge blower motors should **ALWAYS** be operated under the following conditions:

- ✓ Operate the blower motors for a minimum of five (5) minutes prior to starting the engines or generator.
- ✓ Operate the blower motors continuously while your yacht is traveling less than cruising speed.

The photo below shows the blower unit attached to the exhaust hose.



Located right next to the blower is the fuse for the blower.

BONDING SYSTEM

The purpose of the **Bonding System** is to protect your yacht's underwater components from electrolysis and galvanic corrosion. Examples of underwater components would be the propellers, propeller shafts, rudders, engine/generator and seawater intake valves.

Electrolysis and galvanic corrosion occurs primarily in salt water, but can occur to a lesser degree in fresh water. Salt water allows electric current to flow from anodic to cathodic material. Any two metals from two components and their relative positions in the galvanic rating table will determine which metal loses material(anode) and which metal remains largely undisturbed(cathode). The distance apart on the galvanic table of the two metals determines the rate of wear. To help prevent corrosion, sacrificial zinc anodes are fitted to the underwater components of your yacht, such as the propeller shafts and rudders.



A large sacrificial zinc anode plate is also attached to the underwater area of the transom.



The anodes on the rudder, shaft and trim tabs are installed by your Silverton Dealer. The purpose of these sacrificial zinc anodes is to attract any destructive electrical currents away from the metallic underwater components, thereby preventing their eventual corrosion and allowing the corrosion of the sacrificial zinc anodes. The sacrificial zinc anodes are considerably easier and cheaper to replace and their deterioration will not affect the performance of your yacht, as would the deterioration of a propeller or rudder.

The Bonding System is a network of wires (color coded green) that are connected to all metallic underwater components within the interior of the hull, which makes them one unit for electrical current purposes. This network of wires is then attached to the sacrificial zinc anode located on the transom, which allows corrosion of the anode, but prevents corrosion of the underwater components.

General maintenance of the Bonding System consists of yearly replacement of the sacrificial zinc anode located on the transom and all other zinc anodes located on the propeller shafts, rudders, etc. and

should be completed during the spring launch procedure. The anodes may require more frequent replacement, depending on your docking location and the length of your boating season. If possible, check the anodes for excessive corrosion midway through your boating season. If excessive corrosion is noted, have your dealer or a competent technician replace the sacrificial zinc anodes. Periodically check the wiring connections to make sure they are tight and free of corrosion. Tighten and clean connections as necessary.

NOTE: Silverton recommends placing sacrificial zinc anodes on the following components:

- Propeller shafts
- Rudders
- Trim Tabs

IMPORTANT: DO NOT paint any of the sacrificial zinc anodes as it will retard the flow of electric current through them and render them ineffective.

CARBON MONOXIDE (CO) DETECTOR SYSTEM



Carbon Monoxide Gas (CO) is colorless, odorless and tasteless. It is highly poisonous, endangering lives even at very low levels of concentration. Mild exposure causes headaches and fatigue, often resembling “flu-like” symptoms. Medium exposure causes severe headaches, drowsiness, nausea and rapid heart rate. Extreme exposure results in unconsciousness, convulsions, cardiorespiratory failure and death. If Carbon Monoxide Gas (CO) is detected in your yacht, immediately contact a qualified technician to locate and repair the source of the poisonous gas. **DO NOT** enter your yacht until repairs have been made and the Carbon Monoxide Gas (CO) is lowered to an acceptable level. Refer to the Carbon Monoxide Safety pages in the Boating Safety section of this Owners Manual.

Your **43MY** is equipped with three(3) **SAFE-T-ALERT** Carbon Monoxide Gas (CO) detector monitors, which are located within the interior as follows:

•Forward Stateroom



•Salon



•Aft Stateroom



Each CO monitor is operated by DC electrical power and they are connected directly to the batteries. It is not necessary for the battery switch to be turned ON for them to operate. The fuses for the monitors are located behind the AC/DC Panel.



Operation of the CO monitors requires a ten (10) minute warm-up period, during which time, the sensor element is cleaned and the unit is stabilized. During this ten minute warm-up period, the GREEN indicator light will flash ON and OFF. The GREEN indicator light will remain ON after the completion of the warm-up period until the presence of Carbon Monoxide Gas is detected. If the GREEN indicator light does not illuminate, check all wiring con-

nections and clean and tighten, if necessary. If the GREEN indicator light still fails to illuminate, contact your Silverton dealer for inspection and replacement. DO NOT attempt to make any repairs to the unit(s) yourself.

When Carbon Monoxide Gas is detected by the CO monitor, the following visual and audible signals will appear:

Low CO Warning

YELLOW flashing indicator light accompanied by a "BEEP" sound every five (5) minutes. The YELLOW indicator light will continue to flash until the presence of CO has lowered to an acceptable level. If the CO level has not been lowered to an acceptable level, an alarm will sound in approximately fifteen(15) minutes. Contact a qualified technician to locate and repair the source of the Carbon Monoxide Gas and DO NOT enter your yacht until repairs have been made and the CO has been brought to an acceptable level.

CO Alarm

RED flashing indicator light accompanied by a pulsed alarm sound. This indicates the presence of a dangerous level of Carbon Monoxide Gas and **IMMEDIATE ACTION IS REQUIRED.**

Contact a qualified technician to locate and repair the source of the Carbon Monoxide Gas and DO NOT enter your yacht until repairs have been made and the CO has been brought to an acceptable level. After depressing the "Reset" switch, the RED indicator light will continue to flash and the alarm will produce a "BEEP" sound every thirty (30) seconds until the CO is lowered to the **Low CO Warning** level. If the CO is not lowered to this level, the pulsed alarm will resound in approximately six (6) minutes. The **Low CO Warning** alarm will activate if the Carbon Monoxide Gas is lowered to the low concentration level.

CO Monitor Malfunction

Indicator light flashes alternating RED/ GREEN accompanied by a "BEEP" sound every fifteen (15) seconds. Depressing the "Test/Reset" switch will not discontinue the visual and audio signal. See your Silverton dealer for inspection and replacement of the unit(s), if necessary.

Maintenance of your CO monitors is as follows:

- ✓ Test each monitor after removing your yacht from storage, prior to departing on each cruise and on a weekly basis. Refer to the *SAFE-T-ALERT* User's Manual included with your owner's packet for the proper test procedure.
- ✓ Frequently observe the color of the indicator light on each CO monitor and during testing to be certain the light is functioning properly.
- ✓ Vacuum the dust off the CO monitor cover with the brush attachment of your vacuum cleaner at least once a year and more frequently if your yacht is maintained in a dusty climate.
- ✓ Frequently clean the CO monitor cover with a damp cloth to remove all dirt and grease that may accumulate. Dry with a soft, dry cloth.
- ✓ DO NOT spray cleaning agents or waxes directly onto the CO monitor cover.

Refer to the Safety Pages of this Owners Manual for more important information on CO Safety.

REFER TO THE *SAFE-T-ALERT* USER'S MANUAL FOR ADDITIONAL TECHNICAL INFORMATION CONCERNING THE USE AND MAINTENANCE OF YOUR CO MONITORS.

ELECTRICAL SYSTEM

This section describes the various components of the Electrical System on your **43MY**. Also included is a Troubleshooting Guide for your convenience.

AC/DC PANEL

The AC/DC Panel is where all the controls for the electrical system are located. The panel is broken down into three main sections. The top part of the panel, labeled 12 Volt DC Controls, is the controls for the electrical system when it runs on batteries. The lower part of the panel, labeled 240 Volt AC Controls, is the controls for when the electrical system runs on AC.

DC ELECTRICAL SYSTEM

The DC Electrical System obtains its source of power from the batteries, located in the engine compartment. The negative terminal of each battery is attached to a grounding stud on each engine. This is known as a “negative ground system” and is the approved system for marine DC electrical systems. The battery wiring system has two color-coded wires. The yellow wire is the ground(negative) wire and the red wire is the positive(“hot”) wire. Both batteries are connected to a battery switch(See photograph below).



The positions on the battery switch are ON and OFF. The switch must be turned to the ON position to supply power to the DC electrical system. When the battery switch is turned to the OFF position, power is disconnected to the DC electrical system.

NOTE: The bilge pumps, carbon monoxide detectors and radio memory are NOT disconnected from their power source when the battery switch is turned to the OFF position. These accessories are connected directly to the battery and do not require a switch for operation.


Battery Charging System

The batteries maintain their charge from alternators, which are located on each engine. The alternators supply charging power to the batteries only while the engines are running. Your **43MY** also has a converter, located in the bilge, which converts 120 volt AC electrical power from either the generator or shore power into 12 Volt DC electrical power.

Activating the DC POWER SYSTEM

There are three sets of switches that must be in the “ON” position to activate the DC Power to your **43MY**. One set of switches is on the ship service box down in the engine room. These switches are normally in the “ON” position. The second set of switches would be the battery switches, located under the AC/DC Panel in the Salon Area. The third set would be on the AC/DC Panel. On the top portion of the AC/DC Panel are two rows of switches. The very top switches on the top of each row are the Main Battery Switches. Each switch controls that row of switches below it. To supply power to one of the switches listed on the left side of the panel the top switch on the left hand side must be on.

The photo below shows the top of the AC/DC Panel. Notice the two columns of switches.

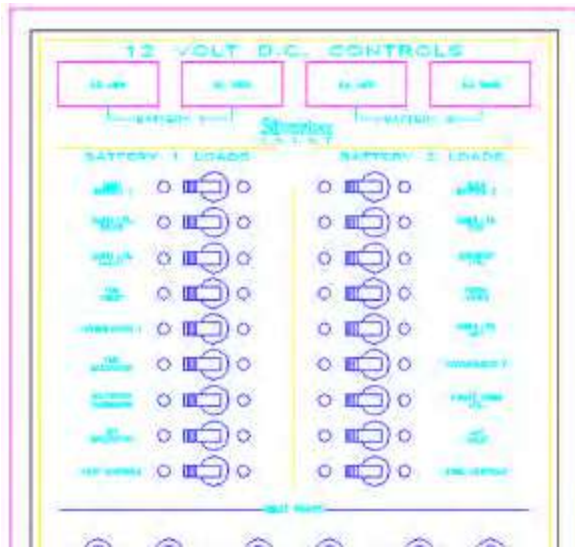

There are four meters across the top of the panel. They are (from left to right):

DC Amperage Meter for Battery #1 - Displays the amperage draw on Battery #1.

DC Volt Meter for Battery #1 - Displays the Voltage draw on Battery #1.

DC Amperage Meter for Battery #2 - Displays the amperage draw on Battery #2.

DC Volt Meter for Battery #2 - Displays the Voltage Draw on Battery #2.

Below the meters are two columns of switches. The left hand side are all the switches connected to battery #1. The right hand side are all the switches connected to Battery #2.

The switches for the left column (BATTERY #1) are (from top to bottom):

- DC Main #1: Supplies 12 Volt Power from Battery #1 to all breaker switches directly

under this switch.

-Cabin Lights Salon: Supplies power to the cabin lights in the salon and galley.

-Cabin Lights Galley: Supplies power to the cabin lights in the galley.

-Forward Toilet: Supplies power to the forward toilet.

-Refrigerator 1: Supplies DC power to the refrigerator.

-Fwd Macerator: Supplies power to the forward Macerator pump.

-Court Lights Aft: Supplies the power to the courtesy Lights in the Aft Stateroom.

-Aft Macerator: Supplies power to the aft Macerator pump.

-Port Controls: Supplies power to additional accessories.

The switches for the right column (Battery #2) are (from top to bottom):

-DC Main #2: Supplies 12 Volt DC power from Battery #2 to all breaker switches directly under it.

-Cabin Lights Forward: Supplies power to the cabin lights in the forward stateroom and forward head.

-Courtesy Lights: Supplies Power to all courtesy lights throughout the yacht.

-Fresh Water: Supplies power to the fresh water pump.

-Cabin Lights Aft: Supplies power to the aft stateroom main lights.


-Refrigerator #2: Supplies DC Power to the refrigerator.

-Engine Room Lights: Supplies power to the Engine Room Lights.

-Aft Toilet: Supplies Power to the aft toilet.

-Stbd Controls: Supplies power to additional accessories.

Below the DC Volt section of the AC/DC Panel is the Bilge Pump section of the AC/DC Panel. There are three(3) sets of breakers and switches. Each bilge pump (forward, mid, and aft) has a breaker switch and an ON/OFF Switch. Although the bilge pumps always have power to them, to operate the bilge pumps manually, you must have the battery switches "ON".

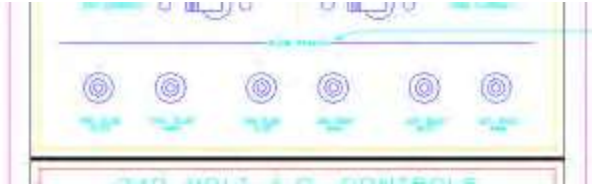

BREAKER SWITCHES: The breaker switches are your safety switches. They work just like a fuse, but are resetable. If the breaker switch is activated, before resetting the switch, locate the problem. The breaker is reset by pushing in the white button.

MANUAL SWITCH: This is the "ON/OFF" Switch



Fuel fumes in the engine compartment can explode. Before working on any electrical wiring, ventilate the engine compartment and disconnect the batteries to prevent sparking.



NEVER reset a breaker switch which has tripped automatically without first locating and correcting the problem. The electrical system and devices may be damaged.




Alterations or extensions to the electrical system can cause electrical shock or fire. ONLY competent marine electricians should make system changes according to U.S. Coast Guard regulations.

240 VOLT AC ELECTRICAL DISTRIBUTION PANEL

The AC electrical system is a three-wire grounded system powered by either the generator (if so equipped) or shore power. There is a "ground fault interruption circuit" (GFIC) that protects all outlets. This system prevents accidental electrical shock. If power is lost to an outlet, reset the breaker switch at the GFIC outlet.

If you are unable to reset the GFIC breaker switch, contact your Silverton dealer or a competent marine electrician for inspection and repair. Failure to do so may result in a fire or damage to the electrical system.

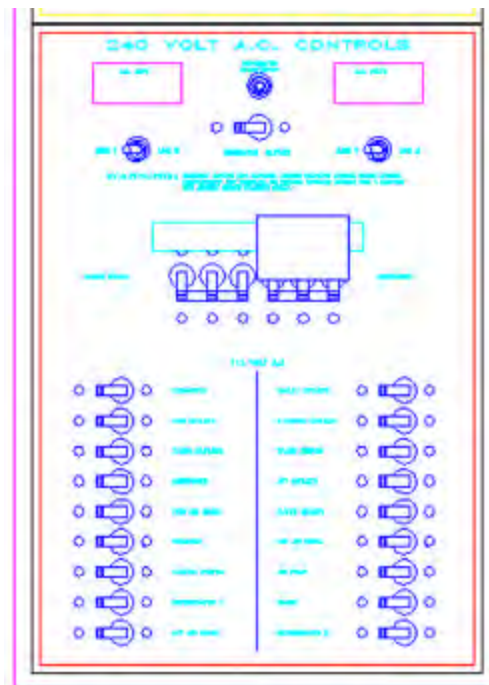

The AC electrical system is supplied with 240 volts of power upon entry to the main electrical distribution panel, which then is separated into two (2) legs of 120 volts each.

115 Volt Switches

The following breaker switches and their function are described below in the order in which they appear on the main electrical distribution panel:

AC Amperage Gauge and Switch: The gauge displays the amperage draw on the AC circuit. The gauge reads the amperage, and the switch below it selects which line the gauge will display. Line 1 is the power and switches on the left side of the AC Portion of the AC/DC Panel and Line 2 controls the power and switches on the right side of the AC portion of the AC/DC Panel.

AC Volt Gauge and Switch: The gauge displays the voltage draw on the AC circuit. The gauge reads the voltage, and the switch below it selects the line the gauge will display. Line 1 is the power and the switches on the left side of the AC portion of the AC/DC Panel and Line 2 is the power and switches on the right hand side of the AC Portion of the AC/DC Panel.

Generator Blower and Start/Stop


Switch: This is the "ON/OFF" switch for the generator. The generator is an option that was available with your 43MY. Below the "ON/OFF" switch is the Generator Blower Switch.



The blower must be run for four(4) minutes before starting the generator.

SHORE POWER / GENERATOR SWITCH:

This switch selects where you will be getting your AC Power from. The slide bar is there to make sure you only select one source at any one time. In order for the three(3) generator switches to be on, the slide bar has to move over to block the three(3) Shore Power Switches from being on. In order for the Three(3) Shore Power switches to be on, the Slide Bar must move over to block the three(3) Generator Switches from being on.

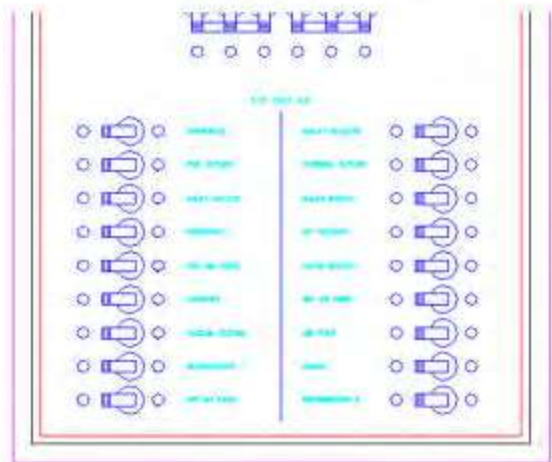

Converter: Supplies power to the converter, which converts DC power to AC power.

Galley Outlets: Supplies power to the outlets in the Galley.

Forward Outlets: Supplies power to the outlets in the forward cabin and forward head.

Exterior Outlets: Supplies power to the outlets found on the exterior area of the yacht.

Salon Outlets: Supplies power to the outlets in the Salon.

Salon Stereo: Supplies power to the Salon Stereo System.

Microwave: Supplies power to the microwave oven outlet.

Aft Outlets: Supplies power to the Outlets in the Aft Stateroom.

Forward Air Conditioner: Supplies power to the forward air conditioner. Air pump must be "ON" before unit is turned "ON".

Water Heater: Supplies power to the water heater.

CAUTION

Be certain the water heater is full of water and does not contain air. If the water heater is not full of water, damage to the heating elements may result when electrical power is turned ON to the unit.

Icemaker: Supplies power to the icemaker unit.

Mid Air Conditioner: Supplies power to the mid air conditioner (if equipped with the optional 42,000 BTU system).

Vacuum System: Supplies power to the optional central vacuum cleaner system.

Air Pump: Supplies power to the air conditioner raw water pump.

Refrigerator 1: Supplies power to the refrigerator in the Galley.

Range: Supplies power to the stove/oven combination.

Aft Air Conditioner: Supplies power to the Aft Stateroom Air Conditioner.

Spare: Supplies power to additional AC accessories.

Shore Power

Follow the procedures below to connect shore power to your yacht:

- Turn OFF all 115 volt circuit breakers at the AC portion of the AC/DC Panel. Shut down the generator if it is in operation.

WARNING

Using a damaged or improper cord for shore power connection can cause electrical shock and serious personal injury. Use a cord specifically designed for shore power connection. **DO NOT** use a household extension cord.

- Connect the female end of the shore power cord to the yacht's inlet receptacle. Be certain the lock ring is tightly secured. If there is a cord already supplied at the dock, be sure to unhook the cord from the dockside outlet.

WARNING

DO NOT connect the shore power cord to the dockside electrical source first. You can accidentally drop the cord into the water which may result in electrical shock and serious personal injury.

- Connect the Shore Power Cable to power supply. When connecting the shore power cable to the dockside outlet, be certain the cable has sufficient slack to prevent stretching during tidal changes.
- Slide the SHORE POWER/GENERATOR slide bar over on top of the generator side of the switch. With the slide over, turn on the shore power switch. The shore power side of the distribution panel should now be operable.

If there is no power to the electrical distribution panel, check the following:

- Breaker switch at dockside power supply.
- Main breaker switch on shore power side of distribution panel.

Follow the procedures below to **disconnect** shore power from your yacht:

- Turn OFF all 115 volt circuit breakers on the main distribution panel.
- Turn OFF the dockside circuit breaker switch.
- Disconnect the shore power cord from the dockside outlet.
- Disconnect the shore power cord from the yacht's inlet receptacle.
- Store your shore power cable in a safe, dry location.

STARTING THE GENERATOR

- Turn on the generator blowers.



The blower must be run for four(4) minutes before starting the generator.

- Start the generator (Refer to "Starting Instructions" section in the Generator Manual included with your owner's packet). Be sure that it is operating properly.
- Turn off all 115 VAC breakers.
- Turn off the shore power switch on the Shore Power/Generator switch.
- Slide the slide bar over on top of the Shore Power Switches. With the slide bar over, you should be able to switch "ON" the generator switches.



Fuel fumes in the engine compartment can explode. Before working on any electrical wiring, ventilate the engine compartment and disconnect the batteries to prevent sparking.



NEVER reset a breaker switch which has tripped automatically without first locating and correcting the problem. The electrical system and devices may be damaged.

CAUTION

Alterations or extensions to the electrical system can cause electrical shock or fire. **ONLY** competent marine electricians should make system changes according to U.S. Coast Guard regulations.

FUSE BOXES

If you open the AC/DC Panel, located in the upper right portion of the electrical cabinet is two fuse units.

CAUTION

Turn off all electric power to your AC/DC Panel when opening the door to the electrical cabinet. The power can be turned off by the two main DC switches at the top of the panel, and the main AC switch in the lower portion of the Panel. Make sure the Genset is OFF and the dockside cord is unplugged.

The photo below shows the two fuse units.



In the Upper Fuse Unit we have (from top to bottom):

Left hand side -
CO Monitor(forward)
CO Monitor(salon)
CO Monitor(aft)
Waste Monitor Forward
Water Monitor
Waste Monitor Aft
Locker Lights Forward

Right hand side:

Galley Exhaust
Head Exhaust
Aft Head Exhaust
Shower Exhaust
Aft Shower Exhaust
Shower Sump

In the lower fuse unit (from top to bottom):

On the left side-
Locker Lights Aft
Oil Changer
Shore Retrieve
Stereo Memory Forward
Stereo Memory Aft
12V DC Outlet

On the right side-
Amplified Antenna
Amplified Antenna
Panel Lights
12 Volt DC Stereo Forward
12 Volt DC Stereo Aft
LCD TV 12V DC

There is also the following breakers on the Ship Service Box in the Engine Room:
Port and Starboard DC Main, Auto Bilge, Converter, Bridge Electrical, and Helm Accessories.

The Engine Room also has the following Breakers or Fuses:

WINDLASS BREAKER - Located by the batteries.

BLOWER FUSES - Located right by the Blower Motors.

BOW THRUSTER FUSE - Located by the Batteries.

GENERATOR OUTPUT BREAKER - Located on the Generator.

HELM ELECTRICAL SWITCHES

In addition to the switches on the AC/DC Panel, there are also switches at the helm. These switches are 12 Volt Switches. These switches will be described in order (from left to right).

Trim Tab Buttons (first two buttons) - Controls the port and starboard trim tabs. Gives the trim tabs up and down motion.

Anchor/Nav Lights - This switch is a three position switch. The three positions are OFF, Navigation Lights, and Anchor Lights.

HORN (red) - This is a push button switch. To activate the horn press the top of the switch.

PARALLEL - When starting your engines you need increased amperage to your engine. This switch will parallel the batteries to achieve this.

COURTESY LIGHTS - This switch controls the courtesy lights on the bridge.

BLOWER - This switch controls the blowers in the engine Room.

PANEL LIGHTS - This switch controls the panel lights at the helm.

ACCESSORY - This is an extra switch for any option that has been added.

ACCESSORY - This is an extra switch for any option that has been added.

ACCESSORY - This is an extra switch for any option that has been added.

ACCESSORY - This is an extra switch for any option that has been added.

Electrical Accessories

You may have purchased optional electronic accessories, such as a VHF radio, GPS system, or autohelm system, with your **43MY**. These units are controlled by the switches marked ACC. located on the helm switch panel. These accessories are powered through the electrical panel. The switches used to control them are marked "SPARE".



REFER TO THE INDIVIDUAL ELECTRONIC EQUIPMENT MANUALS INCLUDED WITH YOUR OWNER'S PACKET FOR SPECIFIC INFORMATION ON THE OPERATION OF YOUR ELECTRONIC ACCESSORIES.

TROUBLESHOOTING GUIDE

DC ELECTRICAL SYSTEM

PROBLEM	CAUSE	SOLUTION
12 Volt DC equipment not operating	Battery Selector switch turned OFF.	Check Battery Selector Switches to ensure they are turned ON.
	Main breaker at DC Control center OFF.	Switch Breaker to ON.
	Weak or Dead Battery.	Change Battery selector switch position; recharge battery.
	Main Breaker at battery switch has been tripped.	Reset Breaker.
Battery not charging(engine running)	Engine Alternator Belt Loose.	Tighten Belt.
Battery not holding a charge	Defective Battery.	Replace Battery.
12 Volt Device not working	Circuit Breaker for device is OFF.	Switch Breaker to ON.
	Weak or Dead Battery.	Change Battery selector switch position; Recharge Battery.
	Faulty Electrical Connection.	Check 12 volt DC Connections. Tighten or repair as needed.
Cabin Lights not working(off or dim)	CABIN LIGHTS breaker OFF.	Switch breaker to ON.
	Weak or Dead Battery.	Recharge or replace battery.
	Light Bulb burned out.	Replace bulb.

TROUBLESHOOTING GUIDE

AC ELECTRICAL SYSTEM

PROBLEM	CAUSE	SOLUTION
No 120 Volt Power	Main breaker(s) in engine compartment tripped or OFF on generator.	Turn breakers ON or reset.
	Breaker(s) at AC Control Center tripped or OFF.	Turn breakers ON or reset.
	Shore power breaker tripped.	Turn Breakers ON or reset.
	Shore power cord not connected.	Check cord; plug in, if necessary.
	Loose or disconnected wire.	Tighten connections. See your dealer.
No power to 120 volt devices.	Breaker(s) at AC Control Center tripped or OFF.	Turn breakers ON or reset.
	Shore power cord not connected.	Check cord; plug in, if necessary.
	Loose or disconnected wire.	Tighten connections. See your dealer.
Inadequate power to 120 volt devices (generator running)	Electrical demand greater than generator output.	Switch OFF devices and equipment not needed.
		Increase generator RPM. Refer Generator Manual.
		Use shore power AC line, if available.

TROUBLESHOOTING GUIDE

AC ELECTRICAL SYSTEM

[illegible]

ENTERTAINMENT SYSTEM

Reciever and CD Player - Standard

Your **43MY** is equipped with a JVC Reciever and a 5 disc CD player. The two units are shown below. The units are installed in the Salon.



Television - Optional

Available as an option is the 27" TV and VCR unit that can be installed in the Salon.



HELM CD/RADIO - Standard

The Helm CD/Radio Combination is standard equipment on you 43MY. The unit is shown below.



Television Stateroom - Optional

Also available as an option is the 13" TV/ VCR combination unit. This unit is designed to be installed in the Forward Stateroom. The unit is shown below.



Television - Aft Stateroom - Optional

The drop-down Television is available for the Aft Stateroom. The photo below shows the Unit.



This option comes with a VCR, which gets put in the closet by the Entry. The photo below shows the unit.



Surround Sound - Optional

Surround sound is also available for the Salon.

AUTOMATIC FIRE EXTINGUISHER SYSTEM

Your **43MY** is equipped with an **Automatic Fire Extinguisher System**, which is permanently mounted on the forward bulkhead of the engine compartment.



The **Automatic Fire Extinguisher System (AFE)** is designed for use in enclosed compartments that are not normally occupied by passengers and are not normally subject to weather or water exposure. The automatic fire extinguisher is designed to extinguish Class B fires (flammable liquids) and Class C fires (electrical), which would be the type that would normally occur within the confined area of the engine/generator compartment.

NOTE: The automatic fire extinguisher system DOES NOT replace the need for additional portable-type fire extinguishers required by the United States Coast Guard.

The automatic fire extinguisher is activated when the engine/generator compartment reaches 165° Fahrenheit/74° Celsius. The system releases HALON 1301 into the compartment, which immediately converts to a safe, odorless and electrically nonconductive vapor that will not harm the components in the engine/generator compartment. In contrast to other fire extinguishing materials, HALON

1301 leaves no residue, assisting in the eventual cleaning of the compartment.

The automatic fire extinguishing system on your **43MY** is equipped with a GREEN indicator light, located on the helm switch panel.



The purpose of this indicator light is to alert the operator of the charge/discharge status of the **Automatic Fire Extinguishing System**. The indicator light will illuminate when the ignition switch is turned to the ON position if the system is fully charged. If the indicator light fails to illuminate after turning on the ignition switch, carefully examine the exterior of the engine/generator compartment for evidence of a fire that may have discharged the system by looking for signs of “scorching” and by your sense of smell.



If the Green indicator light does not illuminate after turning on the ignition switch or if it turns off at any time during operation of your yacht, either at dockside or while underway, DO NOT open the engine compartment for at least ten(10) minutes. Opening the engine compartment immediately will allow air to enter and may cause a fire “flashback”, possibly resulting in serious injury or death. The sudden rush of air into the engine compartment may also render the automatic fire extinguishing system ineffective.

If you do not observe or smell any evidence of a fire and you have waited the recommended ten(10) minutes, open your engine compartment and examine the Halon 1301 container actuator to determine if it has been discharged. Refer to the *Manufacturer's Manual*, which illustrates the charged and discharged positions of the actuator. If the system has been discharged or appears charged, but the indicator light does not illuminate, see your Silverton dealer for further inspection and repair, if necessary.

In the event of an engine/generator compartment fire, the following steps should be taken to avoid the likelihood of personal injury or death and to minimize property damage:

- Remain calm and avoid panic.

- Immediately turn off the Engine Ignition, Engine Compartment Ventilation Blowers and the Generator.

NOTE: Do NOT turn off power to your VHF Radio.

- If you have diesel engines, manually set-off the Halon System. You do this just in case the system did not go off.

- DO NOT open the engine/generator Compartment for at least ten(10) minutes to allow the Halon vapor to extinguish the fire.

- Remove your portable fire extinguisher from its mounting bracket and prepare it for use, if necessary.

- Instruct all passengers to put on their Personal Flotation Devices(PFD's) and move away from the source of the fire.

- Contact the United States Coast Guard on your VHF radio and advise of your situation and location. Maintain radio contact until the crisis has ended and assistance has arrived.

- If the fire is successfully extinguished, examine the engine compartment components for damage. DO NOT start your engines if any damage is noted. Request towing assistance to a safe harbor and contact your Silverton Dealer for a thorough inspection and repairs.

- When replacing parts of the fire fighting installation only matching components shall be used, bearing the same designation or being equivalent in their technical and fire resistant capabilities.

REFER to the Manufacturer's Manual for a detailed description of your AUTOMATIC FIRE EXTINGUISHER SYSTEM. Be certain to complete the Warranty card and mail to the manufacturer within 10 days of your purchase.

PORTABLE FIRE EXTINGUISHER SYSTEM

As a yacht owner or operator, you have the responsibility of having the required quantity of United States Coast Guard approved portable fire extinguishers aboard at all times, except during storage. The portable fire extinguishers must be operational and of the proper classification.

The classification of portable fire extinguishers and their appropriate use is as follows:

CLASS "A"

"Fires in ordinary combustible materials, such as wood, paper and cloth, where the quenching-cooling effect of quantities of water or high water content solution cools the burning material below the ignition temperature."

CLASS "B"

"Fires in flammable petroleum products or other flammable liquids, greases, etc., where the blanketing-smothering effect of oxygen-excluding media is most effective."

CLASS "C"

"Fires involving electrical equipment where the electrical conductivity of the extinguishing media is the first consideration."

Your **43MY** is equipped with two(2) Class B/C portable, handheld fire extinguishers. Class B/C fire extinguishers will effectively fight fires of the Class "B" and Class "C" type. The Class B/C portable fire extinguisher contains pressurized dry powder, which when released, will leave a powder residue that smothers the fire and removes its source of oxygen. Once the source of oxygen is removed, the fire

cannot continue to burn and it will be extinguished.

The fire extinguishers shipped with your **43MY** should be mounted in a readily accessible location away from the engine compartment, but in a relative position to potential fire hazards, such as the Galley. The fire extinguishers should be mounted within plain view and all passengers on board should be familiar with their location and operation before departing your dock. Maintenance of your portable fire extinguishers should consist of periodic cleaning of the canisters and making certain they are easily seen and readily accessible. Periodically examine the gauge on each fire extinguisher to be sure they are fully charged. If the gauge indicates the fire extinguisher is not fully charged, contact your Silverton dealer for replacement. **DO NOT** test the charge of your portable fire extinguishers by operation of them; it will discharge them unnecessarily.

Refer to the operating instructions displayed on the fire extinguisher canisters for a detailed description of their operation and use.

FRESHWATER SYSTEM

The purpose of the **Fresh Water System** is to provide a supply of pressurized potable water to the Galley, Heads and Transom Exterior Shower on demand and as needed. Your **43MY** has two(2) separate systems that are independent of each other and they are identified as follows:

- **Fresh Water Pump System**
- **Dockside Water Supply System**

Fresh Water Pump System

The Fresh Water Pump System on your **43MY** consists of the following components:

Fresh Water Tank (150 gallon capacity):

The fresh water tank is located directly under the Aft Stateroom deck. The photo below shows the fresh water tank.



The Mechanical Schematic in the SCHEMATICS SECTION of this owners manual shows the location of the fresh water tank. The tank is filled through a fill fitting that is marked "WATER" on the fill cap, which is located on the first step going up on the aft access steps going to the Aft Deck from the swim platform. The photo below shows the Waste Discharge cap and the Fresh Water Fill cap.



The Fresh Water fill is on the starboard side in the photo. The cap on the right side is the Waste Removal cap. The Deck Layout in the Schematics Section of this manual will show the location of the Fresh Water Fill.



Fill the fresh water tank ONLY with potable water that is safe for drinking. DO NOT fill with water that may be of questionable quality as serious illness or death may occur.

Fresh Water Pump:

The fresh water pump is located aft of the engine room. The fresh water pump operates on DC electrical power controlled by a breaker switch located on the AC/DC Electrical Panel. The fresh water pump is equipped with an automatic pressure switch and when it is supplied with electrical power, it will operate until the entire fresh water system is pressurized to a preset level. Once the required pressure is obtained, the fresh water pump will automatically shut off. The fresh water system should maintain the preset level of water pressure until one of the faucet or shower valves is opened. When the required

pressure is lowered below the preset level, the fresh water pump will automatically return to operation.

Fresh Water Filter:

The water pumped from the fresh water tank flows through a filter located on the suction side of the fresh water pump. Its purpose is to remove impurities that may be present in the fresh water system prior to its consumption. The filter is easily removed from the fresh water pump and should be cleaned on a regular basis. The photo below shows (from left to right) the Accumulator, Fresh Water Pump, and the Filter. The accumulator maintains a constant pressure throughout your water system.



Fresh Water Lines (Cold Water and Hot Water):

The fresh water lines carry the water from the fresh water tank, the water heater, and the various faucets located in the Galley and Head areas of your **43MY**. They are constructed of polybutylene plastic material and are 1/2 inch inside diameter. The COLD WATER lines have pale blue manufacturer's lettering and the HOT WATER lines have pale red manufacturer's lettering for identification purposes. The fresh water lines require

minimal maintenance, but they should be visually examined on a regular basis for any leaks, chafing or cracking. Tighten any loose connections as necessary. See your Silverton dealer for inspection of any suspected defective fresh water lines and their replacement, if necessary.

Dockside Water Supply System

Your **43MY** is equipped with a dockside water inlet located in the storage compartment which is located above the swim platform. The photo below shows the Fresh Water Inlet.



This system operates independently of the Fresh Water Pump System and simply depends on its connection to a suitable garden-type water hose for its supply of fresh water. When the water supply is connected to the water inlet and turned ON, the system is automatically pressurized without the need for the fresh water pump. The water entering this system will not fill the fresh water tank; a check valve, located in the pressure line of the fresh water pump, prevents the water from entering the fresh water tank. Be sure to turn OFF the fresh water pump at the AC/DC Panel when connected to the shore water supply.

 **WARNING**

Connect this system ONLY to a potable water system that is safe for drinking. DO NOT use water that may be of questionable quality as serious illness or death may occur.

When you are connecting your system to a dockside water supply, be certain to examine all connections and water lines for any leaks. If any leaks are noted, turn OFF the water supply immediately and make the necessary repairs before you again turn ON the water supply. Remove any trapped air from the water system by opening all faucets until the air is exhausted and there is a steady flow of water. Close the faucets after the air is removed.

 **CAUTION**

Always turn OFF the dockside water supply source when leaving your yacht unattended. A leak in the system could result in flooding and may cause your yacht to sink.

Refer to the WINTERIZATION AND STORAGE PAGES in the Cleaning and Maintenance Section of this Owner's Manual for the proper preparation and maintenance of your FRESH WATER SYSTEM prior to seasonal storage of your yacht.

FUEL SYSTEM



Fuel, especially gasoline, is extremely flammable. Failure to follow these recommendations and the rules of good common sense could result in fire or explosion, which could cause personal injury or death.

The purpose of the Fuel System is to maintain the necessary supply of fuel to the engines and generator upon demand and as needed. The fuel system on your **43MY** is comprised of the following components, which will be described separately:

- Fuel Tanks
- Fuel Tank Fills and Vents
- Fuel Tank Grounding System
- Fuel Distribution Hoses
- Fuel Supply Valves
- Fuel Filtration
- Generator Fuel Selector Valve
- Fuel Gauge and Selector Switch

Fuel Tanks



Your **43MY** is equipped with two(2) fuel tanks, each having a capacity of 262 gallons, for a total fuel capacity of 524 gallons. The photo above shows the star-

board side fuel tank. The port side fuel tank is in the same location but on the port side. Both fuel tanks are located outside of the engines. One tank is located on the port side and one tank is located on the starboard side. See the Mechanical Schematic in the SCHEMATICS Section of this owners Manual. The port side fuel tank supplies fuel to the port engine and the starboard fuel tank supplies the starboard engine. Either tank can supply the generator, if so equipped.

Each fuel tank is equipped with a Fuel Level Sending Unit, which provides an electrical signal to the fuel gauge to indicate the fuel level. The photo below shows the sending unit on the fuel tank.



The Fuel Tanks should be inspected for signs of leaks, corrosion, and/or pitting at least once each year. Corrosion normally appears as a white chalky, discolored or flaky appearance on the surface of the tank. Sometimes it also appears as pitting or small pockets of missing aluminum. Another indication of external corrosion could be bubbles on the paint that coats the fuel tank (if painted). Corrosion occurring on the internal surfaces of the

tank is difficult to see during a visual inspection. This type of corrosion typically won't reveal itself until a fuel leak actually occurs. If any one of these conditions are present, have an authorized Silverton Service Technician inspect the tank immediately. If a leak is found, immediately turn off battery switches, disconnect shore power (instructions in the electrical pages of this section of the owners manual) and disable any possible source of ignition. Notify your Silverton Dealer or Silverton's Customer Service Department immediately.



WARNING

NEVER operate your boat if a fuel leak is present!

Fuel Tank Fill and Vent

The fuel tank is filled through the Fuel Fill Fitting and the cap is marked GAS or DIESEL, depending on the type of engines that power your **43MY**.



CAUTION

Using the wrong type of fuel will result in severe damage to the engines.



The photo above shows the Port Fuel Tank Fitting. It is located at the top of the Access steps going from the swim platform to the aft deck. The Starboard Fuel Tank Fitting is located in the same position, but on the starboard side. The fuel fill fittings are connected to the fuel tanks with the fuel hoses.

Each fuel tank has a hull vent fitting. These fittings are located on the port side and starboard sides of the hull. The photo below shows the port side fuel vent.



The starboard side vent is in the same location on the other side of the hull. The vent fittings are connected to the fuel tanks with the fuel vent hoses. These vents allow air to pass through them when fueling and when the engines are drawing fuel from the tanks.

The fuel fill and fuel vent hoses, fittings and connections should be inspected for leaks and signs of dry rot or swelling at least once a year. If any of these conditions are present, have an authorized Silverton Service Technician inspect the entire fuel system immediately. If a leak is found, turn OFF the battery switches,

disconnect the shore power(refer to the electrical pages in this section of the owners manual)and disable any possible source of ignition. Contact your Silverton dealer or Silverton's Customer Service Department immediately.

WARNING

Leaking fuel is a fire and explosion hazard; personal injury or death could occur.

If any fuel fill or vent hoses are in need of replacement, be certain that ONLY USCG TYPE A1 or A2 are used.

WARNING

The use of any hose other than USCG TYPE A1 or A2 could result in fuel leakage. Leaking fuel is a fire and explosion hazard; personal injury or death could occur.

Fuel Tank Grounding System

The fuel tank and fuel fill on your **43MY** are electrically grounded(or bonded) to the ground buss of the bonding system. The grounding system is designed to prevent the discharge of static electricity, which could cause a spark, especially when fueling your yacht. An authorized Silverton Service Technician should inspect this system at least once each year.

WARNING

While fueling, a spark caused by static electricity could result in fire or explosion, which could cause personal injury or death.

Fuel Distribution Hoses

Each engine has a fuel supply hose that runs from the pickup tube in the fuel tank to the engine. Also, each engine has a fuel return hose that runs from the engine to the fuel tank. The generator has a fuel supply hose that runs from the fuel tank to the fuel selector valve. If your **43MY** is diesel powered, there is also a fuel return hose routed similar to the supply hose. See the photo below which show the fuel distribution hoses at the fuel tank.



The fuel distribution supply and return hoses, fittings and connections should be inspected often for leaks and signs of wear, dry rot, cracking, chafing or swelling. A good way to examine the fuel hoses is to run your hand along the length of the hose including the fittings. Small leaks will be revealed as wet spots on your hand. If any evidence of hose deterioration is present, have a qualified technician replace all of the hoses with USCG TYPE A1 hoses immediately. If a leak is found, turn OFF battery switches, disconnect shore power and disable any possible source of ignition. Do not start your engines, the generator or any devices that could create a spark. Contact your Dealer or Customer Service Department immedi-

ately. If hoses need to be replaced, make sure that only USCG TYPE A1 are used. TYPE A2 is not acceptable for fuel distribution.

Fuel Supply Valves

If your **43MY** is powered by gasoline engines, it is equipped with an anti-siphon valves, located on each fuel supply hose at its connection to its respective fuel tank pickup tube. The purpose of the anti-siphon valve is to immediately stop the flow of fuel from the fuel tank in the event of a break in the fuel supply hose. The anti-siphon valves are automatic and do not require manual operation.

Fuel Filtration

The fuel that is supplied to the engines and generator (if so equipped) may contain impurities found in the fuel tanks or contained in the fuel from your supplier. If these impurities are not removed prior to entering the engines/generator, performance may be seriously affected. Removal of the fuel impurities is accomplished by external fuel filters, which are located within the fuel supply line.

If your **43MY** is equipped with gasoline engines, each engine has its own separate fuel filter, located aft of the engine.

If your **43MY** is equipped with diesel engines, each engine has a separate fuel filter located away from the engine. The fuel filter is located on the forward bulk-head in the engine room. The photo below shows the fuel filter for the diesel engine.




If your **43MY** is equipped with a generator, a remote fuel filter with a fuel shut-off valve is located in the main generator fuel supply line, separate from the engine fuel supply lines. The photo below shows the generator fuel filter.



An Authorized Silverton Service Technician should replace all fuel filters annually prior to spring launch.

Generator Fuel Selector Valve

43MY Generator Fuel Selector Valve

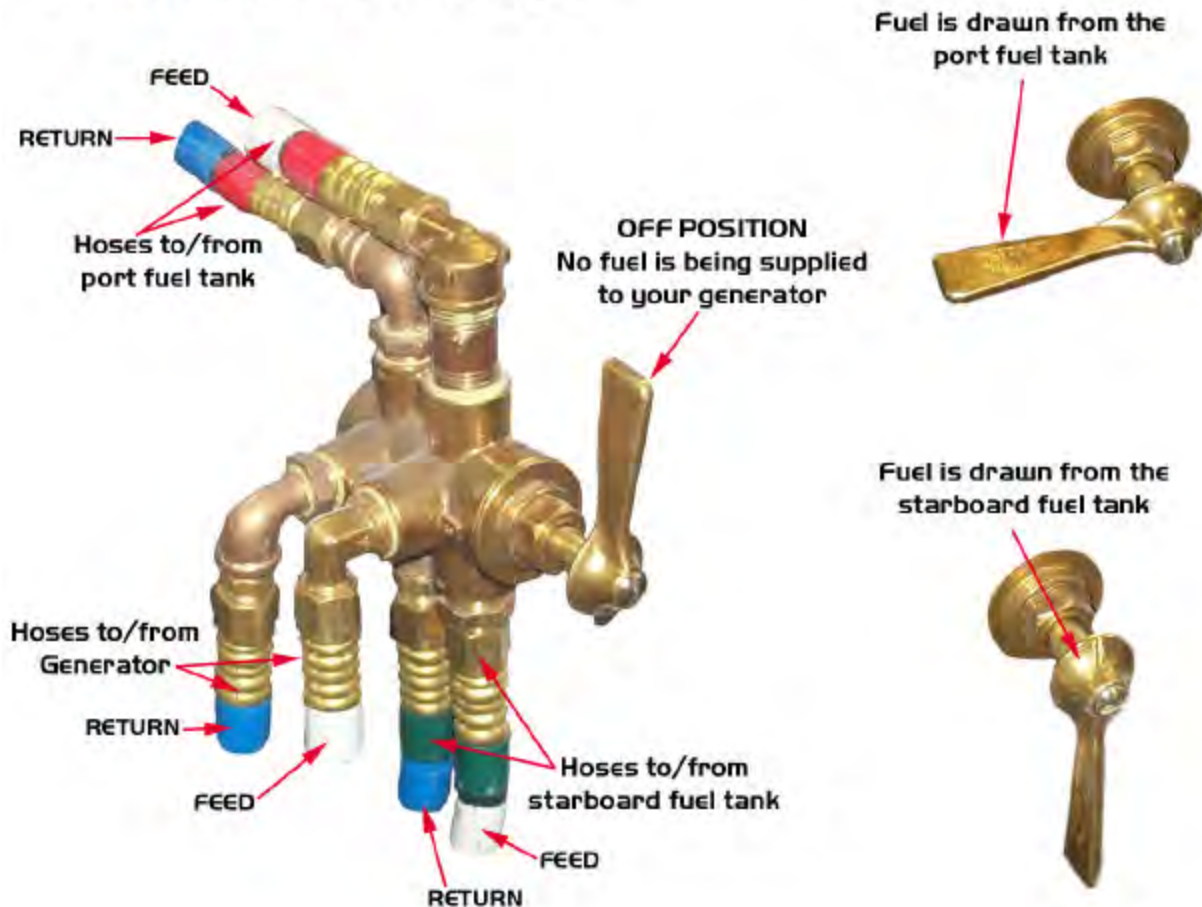

If your **43MY** is equipped with a generator, a fuel tank selector valve is located on the aft bulkhead of the engine compartment. This valve determines the tank from which the generator will draw its fuel from. The photo above shows the Fuel Selector Valve.

If your **43MY** is diesel powered, the generator fuel selector Valve also determines the tank to which the unused fuel is returned. This fuel is always returned to the

same tank that is supplying the fuel to the generator.

The fuel tank that is selected to supply the generator will display a lower fuel level than the other fuel tank when the generator is used for an extended period of time. The Generator Fuel Selector Valve can be set so that the generator will start taking fuel from the other fuel tank.

Fuel Gauge

Your fuel gauge is read from a sensor in the tank. If the boat is up and running, an accurate reading is not always possible. Be sure to check the level at rest and inspect the sender for proper electrical connections and leaks at the fuel tank. The fuel gauges on your **43MY** are located at the helm station. The photo below shows the fuel gauge at the Helm Panel.



Fueling Your 43 MOTOR YACHT

Fuel Quality

Refer to your **Engine Manual**, included with your owner's packet, for specific fuel requirements for your engine, i.e., recommended octane level.

Fuel Additives

Many times, fuel tank leaks are the result of galvanic corrosion of the tanks, pitting from the inside out. For galvanic corrosion to begin or continue, the corrosion site

must be in contact with a liquid that conducts electricity. Generally, water is required to sustain galvanic corrosion. However, alcohol additives in gasoline, particularly methanol and ethanol, in presence of very small quantities of water, transform the gasoline into a blended solution of gasoline and water. This solution sometimes becomes a conductive liquid that can promote galvanic corrosion. In the last ten to twelve years due to changes in gasoline formulations, fuel has become potentially more corrosive. New formulations can contain up to ten percent alcohol, primarily ethanol, and oxidizers such as MTBE and others. These formulations vary widely from brand to brand, region to region, and season to season. Consumer products sold as fuel additives, such as "dry-gas", are primarily methanol. With either methanol or ethanol in fuel, water contamination may result in creating a conductive liquid.

Refer to your **Engine Manual** for recommendations concerning fuel additives.

Refer to the **Winterization and Storage Pages** in the Cleaning and Maintenance Section of this Owner's Manual concerning the use of fuel stabilizers.

Always follow the manufacturer's recommendation when using fuel additives or stabilizers.

General Guidelines For Fueling Your Yacht

Improper fueling procedures can cause boat fires and explosions. It is imperative that the following procedures be followed every time you fuel your boat:

WARNING

Leaking fuel is a fire and explosion hazard; personal injury or death could occur.

- ✓ Before fueling, check the fuel system and fuel tanks for leaks and repair or replace any components prior to fueling or starting your engines, generator or any electrical device.
- ✓ If possible, fuel your boat during daylight hours. Check fuel vents to assure the fuel tanks are not over-filled. Fuel spills are easier to detect when visibility is good.
- ✓ In very warm weather, DO NOT “top off” the fuel tanks, as the fuel will expand as it heats up and spill out the vents.
- ✓ Make sure you are using the correct fuel type required by the engine manufacturer.

CAUTION

Using the wrong type of fuel will result in severe damage to the engines.

- ✓ Be sure to turn off all engines, the generator and all devices that could create a spark prior to fueling. Battery switches should also be shut off to prevent sparks from any electrical device.

- ✓ Disconnect shore power.
- ✓ Extinguish all smoking materials and any other items that may create a spark.
- ✓ Completely close all doors, ports, hatches and windows and ask guests to leave the boat during fueling.
- ✓ Before fueling, touch the fuel nozzle to the fuel fill cap to discharge any static electricity. Open the designated fill pipe, insert the nozzle while maintaining contact with the side of the fill pipe.
- ✓ After pumping several gallons, STOP. Inspect engine and tank compartments for any signs of leakage.
- ✓ DO NOT continue fueling if leaks or the smell of fuel are present. Contact a qualified technician to inspect your boat and repair it before continuing to fuel.
- ✓ If no leaks are present, continue fueling allowing for expansion in warmer weather. Slow the flow as approaching full to avoid overflow.
- ✓ Once full, remove nozzle, replace fill cover tightly and clean up any spills.
- ✓ After fueling has been completed, open all hatches, doors and compartments. Visually check all fuel fittings, lines and tanks for leakage, including engine and generator fuel lines. Immediately notify a qualified technician of any problems and correct them before proceeding.
- ✓ Turn main battery switches on to operate bilge blower. Ventilate all bilges for at least five minutes.
- ✓ Make a final inspection of the engine and/or generator space and smell for fumes. If they are present, open all doors and ports and evacuate the boat. Notify the Dockmaster and request a qualified technician to correct the problem. If it is

FUEL SAFETY CHECKLIST FOR BOARDING

This fuel safety checklist is designed to be used as a quick reference to minimize the risks associated with fuel hazards. You should refer to this checklist every time you board your yacht. Read your owner's manual so that you have a full understanding of the fuel system on your yacht.



Fuel, especially gasoline is extremely flammable. Failure to follow these recommendations and the rules of good common sense could result in fire or explosion; which could cause personal injury or death.

- ✓ Before approaching your boat, extinguish all smoking materials and make certain there are no other devices on or near your boat that could create a spark and start a fire or cause an explosion.
- ✓ Approach your boat alone to make the initial inspection. Have your guests and crew standby at a safe distance away from your boat.
- ✓ Visually inspect your boat from the dock for any fuel leaks from the deck fills or hull vents and take notice if there is any odor of fuel. Also, check the water surface around your boat for signs of fuel.
- ✓ Once onboard, open the cabin door and sniff at the doorway and then inside the cabin for fuel odor.
- ✓ Open the engine compartment hatch and sniff for fuel odor.
- ✓ Inspect the engine compartment and all bilge compartments for fuel leaks and sniff for fuel odor.
- ✓ If there are any signs of fuel leakage, either visually or by odor, open doors, hatches, and windows and most importantly, do not start the engines, the generator or any other device that could create a spark. Shut off all battery switches. Evacuate the boat and inform the Dock Master. Have a qualified technician determine the source of the leak. **NEVER** operate your boat if a fuel leak is suspected or present!
- ✓ If no signs of a fuel leak are present, board your guests and crew.
- ✓ Run exhaust blowers for five minutes before starting the engines or generator.
- ✓ Always be aware of the hazards associated with fuel and follow all safety and maintenance procedures in this publication, the Safety Manual and Chapman's.

“HAPPY SAFE BOATING”

FROM THE SILVERTON TEAM

GENERATOR SYSTEM (Optional)

When you purchased your 43MY, a **Generator System**, manufactured by *Kohler Company* was factory installed at the Silverton plant. The generator has a 13.5 kilowatt rating. As discussed in the **Fuel System Pages of the Systems Operations section** of this Owner's Manual, fuel is supplied to the generator from the fuel tank. The **Generator System** is controlled by a breaker switch, located on the AC/DC Electrical Panel (Check the Electrical Pages of the Systems Operations Section of this manual). The system START and STOP switch is also located on the AC/DC Electrical Panel as is a slide bar switch that permits you to change from generator electrical power to shore electrical power as desired. The **Generator System** is located Forward of the engine room.



Operation of the **Generator System** is as follows:

- ✓ Turn ON the Generator System battery switch.
- ✓ Check sea strainer for debris and remove, if noted.
- ✓ Be certain the seawater intake valve that services the generator is in the OPEN position. The valve is open when the handle is parallel to the valve body.



The photo above shows the valve opened.



The photo above shows the valve closed.

- ✓ Turn ON the breaker located on the generator.
- ✓ Move slide bar switch to generator power mode.
- ✓ Operate generator compartment blower motor for at least five (5) minutes before starting generator and continue to run while operating your yacht below cruising speed.

- ✓ Check for presence of Gasoline or odor in the Bilge.

WARNING

Gasoline vapors in the bilge can cause explosion and fire aboard your yacht.

- ✓ Start the generator (Refer to “Starting Instructions” section in the Generator Manual included with your owner’s packet).
- ✓ Depress START switch on AC/DC Electrical Panel until generator starts.

CAUTION

DO NOT depress START switch for more than thirty(30) seconds as damage to the generator starter motor may result. If the generator does not start within 30 seconds, release the START switch and allow the starter motor to cool for at least sixty(60) seconds before again attempting to start the generator.

To cease operation of the Generator system, depress the STOP switch on the AC/DC Electrical Panel. After the generator stops running, release the STOP switch. Continue to operate the blower motor for several minutes to be certain the generator compartment is completely evacuated of any fuel fumes. Return the slide bar switch to the shore power mode and turn OFF the breaker switch. Turn OFF the Generator System battery switch. Refer to “Generator” in the Electrical System pages in this section of this manual for using the generator output to power the boat.

DANGER

While operating your Generator system, always be certain there is adequate ventilation in the cabin areas of your yacht to avoid the potential accumulation of Carbon Monoxide Gas(CO). Carbon Monoxide Gas is colorless, odorless and tasteless. It is highly poisonous, endangering lives even at very low levels of concentration. Mild exposure causes headaches and fatigue, often resembling “flu-like” symptoms. Medium exposure causes severe headaches, drowsiness, nausea and rapid heart rate. Extreme exposure results in unconsciousness, convulsions, cardiorespiratory failure and death. If Carbon Monoxide Gas is detected in your yacht, immediately contact a qualified technician to locate and repair the source of the poisonous gas. DO NOT enter your yacht until repairs have been made and the Carbon Monoxide Gas is lowered to an acceptable level. Refer to the Carbon Monoxide Gas(CO) Detector System Section of this Owner’s Manual for additional information and cautions concerning this deadly gas.

Refer to the KOHLER COMPANY Generator Manual included with your owner’s manual for additional technical information concerning the operation and maintenance of your generator system.

HOT WATER SYSTEM

Your **43MY** is equipped with a 10.5 gallon water heater, which is operated on the A/C electrical system. Cold water is supplied to the water heater via the fresh water pump, which is then heated for distribution when desired. Similar to the water heater in your home, there is always a continuous supply of water to maintain a full tank at all times. The water heater in your **43MY** is a “high recovery” model, meaning the cold water entering the tank is heated very quickly to replace the hot water as it is used.



Operation of the water heater is as follows:

✓ Be certain the water heater is full of water. You can easily check this by turning ON a hot water faucet. If water flows from the faucet, the water heater is full.

⚠ CAUTION

If the water heater is not full of water, damage to the heating elements may result when electrical power is turned ON to the unit.

✓ Turn ON the water heater breaker switch, which is located on the AC/DC electrical panel. The Electrical Pages in this section of this manual explain the location of this switch.

NOTE: The water heater will operate on AC electrical current only. You must either plug in your shore power cord or operate your generator (if so equipped) for the water heater to function.

✓ Allow sufficient time for the water heater to heat its contained water before using (approximately 1/2 hour).

General maintenance of the Hot Water System is as follows:

✓ Inspect all water lines and their connections at regular intervals. Tighten connections as needed. If the water lines appear worn or are not flexible, see your Silverton dealer for replacement.

✓ Manually operate the pressure relief valve on the water heater at least once a year (See photograph below, which illustrates the location of the valve).



! WARNING

DO NOT operate the pressure relief valve while the water heater contains hot water. Serious burns or injury could result.

✓ Flush out the water heater tank at least once a year, if not used regularly.

✓ Refer to the **Winterization and Storage pages** in the Cleaning and Maintenance section of this Owner's manual for proper preparation for seasonal storage of the water heater.

PROPULSION SYSTEM

Propulsion of your **43MY** is accomplished by two inboard engines, located within the engine compartment. Depending on the option you chose upon purchase from your Silverton dealer, the engines are either fueled by gasoline or diesel fuel. Each engine transmits its power to a separate transmission, which rotates the attached propeller shaft and the propeller, providing forward or reverse movement of your yacht as selected from the shift control unit located on the Port side of the helm. The photo below shows the Throttle and Shift Control at the Helm.



The transmissions are counter-rotating. This is defined as when in the forward shift mode and viewing forward from aft, the Port transmission rotates the Port propeller counterclockwise and the Starboard transmission rotates the Starboard

propeller clockwise.

Access to the engine compartment in your **43MY** is provided through the Hatch in the deck of the Salon area.

The engine starting procedure is as follows:

- ✓Open and inspect the engine compartment. Use your sense of smell to detect the presence of fuel fumes.
- ✓Turn battery switch ON.
- ✓Operate the bilge blower motors for at least five (5) minutes. Check for air flowing out of the bilge exhaust vent. The location of the Exhaust Blower Vent is shown in the Bilge Ventilation System Pages of this section of the owners manual. If you feel air flowing from the exhaust vent, the bilge blower motor is operating properly.
- ✓Check the bilge water level. If it appears above normal, turn ON the bilge pump(s) and remove the water. Determine the source of the excess water and repair, if necessary, before starting the engines.
- ✓Check the bilge for the presence of any oil. Determine the source of the oil and repair, if necessary, before starting the engines.
- ✓Open both engine seawater intake valves(location of these valves are shown on the Mechanical Layout in the Schematics Section of this Owners manual). The valves are open when the handles are parallel to the valve body(See photograph below and the adjacent photograph, which

illustrates the open and closed positions of the engine seawater intake valves).



The photo above shows the valve closed.



The photo above shows the valve open.

- ✓Visually examine both seawater strainers to ensure they are free of debris. Clean if debris is noted.
- ✓Check all cooling and lubricating fluids(See photograph below, which illustrates the location of the engine oil “dip-stick”). Add engine oil or transmission oil, if

needed, but DO NOT overfill.



WARNING

DO NOT remove the cooling system filler cap when the engine is hot. Allow the engine to cool and then remove the pressure cap slowly, allowing the pressure to vent. Hot coolant, under pressure, may discharge violently and result in serious personal injury and burns.

- ✓Place the transmission shift controls at the helm station in the neutral position. The feel of a “detent” midway between the forward and reverse positions indicates the neutral position.
- ✓Place the throttle controls in the idle or “down” position.
- ✓Turn the ignition key to ON, but not to START. The engine alarm buzzer should sound and the automatic fire extinguisher system indicator light should illuminate.
- ✓Turn the ignition key to START and hold in this position until the engine starts. If the engine starter motor does not operate, the neutral safety switch may be out of adjustment. Slowly and carefully move the

transmission shift control lever up and down until the starter motor operates. See your Silverton dealer or a competent technician as soon as possible to obtain the proper adjustment for the neutral safety switch. Release the ignition switch as soon as the engine starts. The engine alarm buzzer should turn OFF when the engine oil pressure reaches normal operating range. The automatic fire extinguisher indicator light should remain illuminated.

CAUTION

If the engine fails to start within thirty(30) seconds, release the ignition switch. Allow the starter motor to cool for at least sixty(60) seconds and then try again to start the engine. Prolonged starting attempts may result in starter motor overheating and damage.

CAUTION

Failure to release the ignition switch from the START position after the engine starts may result in serious damage to the starter motor and/or engine flywheel.

CAUTION

If the engine alarm buzzer DOES NOT turn OFF, turn OFF the engine immediately if the oil pressure gauge displays no, or very low, oil pressure. See your Silverton dealer for inspection and repair, if necessary. No, or very low, oil pressure may cause serious damage to the internal mechanism of your engine(s).

WARNING

If the automatic fire extinguisher indicator light DOES NOT remain illuminated, turn OFF the engine(s) immediately and follow the proper procedure to check for fire aboard your yacht as detailed in the Automatic Fire Extinguisher System Section of this Owner's Manual. A fire aboard your yacht may result in serious personal injury or death.

✓If one of the batteries is "dead" or not sufficiently charged to start your engine, depress the "Parallel Start Switch" simultaneously while turning the ignition switch to START. The parallel start switch draws power from both batteries during the starting procedure and it is located on the helm switch panel. Refer to the Electrical pages of this section of your Owners manual for a location of the Switch. Release both switches immediately after the engine starts.

CAUTION

DO NOT continue to depress the "Parallel Start Switch" after the engine has started. Damage to the alternator(s) may result.

After you have started both engines and determined they are running properly, the "warm-up" procedure should be followed before departing the dock/mooring. The proper "warm-up" procedure is as follows:

✓Check the oil pressure gauges to be certain each engine has sufficient oil pressure. Gasoline engines should have between 30 and 50 psi(pounds per square inch) and diesel engines should have between 35 and 70 psi. If the oil pressure is lower than the normal operating range, turn OFF the respective engine and contact your Silverton dealer for further inspection and repair, if necessary.

✓Allow the engines to run at the RPM's specified in the Engine Manual until they reach the proper operating temperature. Normal operating temperature for gasoline engines is 140° F with a raw water cooling system and 170° F with a fresh water cooling system. The normal operating temperature for diesel engines is between 170° F and 190° F. If the engine temperature rises significantly above the normal operating range (10° F), turn OFF the respective engine and contact your Silverton dealer for inspection and repair, if necessary.

✓Check the exhaust outlets for the presence of water. Water coming from the exhaust outlets indicates proper water circulation in the engine exhaust system. Water should start coming out of the exhaust outlet shortly after the engine is started. If you do not observe any water coming from the exhaust outlet(s), turn OFF the respective engine and contact your Silverton dealer for inspection and repair.

✓Visually inspect the engine compartment for fuel, oil and water leaks. If leaks are found refer to your Fuel Section of this manual. Also, contact your Silverton dealer for inspection and repair, if necessary.

✓Visually inspect the exhaust system for leaks. If any leak is observed, immediately turn OFF the engines and contact your Silverton dealer for inspection and repair, if necessary.

✓Check the transmission fluid level. The engines should be running at idle speed and at normal operating temperature. The transmission fluid should read FULL on the "dipstick". If the fluid level is low, add sufficient transmission fluid to raise the level to the FULL mark or slightly lower. DO NOT overfill. If the fluid level is low, check the transmission(s) for leaks and contact your Silverton dealer for repairs if leaks are noted.

Refer to the ENGINE MANUAL included with your owner's packet for additional technical information concerning maintenance requirements for the specific engines with which your **43MY** is equipped.

Bow Thruster

You may have chosen as an option when you purchased your **43MY**, a **Bow Thruster System**. The purpose of this system is to aid in maneuvering your yacht in close quarters, such as departing or entering a marina boat slip. The **Bow Thruster** propels the bow of your yacht in a Port or Starboard direction, depending on your selection, which is made from a control panel located at the helm station. The **Bow Thruster** operates on DC electrical power, controlled by a breaker switch, located on the Bilge DC electrical panel .

Refer to the BOW THRUSTER Manual included with your owner's packet for additional technical information concerning the operation and maintenance of this optional system.

MARINE SANITATION SYSTEM

All vessels with fixed toilets that are operated on the waterways of the United States and some foreign countries are required to be equipped with an operable Marine Sanitation Device(MSD). The **Marine Sanitation System** in your **43MY** is a Waste Tank system, defined by the United States Coast Guard as a Type III System. Type III Systems permit operation of the toilet without the direct discharge of untreated waste after every flush. Type III Systems can be discharged at marina dockside pump-out stations or, if in coastal waters, at least three(3) miles offshore.

NOTE: Overboard discharge capability must remain inoperative while within the 3 mile limit. This is accomplished by closing the macerator discharge thru-hull valve. Refer to the Mechanical Layout Schematic in the Schematic Section of this owners manual for the location of the valve.

Your **43MY** is equipped with one of the following **Marine Sanitation Systems**, depending on the option you chose from your Silverton dealer at the time of purchase:

- *SeaLand*/Vacuflush Toilet
- *Jabsco* Quiet-Flush Electric Toilet (Fresh Water)
- *Jabsco* Electric Toilet (Raw Water)

SeaLand/Vacuflush Toilet

This system is operated by vacuum, combined with a small quantity of water supplied by the pressurized fresh water system (approximately one(1) pint per

flush) and is controlled by DC electrical power. Each toilet is equipped with an integral vacuum breaker that prevents a backflow of contaminated water into the potable water supply. Vacuum energy, supplied by the Vacuum Pump, is stored in a Vacuum Tank and is monitored to maintain a certain level. The Vacuum Pump is controlled by an electrical breaker switch, located on the AC/DC Electrical Panel. Refer to the Electrical Pages of this section in this Owners Manual for the location of the switch. As the toilet is flushed, vacuum energy is depleted and the Vacuum Pump will automatically activate to restore the required level. The Vacuum Pump will operate for approximately 30 to 90 seconds until the system reaches the required operating vacuum level. Toilet waste, both liquid and solid, is removed by the vacuum energy and water combination to a Waste Tank having a capacity of sixty (60) gallons. The Mechanical Layout in the Schematics Section of this Owners manual shows the location of the Tank. This waste is stored in the Waste Tank until pumped out at a proper facility. The photo below shows the waste tank. It is located under the forward stateroom.



The Waste Tank is equipped with an electronic Waste Level Gauge, which monitors the volume of waste in the tank for your convenience in determining when pump-out is required



Maintenance of your *Sea Land Vacuflush* Sanitation System consists of periodic cleaning of the toilet bowl with a mild nonabrasive cleaner. The Waste Tank should be thoroughly rinsed after each pump-out and a sanitation system deodorizer should be added to the Waste Tank by flushing through the toilet.



DO NOT use chlorine-based or caustic cleaning agents or chemicals, such as drain opening products, in your *SeaLand Vacuflush* Sanitation System. Use of these products may cause serious damage to the system's seals and hoses.

Refer to the SEALAND VACUFLUSH SANITATION SYSTEM MANUAL included with your owner's packet for additional information concerning the use and maintenance of this system, including the proper procedure for winterization and storage.

Jabsco Quiet-Flush **Electric Toilet (Fresh Water)**

This system is operated by water supplied by the pressurized fresh water system (approximately 1 - 2 quarts per flush) and is controlled by DC electrical power. Each toilet is equipped with a push button switch, that when depressed, activates both the rinse water supply and the macerator discharge pump simultaneously. In addition to the push button switch, a separate rocker-type switch may be used to control the rinse water supply, independent of the macerator. This feature allows conservation of your fresh water supply as well as the ability to raise the water level, if needed, for proper evacuation of the toilet bowl under all conditions. To prevent contamination of the fresh water supply, this system is equipped with an anti-siphon breaker contained in the water control solenoid valve. The water control solenoid valve of each toilet is controlled by an electrical breaker switch, located on the AC/DC Electrical Panel (Refer to the Electrical Pages of this section of this Owners Manual for the switch location). Toilet waste, both liquid and solid, is flushed from the toilet by the macerator to a Waste Tank having a capacity of sixty(60) gallons (See **Mechanical Layout** in the Schematics Section of this Owners Manual for the location of the Waste Tank). This waste is stored in the Waste Tank until pumped out at a proper facility. The Waste Tank is equipped with

an electronic Waste Level Gauge, which monitors the volume of waste in the tank for your convenience in determining when pump-out is required.

Jabsco Quiet-Flush Electric Toilet(Raw Water)

This system is identical to the fresh water system in its operation, but uses raw water pumped from the sea as its rinse water source instead of fresh water supplied by the pressurized fresh water system. This system is not equipped with a separate rocker-type switch to control the rinse water level and the volume is consistent (approximately 1 - 2 quarts per flush). As with the fresh water system, to prevent contamination of the raw water supply, this system is equipped with an anti-siphon breaker contained in the water control solenoid valve. The water control solenoid valve of each toilet is controlled by an electrical breaker switch, located on the AC/DC Electrical Panel(See the Electrical Pages in this section of this Owners Manual for the location of the breaker switches). Toilet waste, both liquid and solid, is flushed from the toilet by the macerator to a Waste Tank having a capacity of sixty(60) gallons(refer to the Mechanical Schematic in the Schematics Section of this Owners Manual for the location of the Macerator and the Waste Tank). This waste is stored in the Waste Tank until pumped out at a proper facility. The Waste Tank is equipped with an electronic Waste Level Gauge, which monitors the volume of waste in the tank for your convenience in determining when pump-out is required.

Maintenance of your *Jabsco* Quiet-Flush Electric Toilet Sanitation System consists of periodic cleaning of the toilet bowl with a mild nonabrasive cleaner. The Waste

Tank should be thoroughly rinsed after each pump-out and a sanitation system deodorizer should be added to the Waste Tank by flushing through the toilet.



DO NOT use chlorine-based or caustic cleaning agents or chemicals, such as drain opening products, in your *Jabsco* Quiet-Flush Sanitation System. Use of these products may cause serious damage to the system's seals and hoses.

Refer to the JABSCO Quiet-Flush Toilet Manual included with your owner's packet for additional technical information concerning the use and maintenance of both the fresh water and raw water systems. Refer to the Winterization and Storage Section of this owner's manual for the proper preparation procedure for extended storage in cold climates.

SHOWER SUMP PUMP SYSTEM

Your **43MY** is equipped with two showers; one is located by the forward stateroom and one is located in the aft stateroom (See the **Interior Layout** in the Schematics Section of this owners manual, which illustrates the location of both showers). Each shower is equipped with a separate automatic sump pump (Refer to the Mechanical Schematic in the Schematics Section of this Owners Manual for the location of the Shower Sump Pumps). As the water drains from the shower into the sump pump to a certain level, it raises an automatic switch lever, which activates the shower sump pump and the water is pumped overboard. The photo below shows the Aft Shower Sump Pump, which is accessed through the Hatch in the deck of the Aft Stateroom.



The Forward Shower Sump pump is accessed through the hatch in the deck of the Galley. The photo below shows the Forward Shower Sump Pump.



The **Shower Sump Pump System** operates on DC electrical power. Both pumps are wired directly to the batteries and are always on. There are fuses for these pumps located behind the ACDC Panel.

General maintenance of the **Shower Sump Pump System** involves periodic cleaning to remove any accumulated debris. Remove the six(6) screws securing the top cover for access to the debris basket and automatic float switch. If you notice that the shower does not drain properly, check the pump basket for debris and clean, if necessary. If the shower still does not drain properly, check the operation of the pump by manually raising the automatic float switch. If the sump pump is operable, but will not drain properly, check all drain lines for debris and clean as needed. See your Silverton dealer for further inspection and repair if the shower continues to drain improperly.

Refer to the Winterization and Storage section of this Owner's Manual for the proper preparation and maintenance of the SHOWER SUMP PUMP SYSTEM prior to seasonal storage.

STEERING SYSTEM

The steering system in your **43MY** is manufactured by *Sea Star*, a subsidiary of *Teleflex (Canada, Ltd.)*, and is hydraulically assisted. Hydraulic assisted steering is similar to the power steering system in your automobile and greatly reduces the manual effort necessary to steer your yacht and maintain the desired course. The **Hydraulic Steering System** in your **43MY** differs from your automobile, as a separate pump is not used to circulate the hydraulic fluid contained in the system; the system is completely filled with hydraulic fluid and is free of air. As you turn your steering wheel, the hydraulic fluid is pumped by the steering head into the appropriate fluid line, Port or Starboard, resulting in movement of the steering cylinder in the respective direction. The steering cylinder is connected to the rudders and they are subsequently turned, which enables your yacht to turn in the desired direction; to Port or Starboard(See photograph below which illustrates the location of the steering cylinder and its connection to the rudders).



The **Hydraulic Steering System** in your **43MY** utilizes an adjustable tilt-type steering head, which allows you to adjust the steering wheel angle for maximum personal comfort. The photo below shows the tilt control on the Steering Wheel.



The steering head contains a vented fill cap. The vented cap is located on the top of the steering head and forward of the steering wheel. The photo below shows the vented cap.



Maintenance of the **Hydraulic Steering System** should only be performed by your Silverton dealer or a qualified technician, who is experienced in marine hydraulic

systems. Periodically examine all connections and hydraulic lines for any signs of leakage. If any leaks are noted, contact your Silverton dealer for further inspection and repair, if necessary.

Refer to the SEA STAR Manual included with your Owner's Packet for the specific type of hydrolic fluid required and technical information concerning the Hydraulic Steering System.

SHIFT/THROTTLE CONTROL SYSTEM (MORSE CONTROLS) (OPTIONAL)

You may have chosen as an option when you purchased your **43MY**, an electronically controlled **Shift/Throttle Control System**, manufactured by Mathers, and factory installed at the Silverton plant. The purpose of this system is to provide the operator with smooth, positive shift and throttle operation requiring minimal manual effort. With this system, only one(1) shift/throttle control lever is required per engine; the left control lever operates the Port engine and the right control lever operates the Starboard engine.

The **Mathers Shift/Throttle Control System** is operated on DC electrical power, controlled by a breaker switch located on the AC/DC electrical Panel and described as "Accessory"(Refer to the Electrical Pages in this section of this Owners Manual for the switch location).

Refer to the MATHERS Manual included with your owner's packet for additional technical information concerning the operation and maintenance of the MATHERS SHIFT/THROTTLE CONTROL SYSTEM.

TRIM TAB SYSTEM

The purpose of the **Trim Tab System** on your **43MY** is to assist in reaching planing speed as soon as possible and to maintain a proper “running attitude” while in forward motion. “Running Attitude” is defined as the level of the boat, both fore and aft and athwartships, while the vessel is underway. Your yacht, upon reaching planing speed, should rise slightly in the bow and should not list to either side for the greatest stability and fuel economy. Your **43MY** is equipped with two(2) *Bennett* trim tabs, each measuring 12” x 24”, which are mounted on the trailing edge of the transom(See photograph below, which illustrate the location of the port trim tab).



Each trim tab operates independently of each other and they are controlled by separate rocker-type switches, located on the Helm Switch Panel (Refer to the Electrical Pages in this section of this Owners manual for the location of these switches). Each trim tab is actuated by a hydraulic cylinder, which moves them in an Up or Down motion.

The position as determined by depressing the rocker-type switches as follows:

- Depressing the TOP of the switch lowers the trim tab.
- Depressing the BOTTOM of the switch raises the trim tab.

The **Trim Tab System** operates in the following manner:

- ✓The function of the trim tab is to redirect the flow of water beyond the bottom of the transom. This creates an upward pressure on the hull bottom at the transom, which results in lowering the bow.
- ✓When the Port trim tab is lowered, the Port stern section is raised, which lowers the Starboard side of the bow.
- ✓When the Starboard trim tab is lowered, the Starboard stern section is raised, which lowers the Port side of the bow.
- ✓Both trim tabs should be lowered/raised as needed to maintain a proper “Running Attitude”.

WARNING

Operation of the Trim Tab System may require practice to attain a level of proficiency. DO NOT operate either trim tab to its extreme lowered position suddenly. This may cause the bow to lower to an unsafe position while heading into or away from waves, which may cause “swamping” of your yacht, resulting in possible injury or death. DO operate the trim tab switches with short “bursts” until the desired “Running Attitude” is obtained.

Maintenance of the **Trim Tab System** is as follows:

- ✓Silverton recommends painting the trim tabs with good quality, antifouling bottom paint. DO NOT paint any hinges or the moving parts of the cylinders.

- ✓To reduce the risk of electrolysis and galvanic corrosion, Silverton recommends the installation of sacrificial zinc anodes on the trim tab plates at least once a year, preferably during preparation for spring launch. DO NOT paint the sacrificial zinc anodes.

- ✓Periodically examine the trim tabs for accumulation of underwater growth and clean as necessary.

- ✓Periodically examine the trim tab pump and hydraulic lines, which are located in the bilge area, for leaks(Refer to the Mechanical Schematic in the Schematic Section of this Owners Manual for the location of the trim tab pump). Tighten connections if leaks are noted. If the hydraulic lines appear worn or chafed, contact your Silverton dealer for inspection and replacement, if necessary. The photo below shows the trim tab pump.

Refer to the BENNETT TRIM TAB Manual included with your owner's packet for technical information concerning the operation and maintenance of the trim tab system.



ICEMAKER UNIT (OPTIONAL)

You may have chosen as an option when you purchased your **43MY**, an **Icemaker Unit**, manufactured by *U-Line Corporation* and factory installed at the Silverton plant. The purpose of this system is to provide you with a continuous supply of fresh ice upon demand and as needed.

The **Icemaker Unit**, which is located in the cockpit, operates on AC electrical power and is controlled by a breaker switch located on the AC/DC electrical Panel(See **AC/DC Electrical Pages in this section of this owners manual**, which illustrates the location of the breaker switch that controls the **Icemaker Unit**). While your **43MY** is underway, you must operate your generator(if so equipped) to maintain operation of the **Icemaker Unit**.

Refer to the *U-LINE CORPORATION ICEMAKER MANUAL* included with your owner's packet for specific instructions concerning the operation and maintenance of the **ICEMAKER UNIT**.

LPG SYSTEM (OPTIONAL)

You may have purchased as an option with your **43MY** an optional LPG Cooking System. This system is manufactured by Seaward Products. The purpose of this option is to give an alternative to electric cooking in your boat.



Open flame appliances consume oxygen. This can cause asphyxiation or death. Maintain open ventilation. Do not use this appliance for comfort heating.

It is recommended that every time the LPG tank valve is opened for use, the operator close the valve and watch that the gauge needle remain constant. If leaks occur, repair the leak. If the leak cannot be repaired, DO NOT operate the appliance.

Regular cleaning with a soft cloth and warm detergent solution is generally enough to keep your cooktop clean and beautiful. This is done when the cooktop is cool. Use a dry cloth or paper towel to clean splatters and spills when surfaces are warm.

Due to the nature of LPG gas it is necessary to discuss safety items associated with the operation this system.

1) This system is designed for use with Liquefied Petroleum Gas(LPG) only. Do not connect Compressed Natural Gas(CNG) to this system.

2) Keep cylinder valves and solenoid valves closed when boat is unattended. Close them immediately in any emergency. When on board, cylinder valves and solenoid valves shall be closed when appliances are not in use. Keep empty cylinder valves closed tightly. Keep protective covers caps or plugs in place.

3) Close appliance valves before opening cylinder valves.

4) Test for system leakage each time the cylinder supply valve is opened for appliance use. Close all appliance valves. Open then close cylinder supply valve. Observe pressure gauge at the regulating device and see that it remains constant for not less than three minutes before any appliance is used. If any leakage is evidenced by a pressure drop, check system with a leak detection fluid or detergent solution which does not contain ammonia and repair before operating system. NOTE: Ammonia, which is present in some soaps and detergents, attacks brass fittings. Undetectable at first, in a matter of months, these fittings may develop cracks and leaks.



NEVER USE FLAME TO CHECK FOR LEAKS!

5) Do not obstruct quick access to LPG system components in any way.

6) Do not use LPG cylinder housing for storage of any other equipment.

- 7) Never leave craft unattended when LPG consuming appliances are in use.
- 8) Do not smoke or use open flame when replacing LPG Cylinders.
- 9) Inspect hoses in system at least annually. Replace every five years or sooner if deterioration is found.
- 10) Inspect flue pipes at least annually. Replace if deterioration or openings are found.

REFER TO THE SEAWARD PRODUCTS OWNER'S MANUAL FOR ADDITIONAL OPERATION AND SAFETY INFORMATION ON YOUR LPG SYSTEM.

OIL X-CHANGE-R SYSTEM (OPTIONAL)

You may have chosen as an option when you purchased your **43MY**, an **OIL X-CHANGE-R System**, manufactured by *Ray Zager & Company* and factory installed at the Silverton plant. The purpose of the **OIL X-CHANGE-R System** is to automatically drain, fill and maintain engine and/or transmission oil with relative ease and no spilled oil, which is normally associated with your required periodic oil changes. The **OIL X-CHANGE-R System** consists of an enclosed pump, located in the engine compartment, which operates on DC electrical power. The system pump is controlled by a breaker switch, located on the AC/DC Electrical Panel and described as "Accessory" (Refer to the Electrical Pages in this section of this Owners Manual for the location of the switch for the **OIL X-CHANGE-R System**). Operation of the system is accomplished by turning ON the toggle switch located on the pump unit.

Refer to the OIL X-Change-R Sytem Manual included with your owner's packet for information concerning the operation and maintenance of this system.

REMOTE CONTROLLED SPOTLIGHT (OPTIONAL)

You may have chosen as an option when you purchased your **43MY**, a **Remote Controlled Spotlight**, manufactured by *ITT Jabsco* and factory installed at the Silverton plant. The spotlight unit is permanently mounted on the foredeck at the pulpit and operates on the DC electrical system. The system is controlled by a breaker switch described as "Accessory", located on the AC/DC Electrical Panel (Refer to the Electrical Pages of this section of this Owners Manual for the location of the switch that controls the **Remote Controlled Spotlight**). The spotlight control panel is located at the helm station and power to and movement of the spotlight is controlled from this remote location (See photographs below, which illustrate the location of the **Remote Controlled Spotlight** and the **Control Panel**).



Refer to the ITT JABSCO Manual included with your owner's packet for information concerning the operation and maintenance of the remote controlled spotlight.

CLEANING AND MAINTENANCE

A periodic cleaning and maintenance schedule of the interior and exterior surface for **43MY** is recommended. Not only will it maintain your yacht in pristine condition, but it will also result in a higher resale or trade-in value when you decide to purchase another Silverton yacht. A clean yacht is both pleasing to the eye and a source of pride in ownership. Cleaning and maintenance of your **43MY** is described in the following categories:

- * Interior Cleaning/Maintenance
- * Exterior Cleaning/Maintenance
- * Canvas Enclosure Cleaning & Maintenance

Interior Cleaning / Maintenance

There are several different types of surfaces in the interior of your **43MY** and all require a different method of cleaning. The surfaces and their respective cleaning and maintenance procedures are as follows:

Fiberglass

Wash with a mild soap and water solution. Thoroughly dry with a soft cloth and apply a coat of good quality wax designed for marine use.



DO NOT use abrasive cleaning agents on fiberglass surfaces, as they will scratch and dull the finish.

Wood

There are many wood surfaces in your **43MY**, such as galley cabinets, entertain-

ment cabinets and trim. Care and cleaning of the wood surfaces is identical to the maintenance of the wood surfaces in your home. Frequently remove dust from the wood with a feather duster or similar cleaning tool. Apply a good quality furniture polish, such as *Liquid Gold*, to all wood surfaces on a regular basis to maintain their beauty and lustre.

Nautolex (Vinyl)

Gently wash with a mild soap and water solution and dry with a soft, lint-free cloth on a regular basis. **DO NOT** wait for the vinyl surface to appear soiled before you clean it, as stains and ground-in surface dirt may be difficult to remove.



DO NOT use cleaning agents containing bleach, as they will remove the color tint from the vinyl surface, causing a blotching appearance and will dry the material, resulting in surface cracks.

Upholstery

The upholstery in your **43MY** is high quality and stain resistant. Frequently vacuum the upholstery to remove any dirt before it accumulates and becomes imbedded. Stains may be removed by using a quality household stain remover. Be certain to follow the manufacturer's directions concerning its use.

Carpeting

The carpet in your **43MY** is a high quality nylon pile. Normal cleaning and maintenance is accomplished by vacuuming on a frequent and regular basis. Refer to the carpet manufacturer's pamphlet included with your owner's packet for additional cleaning procedures, such as stain removal.

You may have chosen as an option at the time of purchase of your **43MY**, a “Central Vac” vacuum cleaning system. Similar to the system in your home, only a removable vacuum hose with cleaning attachments is necessary to vacuum any portion of the interior of your yacht. The “Central Vac” system in your yacht is operated on the AC electrical system with a “Ground Fault Interrupter” circuit for your protection. The vacuum motor and canister (stores the vacuumed soil) are self-contained in one unit and located in the lower portion of the dinette seat. Access to the canister is gained through a panel located on the inboard face of the dinette seat. There is one (1) vacuum hose outlet, which is located on the face of the canister access panel. Refer to the manufacturer’s pamphlet included with your owner’s packet for specific directions concerning operation of the system.

Corian

The galley and head counter tops and head sinks are manufactured of Corian, which is a superior quality, tough, scratch-resistant material. The Corian surfaces in your **43MY** are a Matte/Satin finish and are easily cleaned and maintained in the following manner:

🌀 **Cleaning:** Dirt and stains are removed by using a soap and warm water solution. Tough stains may be removed by using an ammonia-based cleaning agent. Watermarks may be removed simply by wiping the surface with a clean, damp cloth and drying with a towel.

🌀 **Disinfecting:** Occasionally wipe the surfaces with a 50/50 water and bleach solution. Rinse with warm water and dry with a towel.

🌀 **Sink Cleaning and Disinfecting:** General cleaning of the Corian sinks is the same procedure as described above. For a more thorough cleaning, occasionally fill the sink with a 50/50 water and bleach solution and let soak for fifteen (15) minutes. As the solution drains, wash the bottom and sides, rinse with warm water and dry with a towel.

🌀 **Cuts and Scratches:** Cuts and scratches may be removed from your Corian surfaces. Refer to the manufacturer’s pamphlet included with your owner’s packet for the proper procedure.

Exterior Cleaning/Maintenance

The exterior surfaces of your **43MY** consist primarily of fiberglass, stainless steel, aluminum, safety glass, acrylic plastic and anti-fouling bottom paint. As with the interior surfaces, the exterior surfaces demand frequent cleaning and maintenance and the respective procedures are as follows:

Fiberglass

Wash with a mild soap and water solution, particularly if your yacht is used in salt or brackish water. Always thoroughly wash your yacht after each use in addition to a regular, periodic washing schedule. A more frequent washing schedule may be required, depending on the environment where your yacht is normally docked/moored. A soft scrub brush may be used on the non-skid surface areas. Thoroughly dry with a soft cloth and apply a coat of good quality wax designed for marine use, such as carnauba paste wax. **DO NOT** apply wax to the non-skid surface areas, as it will render them ineffective. If your

boating season is year around, it is recommended a coat of wax be applied every three (3) months. If your boating season is restricted to the summer months, it is recommended a coat of wax be applied prior to spring launch and again at the end of the season prior to winter storage.



DO NOT use abrasive cleaning agents on fiberglass surfaces, as they will scratch and dull the finish.

Stainless Steel

The bow rail, aft deck rail, mooring cleats and other hardware on your **43MY** are manufactured of quality 316L grade stainless steel. Stainless steel will not rust under normal conditions, but it must be properly maintained on a regular basis. Thoroughly wash the hardware with a soap and warm water solution and rinse with fresh water. Dry with a soft cloth to remove any water stains. If discoloration or salt deposits are not removed with normal washing, a non-abrasive household cleaner or stainless steel polishing powder may be used with a soft bristle brush. Always scrub in the direction of the polishing lines imbedded in the stainless steel to avoid scratching the surface. For a superior shine, wipe the stainless steel with a light coat of kerosene, followed by a light coat of lemon oil. The kerosene enhances the lustre and protects the stainless steel and the lemon oil removes the unpleasant kerosene odor. Be careful not to spill or wipe kerosene on the fiberglass surfaces, as it will remove the coat of wax.



DO NOT use abrasive cleaning agents or steel wool pads or brushes, as these products may scratch and damage the stainless steel finish.

Aluminum

The windshield and window frames on your **43MY** are manufactured of aluminum, unless you purchased, as an option, stainless steel frames. The aluminum components are cleaned and maintained in the same manner as the components manufactured of stainless steel.



DO NOT use kerosene or lemon oil on any painted aluminum surfaces, as they will soften and remove the paint.



DO NOT use any abrasive cleaning agents or steel wool products when cleaning aluminum. Aluminum scratches very easily and these products will scratch the surface.

Safety Glass

The windshield and windows on your **43MY** are manufactured of safety glass similar to the safety glass found on your automobile. The safety glass on your yacht is much heavier and thicker than the glass on your automobile and meets or exceeds all American Boat and Yacht Council (ABYC) standards. The safety glass may be cleaned with the same soap and warm water solution used for cleaning

the exterior surfaces of your yacht and then dried with a soft towel. For a thorough cleaning and to remove all water stains, use a quality window cleaner, such as *Windex*, and dry with a paper towel.



DO NOT use any abrasive cleaning agents or abrasive cleaning cloths or pads when cleaning safety glass surfaces, as they will scratch the surface.

Acrylic Plastic

The venturi windshield, which is located on the bridge of your **43MY**, is manufactured of a tough acrylic plastic. Clean the acrylic plastic surfaces with a mild soap and water solution or non-ammonia based cleaner and dry with a soft cloth.



DO NOT use any abrasive cleaning agents or abrasive cleaning cloths or pads when cleaning acrylic plastic surfaces, as they will scratch the surface.

Canvas Enclosure(Optional) Cleaning/Maintenance

The canvas enclosure you purchased as an option from your Silverton dealer consists of canvas fabric, vinyl windows and zippers. An aluminum tubular frame supports the enclosure and it is secured to the bridge and deck with "snaps". Each of these components require a different cleaning and maintenance procedure and they are as follows:

Canvas Fabric

The canvas should be cleaned on a regular basis before dirt, salt and other depos-

its accumulate and become imbedded in the fabric. The canvas may be cleaned, without removal from your yacht, while it is in the normal upright position. Brush off any loose dirt and then rinse with fresh water. Wash the fabric with a mild soap and lukewarm (temperature less than 100° F) water solution, rinse thoroughly with fresh water and allow to air dry.



DO NOT use any cleaning agents containing detergent, as they will remove the protective coating, resulting in stiffness and eventual cracking of the fabric.



DO NOT dry the canvas fabric by any means other than air-drying. Use of heated drying apparatus, such as a hair dryer, will result in stiffness and cracking of the material.

Vinyl Windows

The vinyl windows in your enclosure should be cleaned on a frequent basis to extend their life and maintain clarity. Rinse off any loose dirt with fresh water and wash with a mild soap and cool water solution. After washing, rinse with fresh water and dry with a soft cloth.



DO NOT use any abrasive cleaning agents or brushes when cleaning your vinyl windows, as they will scratch the material, resulting in poor clarity.

CAUTION

DO NOT fold the vinyl windows after removing them from the enclosure. Roll them prior to placing them in storage. Folding the vinyl windows will cause creases and eventual cracking. If you anticipate long-term storage, place a soft cloth over the vinyl window and roll the window with the cloth in place. The cloth barrier will prevent the vinyl from sticking to itself, particularly during warm weather.

Zippers

The various sections of your canvas enclosure are secured together with zippers to permit easy removal of any or all sections without the cumbersome weight or size of the entire unit. The zippers are manufactured of high impact plastic coated stainless steel and have large teeth for smooth operation. They should be washed while you are washing the canvas and then periodically lubricated by rubbing a candle on the zipper in the closed position and then opening and closing several times to distribute the wax lubricant.

Aluminum Tubular Frame

The upper portion of your canvas enclosure is supported by a tubular aluminum frame. The frame is secured by stainless steel pins placed in brackets that are permanently mounted on the fiberglass surface at various locations on the bridge and deck. The aluminum frame is cleaned and maintained in the same manner as the other aluminum components on your yacht as previously described.

CAUTION

DO NOT use kerosene or lemon oil on the aluminum frame, as it will stain the canvas fabric. A small amount of lubricant, such as *CRC*, may be used to lubricate the stainless steel pins.

Two-Piece "Snaps"

The lower portion of your canvas enclosure is secured to the bridge and deck by two-piece "snaps", which are manufactured of chrome-plated brass. The female portion is permanently secured in the lower seam of the canvas and the male portion is permanently secured into the fiberglass surface of the bridge and deck. Frequently examine the snaps for the presence of dirt and remove with a soap and water solution and rinse with fresh water. Periodically lubricate the female portion with a small amount of lubricant, such as *Vaseline Petroleum Jelly*.

WINTERIZATION AND STORAGE

In most cases, the reason for storage of your yacht is winter lay-up. The information contained in this section is a general guide. Your Silverton dealer or a competent boatyard should prepare your yacht for winter storage.

If you are removing your yacht from the water for another reason, use the information in this section as a guideline. Following the procedures in this section will help extend the life of your yacht and its equipment and simplifies recommissioning in the spring.

Indoor storage is beneficial if you are storing your yacht in a climate that pro-

duces ice and snow. The storage building should be adequately ventilated and not tightly closed. Ventilation, both around and throughout the yacht, is very important to help prevent the growth of mold and mildew.

If you use outdoor storage facilities, cover your yacht with a cover having provisions for ventilation to keep the yacht from “sweating”. Building a frame over the boat to support the cover will allow the passage of air around the yacht. The frame should be a few inches wider than the yacht so the cover will extend beyond the rubrail. The frame should also support the center of the cover and cause it to rise in a slight “teepee” position to allow for water runoff.

NOTE: DO NOT seal the cabin tightly to allow proper ventilation throughout.

Before preparing your yacht for winter storage, thoroughly check the condition of the yacht and its systems and equipment. Note any repairs that may be needed. The need for additional repairs may become apparent during the winterization process. Make arrangements with your Silverton dealer to have the repairs completed.

Cleaning and Preparation For Storage

- ☐ Thoroughly clean the hull immediately after removing the yacht from the water. Pressure wash the bottom, if possible, to remove all marine growth. If pressure washing is not possible, thoroughly scrub the hull bottom. Marine growth is much easier to remove while it is still wet.
- ☐ Thoroughly clean the remainder of the hull and the deck. Silverton recommends a coat of wax be applied to the hull above

the waterline and to the deck for added winter protection.

- ☐ Apply rust inhibitor, such as *CRC*, to all metal parts.

☐ Thoroughly clean the inside of all hull openings, thru-hull fittings and filtration screens (See **Mechanical Layout** in the Schematics Section of this Owners Manual, which illustrates the location of the seawater intake valves). Inspect the hull and underwater gear for signs of wear, deterioration or damage and repair, if possible, before covering and storing your yacht.

☐ Fill the fuel tanks to prevent condensation and add a good quality fuel preservative (Refer to the fuel preservative manufacturer’s recommendation for the proper ratio).

IMPORTANT: DO NOT overfill the fuel tanks so fuel flows from the vent(s). Allow sufficient room in the tanks for fuel to expand.

☐ Prepare the engines for storage. Refer to the engine manual for winterization and storage procedures.

☐ Prepare the generator and air conditioners (if so equipped) for storage. Refer to the generator manual and the air conditioner manual, included with your owner’s packet, for the proper winterization and storage procedures.

Draining Your Yacht

Your yacht has drain plugs for draining water from the bilge (See **Mechanical Layout** in the Schematics Section of this Owners Manual, which illustrates the

location of the garboard drain plugs). Some compartments in the bilge may not drain completely due to the position of the yacht. Pump these compartments out with a portable pump and then use a sponge to remove all remaining water.

The procedure for draining and winterizing the fresh water system is as follows:

- ☐ Drain the fresh water supply tank by opening the hot and cold faucets in the galley for ten (10) minute intervals until the tank is empty.
- ☐ Open all faucets in the galley, both showers, both head sinks and the exterior cockpit shower.
- ☐ Remove the fresh water filter bowl and strainer. Clean, dry and replace strainer bowl.
- ☐ Drain the water heater and remove the cold water intake hose and hot water output hose and hook them together.
- ☐ Remove the inlet hose from the fresh water tank (See **Mechanical Layout** in the Schaematis Scetion of this Owners Manual, which illustrates the location of the fresh water tank) and insert it into a container of non-toxic, fresh water anti-freeze. Turn the fresh water pump ON and starting at the farthest faucet from the pump, turn ON all faucets until the anti-freeze flows out.
- ☐ Turn OFF the fresh water pump and reconnect the inlet hose to the fresh water tank.
- ☐ Pour non-toxic anti-freeze into all sink and shower drains until the liquid is discharged overboard.

Alternate procedure for draining and winterizing the fresh water system is as follows:

- ☐ Drain all water from the fresh water tank.
- ☐ Drain all water from the water heater.
- ☐ Remove hose from the input side of the fresh water pump and allow to completely drain.
- ☐ Remove hose from the output side of the fresh water pump and turn ON all faucets.
- ☐ Blow compressed air (15-20 lbs. psi) through the output hose until all water stops flowing from the faucets.
- ☐ Leave water lines at the fresh water pump disconnected to allow any trapped water vapor to drain and evaporate.

The procedure for draining and winterizing the marine sanitation system is as follows:

- ☐ Drain all water lines into the waste holding tank. Continue to flush fresh water into the waste holding tank and pump out into an approved waste facility until thoroughly clean.
- ☐ Add non-toxic, freshwater anti-freeze to the waste holding tank by flushing through the toilet.
- ☐ Run the macerator pump to allow anti-freeze to flow through the pump and the input/output lines.
- ☐ Remove the drain plug from the macerator seacock while the valve is closed and allow the line to drain. Replace the drain plug.

- ☐ Thoroughly clean the toilet and leave the bowl exposed to prevent mildew.
- ☐ Remove all seacock and strainer drain plugs to prevent from freezing. Close all seacocks.

Seacocks

- Engines
- Head System (Intake)
- Head System (Macerator pumpout)
- Generator
- Air Conditioners (if equipped)

Strainers

- Engines
- Fresh Water System
- Generator
- Air Conditioners (if equipped)

Battery Storage

The procedure for battery winterization and storage is as follows:

- ☐ Turn battery switch to OFF.
- ☐ Remove engine batteries and generator battery (if so equipped) from their respective compartments (See **Mechanical Layout** in the Schematics Section of this Owners Manual, which illustrates the location of the engine and generator batteries).
- ☐ Place batteries on a wooden pallet or bench and store in an area where temperatures remain above freezing.
IMPORTANT: DO NOT store batteries on a concrete surface, such as a garage floor, as they will tend to discharge.
- ☐ Keep batteries fully charged during storage. Periodic charging (once a month)

with a battery charger set on a low amperage charge is recommended. Check the battery electrolyte levels regularly. Add electrolyte, if needed.



Refer to the battery literature included with your owner's packet for additional information concerning the care and storage of your batteries

Interior Preparation

The procedure for preparing the interior of your yacht for winter storage is as follows:

- ☐ Remove all items that will hold moisture (towels, PFD's, blankets, clothing, canvas, etc.) from the interior of the yacht to prevent mold and mildew formation.
- ☐ Remove all electronic equipment and items of value that are detachable.
- ☐ Remove all garbage and trash.
- ☐ Thoroughly clean the interior of your yacht. Clean all cabinets, drawers and cupboards. Allow the cabin area to air dry for at least one day, if possible.
- ☐ Stand or prop up all mattresses and cushions that are to remain on board during storage to allow air circulation around them.
- ☐ Place *Mildew Pacs* in various locations within the interior of your yacht to help prevent mold and mildew formation during storage (Refer to the manufacturer's recommendation for the quantity and location required).

Lifting Your Yacht

The following are guidelines that will help prevent damage to your yacht as it is being lifted:

- * Never lift the yacht with a greater than normal accumulation of water in the bilge. All tanks containing fresh water should be empty.
- * Place lifting slings where indicated by the sling tab labels on the gunwales (See **Thru-hull Locations Layout-Port and Starboard** in the Schematics Section of this Owners Manual, which illustrates the location of the sling tab locations). Avoid placing slings where they may lift the propeller shaft or other underwater fittings. Padding, placed under the slings at the chine corners, will help to keep pressure to a minimum at this location.
- * Disconnect the propeller shafts at the transmissions to prevent damage to the transmissions and shafts.
- * Use wide, flat, lifting slings made of belting and spreader bars long enough to keep pressure off of the gunwales.



DO NOT use slings made of cable. Pressure caused by the slings on the gunwales can cause severe gelcoat crazing or more serious hull damage. The spreader bar at each lifting sling should be at least as long as the distance across the widest point the sling surrounds.

- * If a marine railway or platform hoist is being used, locate and adjust the blocking to distribute the weight over several areas.

The weight borne by the keel must not be so great as to cause crushing or distortion of the member.

- * When lifting the yacht, keep the bow higher than the stern so the engine and generator (if so equipped) exhaust lines can drain. This will prevent water from flowing forward through the manifold and into the engine itself, where it may become trapped.



Always keep the bow higher than the stern every time the yacht is lifted. DO NOT lift the stern higher than the bow at any time as this may cause water to enter the engines. Engine failure is possible if water enters the engine cylinders. The water can cause “hydrostatic lock” and bend the piston rods. “Hydrostatic lock” is a situation where the piston cannot travel to its full upward position due to the presence of a liquid above the piston and extreme pressure is forced downward as the piston moves upward. Even a small quantity of water can cause rust or other internal engine damage.

NOTE: Silverton recommends an optional storage cradle with the purchase of your yacht. The cradle is factory made to conform to the bottom of your yacht for safe storage and minimizes the risk of hull distortion.

OPERATING YOUR YACHT

Most people who purchase a Silverton yacht have boat handling knowledge and experience with other types of vessels. This section of the Owner's Manual provides basic information concerning the safe operation of your yacht and is a review of the information contained in each of the "Systems Sections". Be certain to read and have a thorough understanding of all systems described in this Owner's Manual **BEFORE** you operate your yacht. Even if you are an experienced yachtsman, you can benefit from reviewing the information contained in this section.

The first cruise on your new Silverton yacht should be a time for you to become acquainted with the vessel. Before you depart on your first cruise, you should be able to answer **YES** to the following questions:

- ✓ Has your Silverton dealer completed the "Pre-Delivery Service Inspection"?
- ✓ Have you and your Silverton dealer signed the "Pre-Delivery Service Record"?
- ✓ Have you completed and mailed all warranty registration cards?
- ✓ Have you read and do you have a complete understanding of this Owner's Manual and the O.E.M. Manuals included with your owner's packet?
- ✓ Does your yacht's safety equipment comply with all United States Coast Guard and local regulations?
- ✓ Is your safety equipment in operable condition and accessible, if needed?
- ✓ Has your Silverton dealer reviewed the operation of your yacht and its systems with you?
- ✓ Has your Silverton dealer answered all of your questions concerning the operation of your yacht and all of its systems?

If you have completed the above preliminary steps, you are ready to take your first cruise. Before you depart, give some thought to the cruise itself. Choose a calm day, if possible, and take only those people who will be members of your regular crew. Leave guests on shore, so that you are able to concentrate on learning as much as possible about your new Silverton yacht without unnecessary distractions.

Engine Startup Preparation

Make sure that you have read the Fuel Safety Checklist For Safe Boarding prior to your initial or first seasonal engine startup, and then follow the below listed procedures:

- ✓ Be certain all electrical circuit breaker switches are turned OFF.
- ✓ Raise the engine compartment access hatch and use your sense of smell to detect any fuel fumes.

If **ANY** fuel fumes are detected:

- ✓ Evacuate your yacht **IMMEDIATELY**.
- ✓ Notify the dockmaster.
- ✓ Open all hatches, doors and windows to provide natural ventilation.

- ✓ Have a qualified marine technician examine your yacht immediately to determine the source of the fuel fumes.
- ✓ If a leak is detected, have it repaired as soon as possible by a competent technician.
- ✓ If you do not detect any fuel fumes, open all hatches, doors and windows to ventilate your yacht.
- ✓ Visually examine the engines and generator(if so equipped) for any oil leaks. If leaks are noted, have them repaired by a competent technician.
- ✓ Examine the bilge area for water accumulation. Remove excess water and locate the source of the water. Remember, a small quantity of water in your bilge is normal.

Turn ON the following switches:

- ✓ Both battery switches.
- ✓ DC Electrical Panel main breaker switch.
- ✓ Helm electronics breaker switch.
- ✓ Helm accessory breaker switch.
- ✓ Visually examine the fire extinguisher system in the engine compartment to be certain it has not been discharged.
- ✓ Check the engine oil level. Refer to the Engine Manual for specific instructions concerning the proper oil level and filling procedure.
- ✓ Check the transmission fluid level. If the level is low, add fluid, but **DO NOT** overfill.

Be certain the fluid level is below the full mark on the dipstick when the transmission is cold. The fluid will expand as it warms and will overflow if the level is too high.

- ✓ Check the generator (if so equipped) oil level. Refer to the Generator Manual for specific instructions concerning the proper oil level and filling procedure.
- ✓ If your yacht is equipped with fresh water cooled engines, remove the pressure cap from the heat exchangers and check that the coolant is filled to the neck of the filler tube. If coolant is low, refer to the Engine Manual for proper filling instructions.
- ✓ If your yacht is equipped with diesel engines, refer to the Engine Manual for the proper procedure for checking the coolant level and the proper antifreeze/water ratio.
- ✓ Open both raw water intake valves. The valves are in the open position when the handle is parallel to the valve body.
- ✓ Remove raw water strainer cap and check for debris. Remove any debris noted.
- ✓ If your yacht is equipped with a generator, be certain there is no debris in the water strainer. Remove any debris noted.
- ✓ Examine the propeller shaft stuffing boxes for excessive water leakage. One drop of water every sixty (60) seconds is normal.
- ✓ Open the fuel shutoff valves for the engines and generator. The valve is in the open position when the handle is parallel to the valve body.

✓ Check the oil level in the trim tab reservoir and be certain the level is between the FULL and ADD marks.

Engine Startup

IMPORTANT: Always be very careful when starting your engines. Use common sense and good judgement. Turn OFF the engine(s) immediately if you observe any unsafe operating condition.

The below listed procedures should be followed when starting your engines:

- ✓ Operate the bilge blower motors for five(5) minutes before starting your engines.
- ✓ Place shift control levers in the neutral position.
- ✓ Place throttle control levers in the “down” position.
- ✓ Turn ignition switch to ON, but not to START. Be certain the engine oil pressure alarm sounds and the Automatic Fire Extinguisher System indicator light is ON.
- ✓ Turn ignition switch to START and hold until the engine starts. Release the ignition switch immediately after the engine starts. If the starter motor does not operate when you turn the ignition switch to START, the neutral safety switch may be out of adjustment. Carefully move the shift control lever up and down slowly until the starter motor operates. Have a competent technician adjust the neutral safety switch as soon as possible.

CAUTION

If the engine fails to start within thirty(30) seconds, release the ignition switch. Allow the starter motor to cool for at least sixty(60) seconds and then try again to start the engine. Prolonged starting attempts may result in starter motor overheating and damage.

CAUTION

Failure to release the ignition switch from the START position after the engine starts may result in serious damage to the starter motor and/or engine flywheel.

- ✓ If one of the batteries is not sufficiently charged to start the engine, start the engine with the fully charged battery first. Start the other engine using the “Parallel Start” switch, which draws power from both batteries. Release the parallel start switch immediately after the engine starts.

CAUTION

DO NOT continue to depress the “Parallel Start Switch” after the engine has started. Damage to the alternator(s) may result.

- ✓ Be certain the oil pressure is between 30 and 50 psi(gasoline engines) or 35 and 70 psi(diesel engines). If the oil pressure is low, turn OFF the respective engine immediately.
- ✓ Allow the engines to operate at the

recommended RPM's as specified in the Engine Manual until they reach normal operating temperature. Normal operating temperature for gasoline engines equipped with a fresh water cooling system is 170° F and if equipped with a raw water cooling system, 140° F. Normal operating temperature for diesel engines is between 170° F and 190° F.

- ✓ Check for water discharging from the exhaust outlets. The presence of water indicates water circulation in the exhaust cooling system. Water should discharge through the exhaust outlets immediately after the engine starts.
- ✓ After engines reach their normal operating temperature, increase the RPM's to 2000. Be certain the voltmeters read between 13 and 14.5 volts.
- ✓ Visually inspect the exhaust system for leaks. If any leaks are detected, immediately turn OFF the respective engine and contact a competent technician for repair.
- ✓ Check the transmission fluid level after the engine is warm. The transmission should be in neutral and the engines operating at idle speed. Transmission fluid should be at or slightly below the FULL mark on the dipstick. Add transmission fluid if the level is low, but **DO NOT** overfill.

Shakedown Cruise

Silverton recommends a shakedown cruise after the initial or seasonal startup. This will test the engines and various systems under normal operating conditions. Note any condition that does not meet normal operating performance standards. Repair any condition noted as soon as possible.

IMPORTANT: Before fueling your yacht, be certain you have read and have a thorough understanding of the information contained in the **"Fuel System" Section** of this Owner's Manual. It contains valuable information and cautions for your safety and the safety of your passengers.

Check the following for proper operation during your shakedown cruise:

- ☐ **Air Conditioner(s):** If your yacht is equipped with an air conditioning system, be certain each air conditioner is operating properly.
- ☐ **Engines:** Be certain both engines are capable of obtaining their maximum RPM range. Check for fuel, oil and water leaks. Check the exhaust system for leaks.
- ☐ **Generator:** If your yacht is equipped with a generator, be certain it starts and operates properly. Check for oil, water and exhaust system leaks.
- ☐ **Instruments:** Be certain that all instruments operate properly and provide normal readings.
- ☐ **Steering:** Check that the steering system is responsive.

☐ **Shift and Throttle Controls:** Be certain the shift and throttle controls operate properly and are in the proper adjustment.

☐ **Transmissions:** Check that both transmissions shift smoothly and positively.

☐ **Trim Tabs:** Check that the trim tabs operate properly and are responsive to your use of the controls.

After completing your shakedown cruise, recheck all fluid levels. Check all drive belts for the proper tension. Generally examine all components to be certain they did not loosen during the cruise. Make all adjustments as necessary.



DO NOT remove the cooling system filler cap when the engine is hot. Allow the engine to cool and then remove the pressure cap slowly, allowing the pressure to vent. Hot coolant, under pressure, may discharge violently and result in serious personal injury and burns.

Getting Underway

After your engines have warmed to normal operating temperature, you are ready to depart your dock/mooring. Check the wind, tide and current to determine the best way to safely maneuver your yacht away from the dock. Cast off all mooring lines.

Shift the transmissions into forward or reverse, depending on which way you want to depart your dock. Your engines should be at idle speed while departing your dock and power should only be used if necessary for control of your yacht.

Once your yacht has departed the dock and is in open water, accelerate to cruising speed(RPM's) as recommended in the Engine Manual.

Be certain to follow all safety precautions as mentioned in the "Boating Safety" Section of this Owner's Manual while operating your yacht.

Daily Engine Shutdown

After you have completed your cruise and secured your yacht to the dock, shut down the engines in the following manner:

☐ Reduce engine speed to idle.

☐ Place transmission controls in neutral.

☐ Allow engines to operate at idle speed for several minutes.

☐ Turn ignition switches to the OFF position to shut down the engines.

☐ Operate the bilge blower motors for several minutes to circulate fresh air through the engine compartment.

☐ Turn OFF battery switches.

SIXTEEN WAYS TO REDUCE FUEL CONSUMPTION

1. Keep the bottom of your yacht clean. A fouled bottom can increase drag up to 10% or more. A 10% increase in drag is equivalent to a 10% increase in fuel consumption.

2. **DO NOT** idle your engines needlessly. Depart your dock/mooring after warm-up.

3. Watch your trim. A well balanced yacht gets on plane faster, handles better and runs with less surface contact.

4. Navigate better. By plotting courses to your destination instead of just waiting for them to appear somewhere in front of you, you can eliminate miles off of your distance and gallons off of your fuel consumption.

5. Know your fuel consumption. By plotting a fuel consumption/RPM curve for your yacht, you will probably find that reducing your engines' RPM's 10% can often reduce your fuel consumption 30% with only a slight reduction in speed.

6. Remove extra weight. If you are not going to use it, do not carry it aboard. Any extra weight requires more fuel to move your yacht. Do not just stop at the lockers. Remember that water weighs 64 pounds per cubic foot, so keep the bilge areas dry.

7. Improve your yacht handling ability. **DO NOT** let the yacht labor along below a planing attitude. This is the absolute peak of fuel waste.

8. Purchase good quality fuel. Be certain

you are using the correct fuel for your engine.

9. Load your yacht correctly. **DO NOT** put all of the heavy gear, such as anchors, chain, canned goods and spare parts exclusively in either the bow or stern. Heavy items should be placed amidships where they will not affect the trim and plane of the yacht.

10. Check the drive train. An inboard engine that is improperly aligned can cost you money. Check to see if the transmission has sufficient fluid (too little increases friction), if the stuffing box is too tight (increases the load on the engine) or if a bent rudder or propeller are robbing you of economy. Be certain the rudders are properly aligned.

11. Check the engine cylinder compression. Low compression indicates worn piston rings or valves which will consume oil and reduce engine power.

12. Check the engine idle speed. For the times it is necessary to operate at idle speed, be certain the engine is not running too fast and using unnecessary fuel.

13. Check the engine operating temperature. Compare your normal operating temperature with the range specified in the Engine Manual and in this Owner's Manual. An overheating engine will cause excessive wear and will be less efficient.

14. Keep the engine and transmission oil clean. Dirty oil causes varnish to form on the moving surfaces of the engine/transmission. Varnish can cut into the piston ring seal and contribute to fuel waste. Varnish will cause the transmission to "slip".

15. Check for engine air leaks. A leak in the engine intake manifold disturbs the air/fuel mixture and reduces your performance. A leak in the exhaust manifold is DANGEROUS. Carbon Monoxide Gas (CO) could enter the cabin area of your yacht.



Carbon Monoxide Gas(CO) is colorless, odorless and tasteless. It is highly poisonous, endangering lives even at very low levels of concentration. Mild exposure causes headaches and fatigue, often resembling “flu-like” symptoms. Medium exposure causes severe headaches, drowsiness, nausea and rapid heart rate. Extreme exposure results in unconsciousness, convulsions, cardiorespiratory failure and death. If Carbon Monoxide Gas(CO) is detected in your yacht, immediately contact a qualified technician to locate and repair the source of the poisonous gas. DO NOT enter your yacht until repairs have been made and the Carbon Monoxide Gas(CO) is lowered to an acceptable level.

16. Keep hot water use to a minimum. The less hot water you use, the less time your generator will have to run, resulting in lower fuel consumption.

GLOSSARY

ABAFT: Toward the rear of the yacht.

ABEAM: At right angles to the yacht's keel.

ABOARD: On the yacht.

ABREAST: Side by side.

ADRIFT: Loose. Not on a mooring or tow line.

AGROUND: Stuck fast on the bottom.

AHEAD: In a forward motion.

Amidships: (1) The area midway between the bow and the stern of the yacht. (2) The area between the Port and Starboard side of the yacht.

AMPERE: The standard unit to measure the strength of electrical current.

ASTERN: (1) In the rear area of the yacht. (2) Direction of travel when the yacht moves in reverse.

ATHWARTSHIP: Movement from Port to Starboard or Starboard to Port.

BEAM: (1) The widest distance across the yacht. (2) A transverse structural member that stiffens and supports a portion of the deck.

BILGE: The interior area of the hull below the waterline.

BILGE PUMP: A pump used to remove

water that has drained into the yacht's bilge.

BOW: The forward end of the yacht.

BOW LINE: A docking line leading from the yacht's bow.

BULKHEADS: The interior walls of the yacht.

CAST OFF: Let go.

CHINE: The point where the bottom and side of the hull meet.

CHOCK: A fitting or hole through a yacht's deck through which a mooring or anchor line is routed.

CIRCUIT BREAKER: A device used to interrupt an electrical current when the current flow exceeds a predetermined level.

CLEAT: A fitting on a yacht's deck on which a mooring or anchor line is tied.

COCKPIT: An exposed aft deck area substantially lower than the forward adjacent deck.

COMPANIONWAY: The steps or ladder leading from the deck to the cabin of the yacht.

COMPARTMENTS: Rooms or spaces divided by bulkheads.

CRADLE: A wooden framework used to support a yacht when it is on land.

CURRENT: The movement of water.

DEAD AHEAD: Directly in front of the yacht.

DINGY: A small open boat used for ship to shore transportation.

DISPLACEMENT: The weight of the water displaced by the yacht's hull.

DRAFT: (1) The depth of a yacht from the actual waterline to the bottom of the lowest part, such as the propeller tip or rudder. (2) The depth of water necessary to float a yacht.

EVEN KEEL: To be floating evenly without listing to either side.

EXHAUST SYSTEM: The means by which the hot engine or generator gases are removed from the engine and released into the atmosphere.

FATHOM: Six (6) feet.

FENDER: A rubber or plastic device used to absorb impact between vessels or a vessel and a dock.

FLARE: (1) Outward curve of the hull as it rises up the side from the waterline. (2) A pyrotechnic device used for emergency signaling.

FLOTSAM: Refuse that floats when discharged overboard. See "Jetsam".

FLYING BRIDGE: The uppermost steering station from which a yacht is controlled.

FORE-AND-AFT: A line, or anything else, that runs parallel to the longitudinal center of the yacht.

FORWARD: Toward the bow of the yacht.

FREEBOARD: The vertical distance from the waterline to the sheerline (rubrail).

GALLEY: The kitchen area of the yacht.

GASKET: A strip of sealing material used to make joints fluid tight.

GELCOAT: The thin outer layer of pigmented plastic-like substance used to cover exposed fiberglass components.

GLAND: The moveable part of the stuffing box which compresses the packing when tightened (also referred to as the "packing gland").

GROUND: (Electrical) The electrical potential of the earth's surface, which is zero.

GUNWALE: The horizontal surface of the deck immediately above where it meets the hull.

HATCHES: Covers the openings in a deck or floor.

HATCHWAY: Access port through the deck.

HARDTOP: A permanent cover over the cabin or cockpit.

HAWSER: A heavy rope used for mooring or towing.

HEAD: A toilet or bathroom.

HEADING: The direction that a vessel is travelling with reference to true, magnetic or compass north.

HEADWAY: The forward motion of a vessel through the water.

HEEL: To tip or tilt to one side by means of an external force.

HELMSMAN: The person steering the yacht.

HULL: The main body of the yacht.

INBOARD: (1) From either the Port or Starboard side to the centerline of the yacht. (2) The dock side of a moored yacht.

JETSAM: Refuse that sinks when discharged overboard. See "Flotsam".

KEEL: The centerline of a yacht running fore and aft at the lowest point of the hull.

KNOT: (1) A Maritime unit of speed equal to 1.15 miles per hour. (2) A term for hitches and bends in a line of rope.

LAZARETTE: Storage compartments below the deck at the stern of the yacht.

LIST: A vessel that inclines to Port or Starboard by its own means.

LONGITUDINAL: Lengthwise.

MOORING: An arrangement for securing a yacht to a mooring buoy or pier.

NAVIGATIONAL LIGHTS: A set of red, green and white lights which indicate the presence of a vessel and must be illuminated between the hours of dusk and dawn and during times of restricted visibility (fog, rain, snow, etc.).

OVERHEAD: The ceiling or roof of a yacht.

OUTBOARD: (1) From the centerline of a yacht to the Port and Starboard sides. (2) The seaward side of a moored yacht.

PASSAGEWAY: A corridor or hallway aboard ship.

PERSONAL FLOTATION DEVICE (PFD): Life preserver or life vest.

PIER: A loading platform that extends at an angle from the shore.

PILING: Support or protection for wharfs, piers, etc.

PITCH: (1) The vertical motion of a yacht in a seaway about the athwartship axis. (2) The axial advance in inches of a propeller during one complete revolution.

PLANING HULL: At slow speeds, a planing hull will displace water in the same manner as a displacement hull. As speed increases, the hull provides a lifting effect up onto the surface of the water.

PORT: (1) Looking forward, the left side of a yacht from bow to stern. (2) A harbor.

PORT BEAM: The left center of a yacht.

PORT BOW: Looking forward, the front, left side of the bow.

PORT QUARTER: Looking forward, the left rear section of a yacht.

QUARTER: The sides of a yacht aft of amidships.

QUARTERING SEA: Sea (waves) coming from a yacht's quarter.

RODE: The anchor line or chain.

RUNNING LIGHTS: Refer to "Navigational Lights".

RUDDER: A vertical plate used to steer the yacht.

SALON: The main social cabin of a yacht.

SCREW: A propeller.

SCUPPER: A drain from the edge of the deck or cockpit that discharges overboard.

SEACOCK: A positive action shut-off valve connected directly to the hull seawater intake valve.

SHAFT: The long round member that connects the transmission to the propeller.

SHAFT LOG: A fitting at the hull bottom where the propeller shaft penetrates the hull. The shaft log permits rotation of the shaft while simultaneously preventing water from entering the hull.

SHEER: The top of the hull from bow to stern. The point where the hull meets the deck.

SHEER STRAKE: The upper edge of the hull immediately below the deck.

SOLE: Term used to refer to the cockpit floor or floor of the cabin.

SPRING LINE: A pivot line used in docking or to prevent the yacht from moving forward or astern while made fast to a dock.

STARBOARD: Looking forward, the right side of a yacht from bow to stern.

STARBOARD BOW: Looking forward, the front, right side of the bow.

STARBOARD QUARTER: Looking forward, the right rear section of a yacht.

STEM: The leading edge of a yacht's hull.

STERN: The rear of a yacht.

STRINGER: A fore and aft continuous member located in the bottom of the hull used to provide longitudinal strength.

STRUT: A propeller shaft support that is below the hull. The main strut is a large strut that is mounted immediately forward of the propeller. An intermediate strut is smaller than the main strut and is mounted between the main strut and the shaft log.

SUMP: A pit or well into which water is drained.

SUPERSTRUCTURE: A flying bridge or other structure that extends above the deck.

TOPSIDE: To go to the uppermost deck.

TRANSOM: The stern cross section of a yacht.

UNDERWAY: A vessel that is not moored, docked, at anchor or aground.

V-BOTTOM: A hull with the bottom section that is in the shape of a "V".

V-DRIVE: A drive system that has the output of the engine facing forward and is coupled to a transmission, which then changes the output aft.



WATERLINE: The line of water on the hull when the boat is afloat and at rest.

WEATHER DECK: A deck with no overhead protection.

WINDLASS: A device used to raise and lower an anchor.


Warning Labels

The following Warning labels appear at various locations on your 42 Convertible and are self-explanatory. Be certain to familiarize yourself and your passengers with these warning labels and their contents.

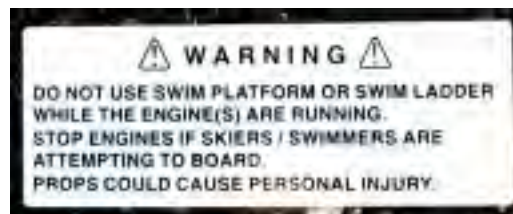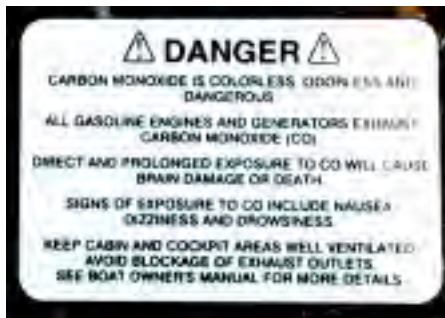

Identification Labels

The following labels identify the location or operating procedure of certain items on your 42 Convertible that are designed to assist you and increase your yachting pleasure.

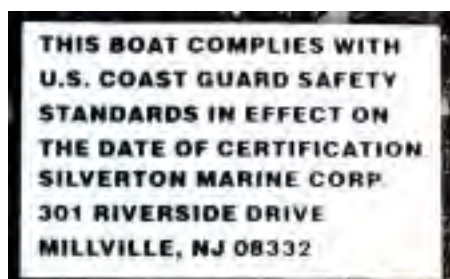

MAINTENANCE LOG

[illegible]

MAINTENANCE LOG

[illegible]

BOAT RECORD

The Boat Record is provided to record information about the yacht and its components. This record should be filled out by the selling Dealer at the time of delivery.

Owner's Name _____ Phone (____) _____

Address _____

Dealer _____ Phone (____) _____

Address _____

Boat Name _____ Hull Number* US STN _____

Delivery Date ____/____/____ Registration Number _____

Length _____ Beam _____ Draft _____

Approx. Displacement _____ lbs.

Approx. Height Above Waterline _____

DOCKSIDE INFORMATION

Fuel Capacity _____ Fuel Type _____ Fuel Filter _____

Engine Oil Type _____ Oil Filter _____

Generator Oil Type _____ Oil Filter _____

Transmission Oil Type _____ Oil Filter _____

ENGINE AND TRANSMISSION

Engine Mfr. _____ Model _____

Engine Serial no. Port _____ Stbd. _____

Transmission Mfr. _____ Model _____

Transmission Serial No. Port _____ Stbd. _____

GENERATOR

Manufacturer _____ Model No. _____ Serial No. _____

PROPELLER AND SHAFTS

Propeller Mfr. _____ Model _____

No. Blades _____ Bore _____ Diameter _____ Pitch _____ Cupped _____

Shaft Length _____ Diameter _____

BATTERIES

Battery Mfr. _____ Model _____

Rating: Engine _____ Generator _____

* The Hull Identification Number is located on the outside of the transom, on the starboard side, upper corner.

Note: The following is provided for your use in recording electronic equipment which you may add to your yacht. All equipment should be recorded so that the information is available in case of repair or for any insurance claim.

Electronic Equipment

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____

Manufacturer _____ Model no. _____ Serial no. _____


Item: _____

Manufacturer _____ Model no. _____ Serial no. _____

Item: _____


Manufacturer _____ Model no. _____ Serial no. _____

D.C MAIN PANEL D.C FEEDS / BILGE PUMPS 43 MOTORYACHT

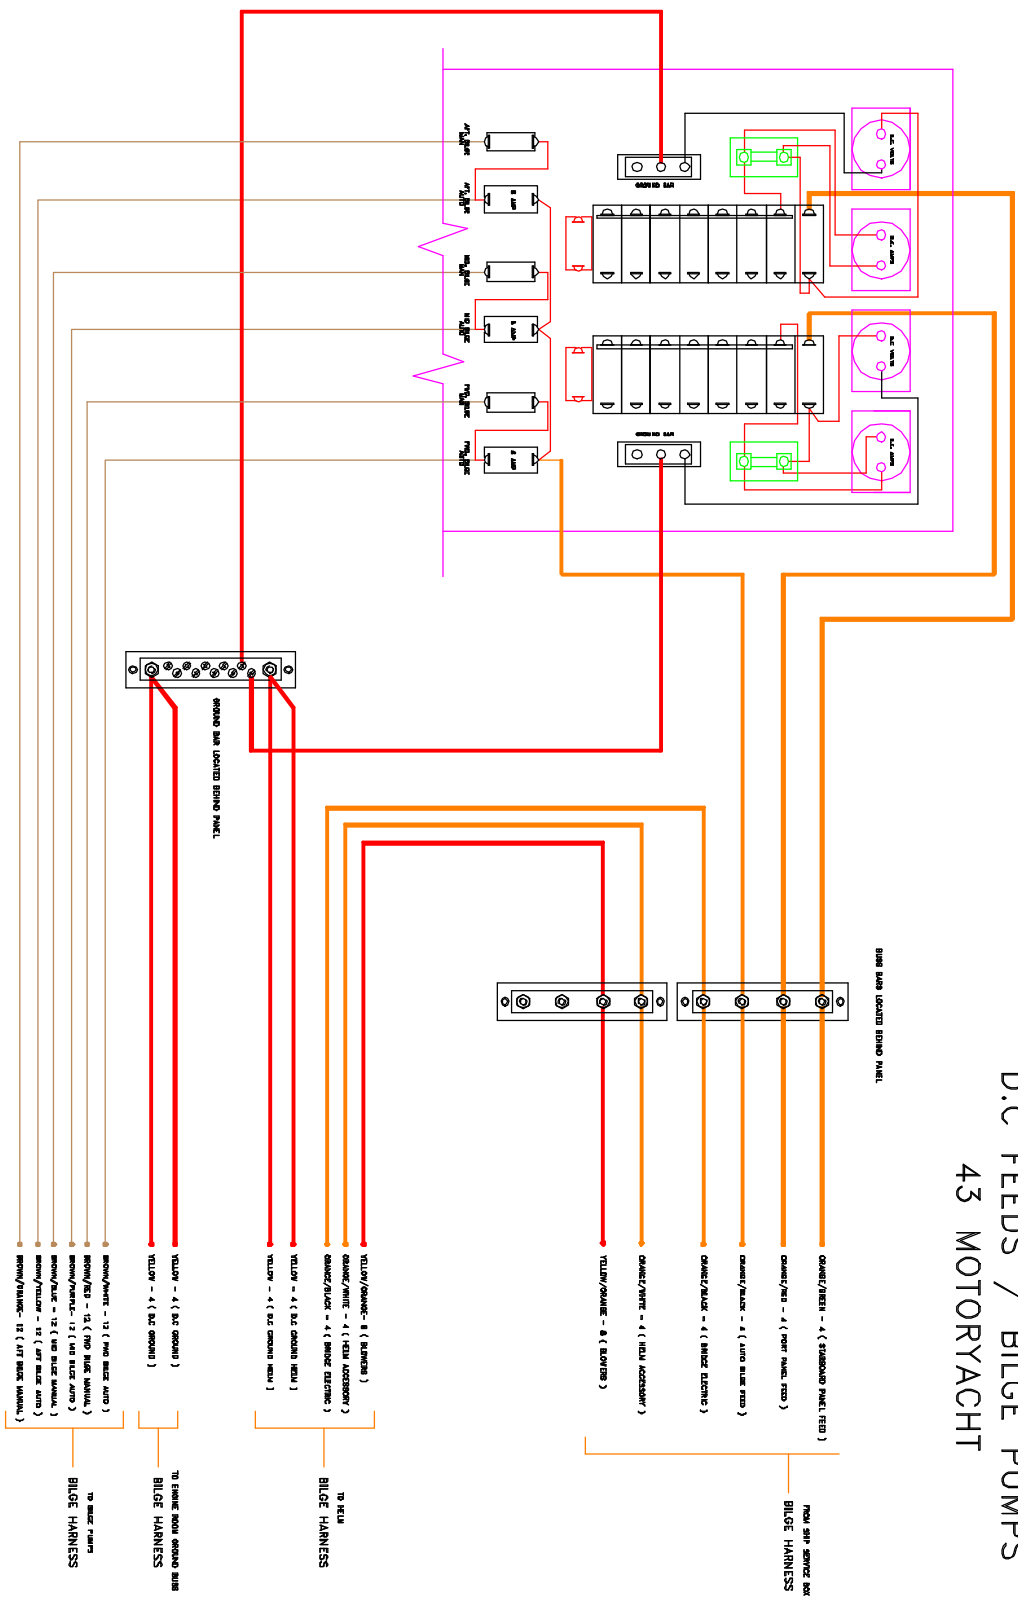

BATTERY 1 LOAD DETAIL


43 MOTORYACHT

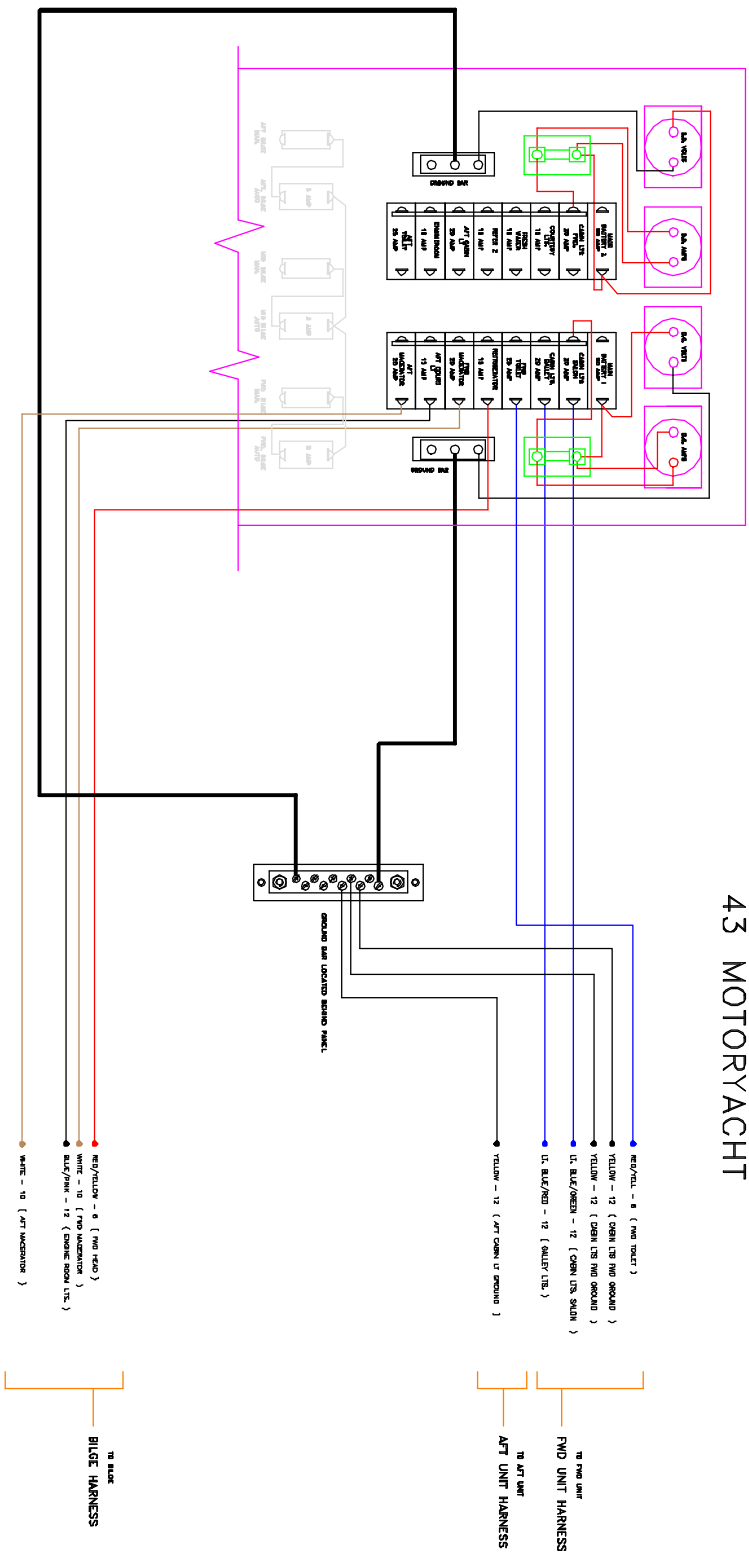


[illegible]


- LT, BLUE/RED - 12 (CABIN LIT.)
- BLUE/GREEN - 12 (FWD INTERIOR COCKPIT LIT.)
- RED/BLACK - 10 (REFRIGERATOR D.C.)
- YELLOW - 12 (CABIN LIT. FWD GROUND)
- YELLOW - 12 (FWD INTERIOR COCKPIT LIT. GROUND)

- RED/ORANGE - 6 (AFT HEAD)
- BROWN - 12 (FRESH WATER PUMP)
- BROWN/BLACK - 12 (AFT SHOWER BLAMP)
- BLUE/PINK - 12 (ENGINE ROOM UT'S)

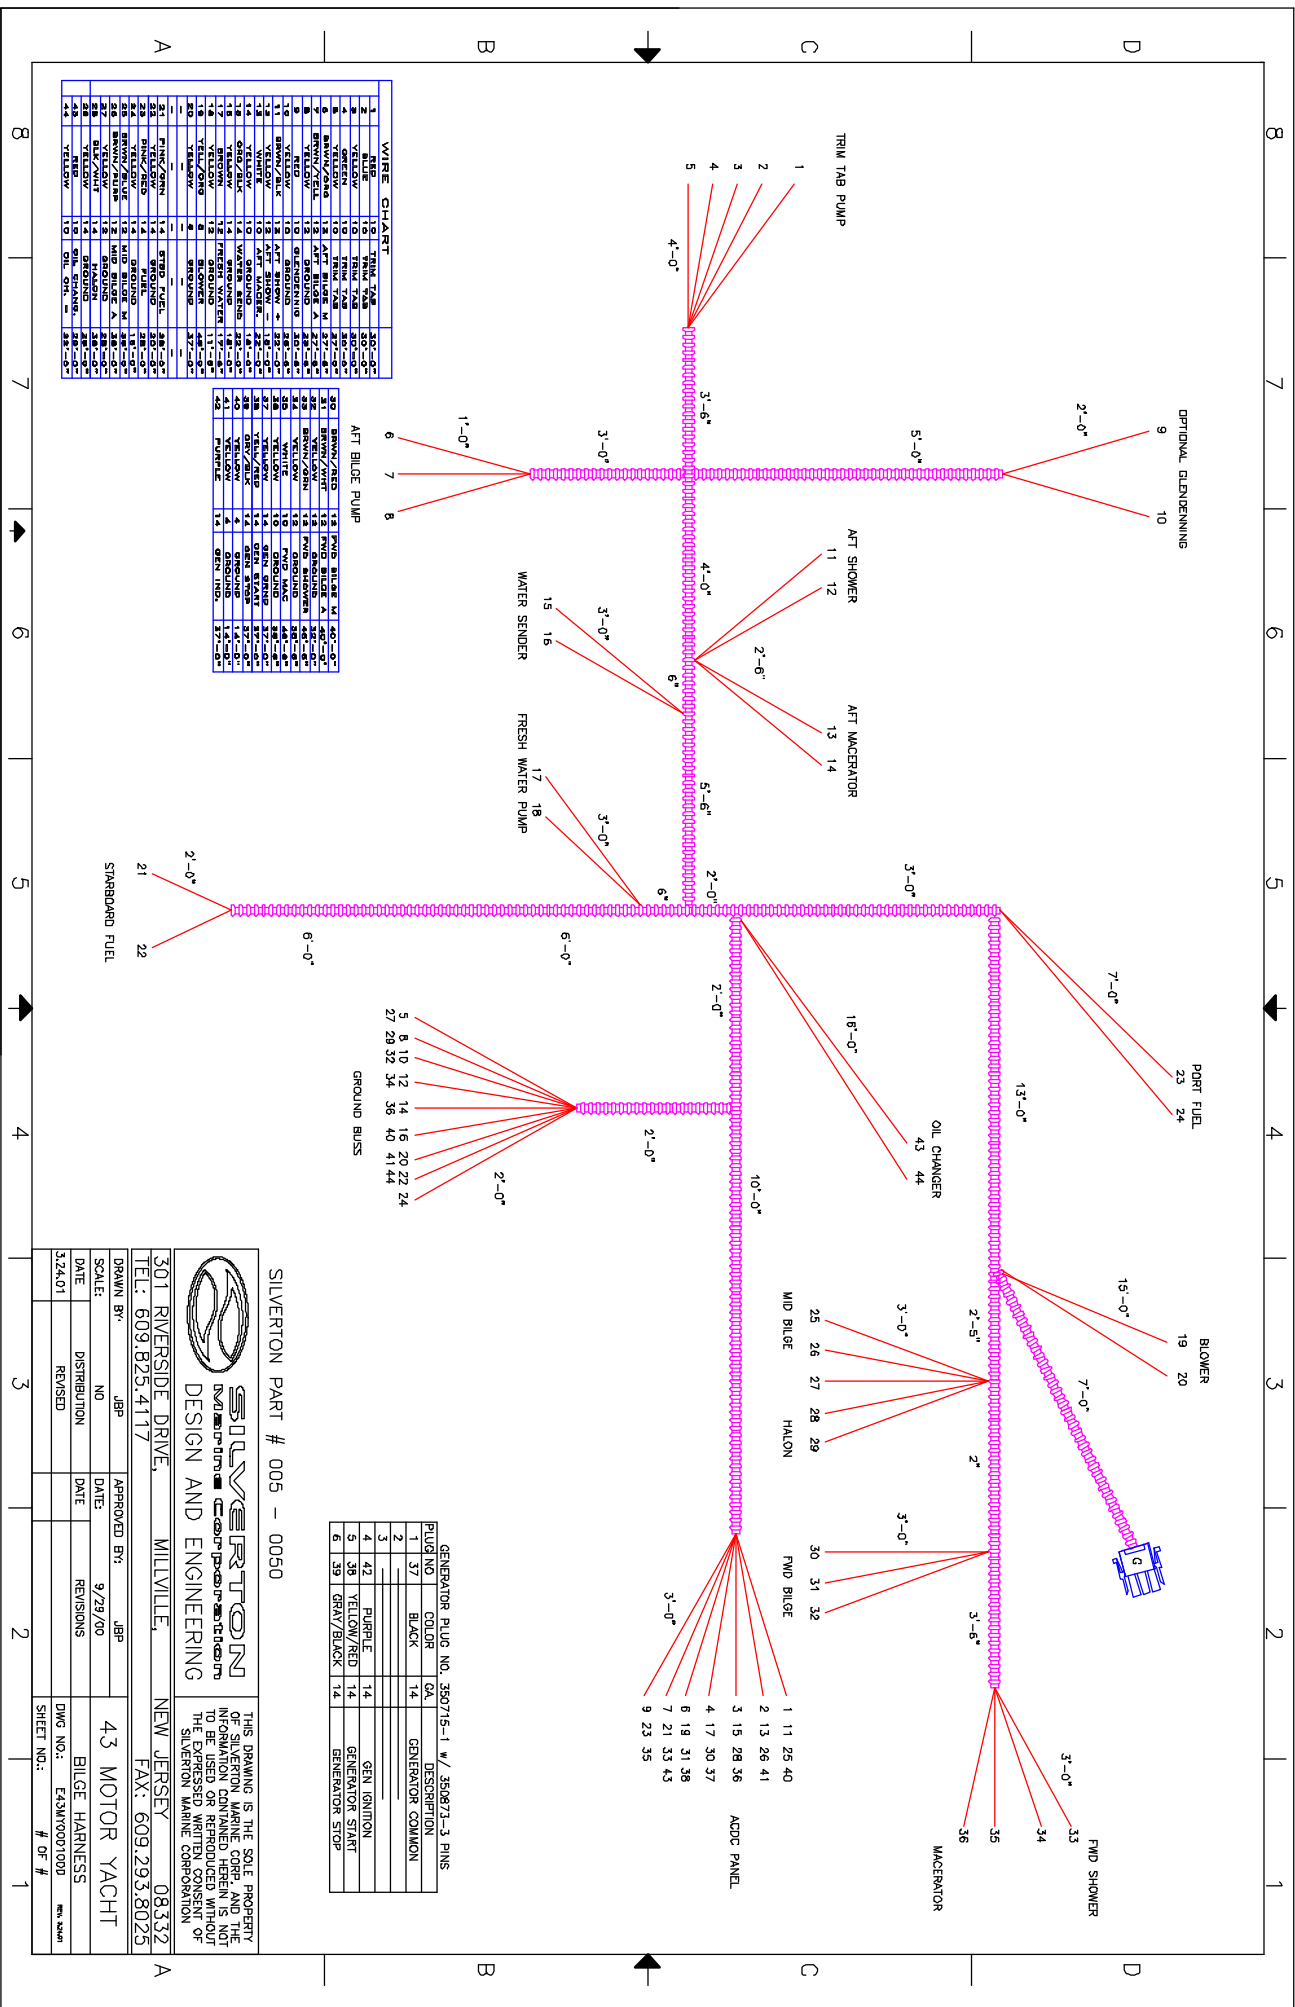

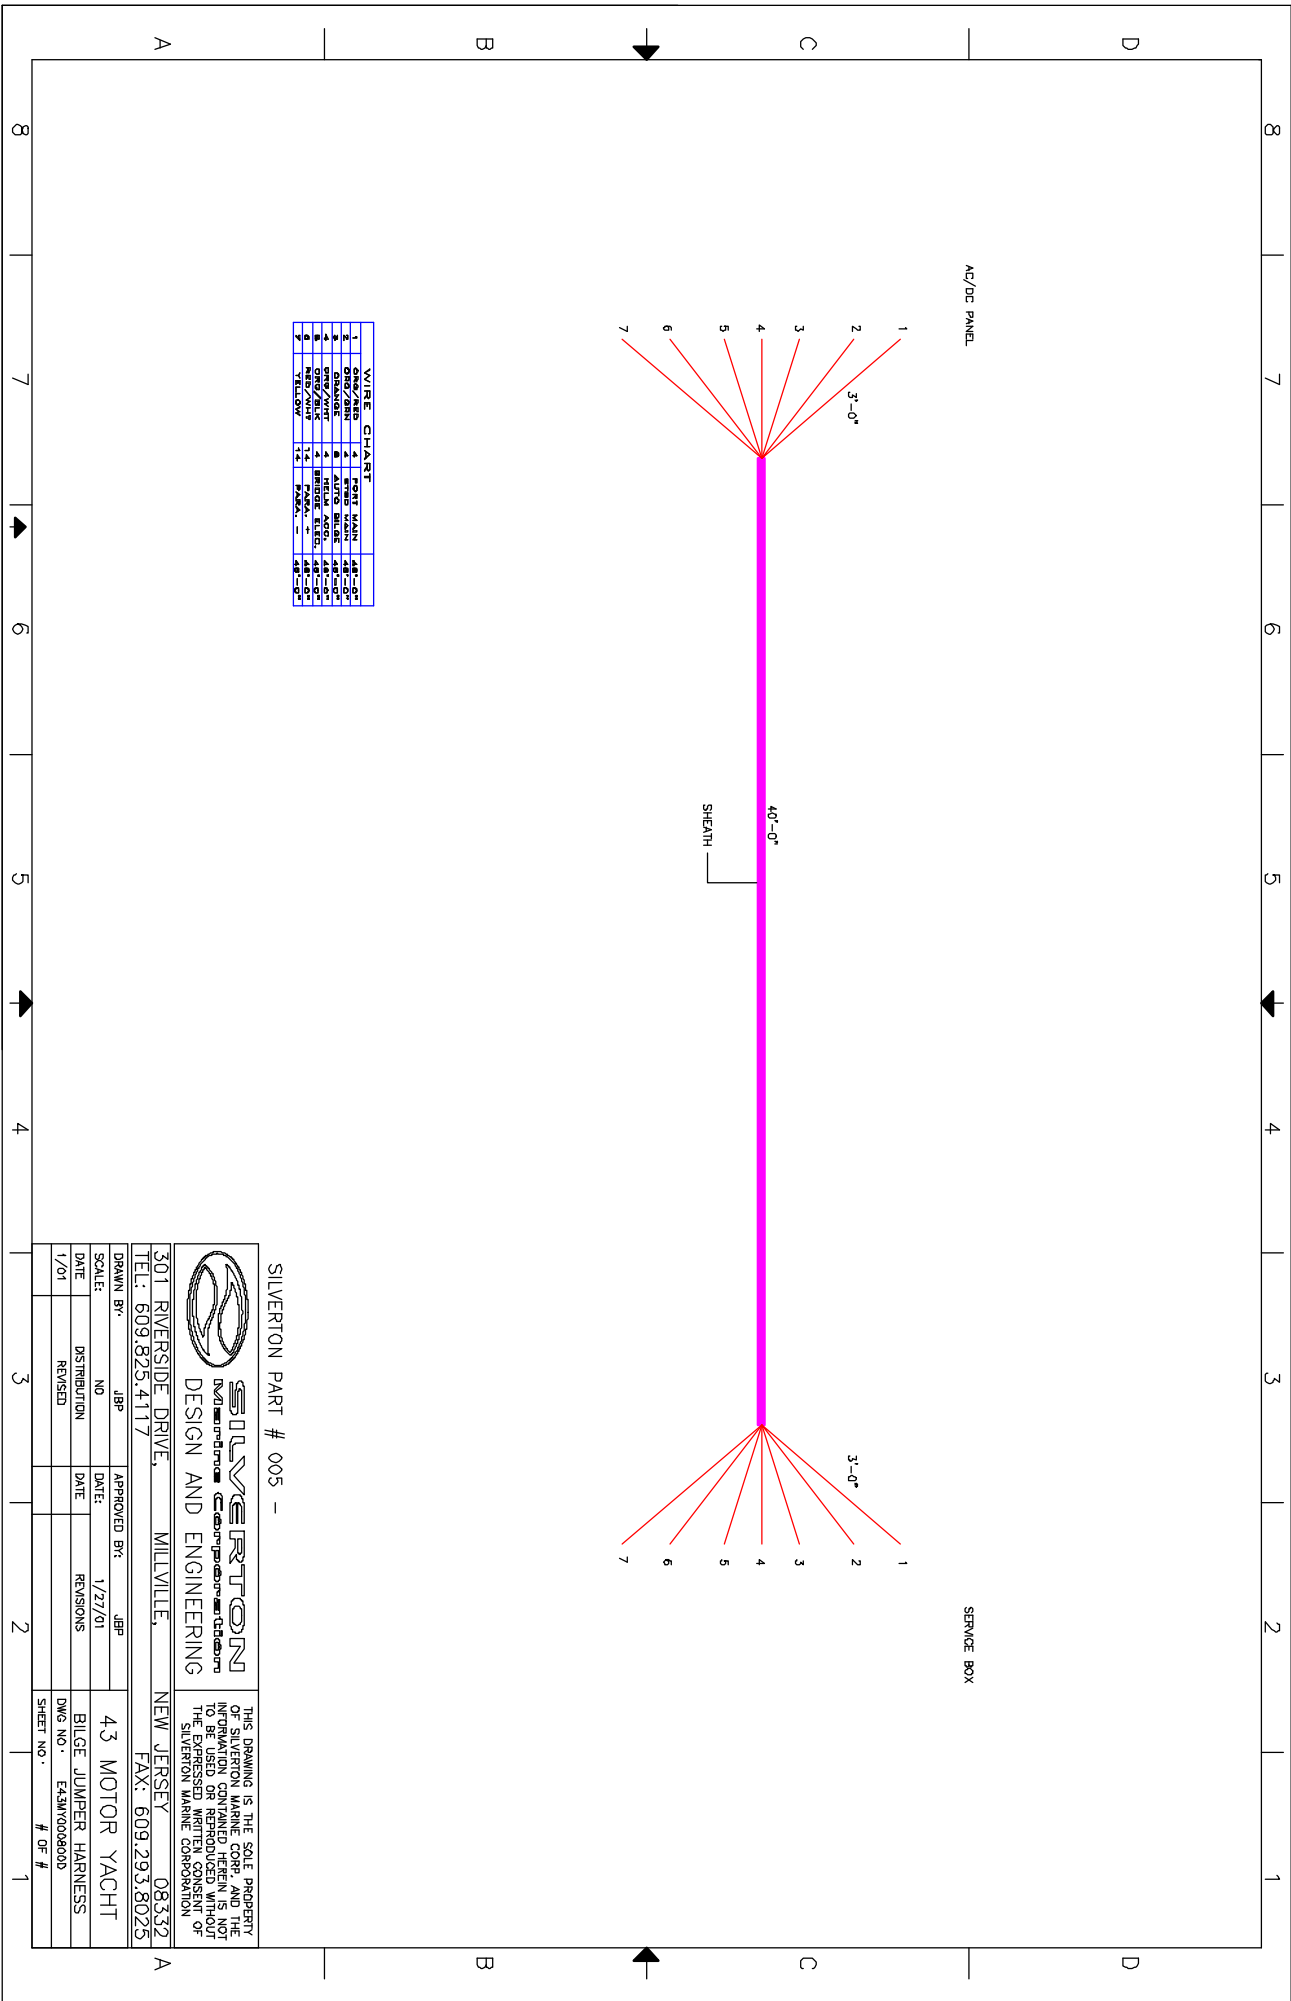

WIRE CHART			
1	CHARGE	4	PORT MAIN
2	CHARGE	5	PORT MAIN
3	CHARGE	6	AUXILIARY
4	CHARGE	7	CHARGE
5	CHARGE	8	CHARGE
6	CHARGE	9	CHARGE
7	CHARGE	10	CHARGE
8	CHARGE	11	CHARGE
9	CHARGE	12	CHARGE
10	CHARGE	13	CHARGE
11	CHARGE	14	CHARGE
12	CHARGE	15	CHARGE
13	CHARGE	16	CHARGE
14	CHARGE	17	CHARGE
15	CHARGE	18	CHARGE
16	CHARGE	19	CHARGE
17	CHARGE	20	CHARGE
18	CHARGE	21	CHARGE
19	CHARGE	22	CHARGE
20	CHARGE	23	CHARGE
21	CHARGE	24	CHARGE
22	CHARGE	25	CHARGE
23	CHARGE	26	CHARGE
24	CHARGE	27	CHARGE
25	CHARGE	28	CHARGE
26	CHARGE	29	CHARGE
27	CHARGE	30	CHARGE
28	CHARGE	31	CHARGE
29	CHARGE	32	CHARGE
30	CHARGE	33	CHARGE
31	CHARGE	34	CHARGE
32	CHARGE	35	CHARGE
33	CHARGE	36	CHARGE
34	CHARGE	37	CHARGE
35	CHARGE	38	CHARGE
36	CHARGE	39	CHARGE
37	CHARGE	40	CHARGE
38	CHARGE	41	CHARGE
39	CHARGE	42	CHARGE
40	CHARGE	43	CHARGE
41	CHARGE	44	CHARGE
42	CHARGE	45	CHARGE
43	CHARGE	46	CHARGE
44	CHARGE	47	CHARGE
45	CHARGE	48	CHARGE
46	CHARGE	49	CHARGE
47	CHARGE	50	CHARGE
48	CHARGE	51	CHARGE
49	CHARGE	52	CHARGE
50	CHARGE	53	CHARGE
51	CHARGE	54	CHARGE
52	CHARGE	55	CHARGE
53	CHARGE	56	CHARGE
54	CHARGE	57	CHARGE
55	CHARGE	58	CHARGE
56	CHARGE	59	CHARGE
57	CHARGE	60	CHARGE
58	CHARGE	61	CHARGE
59	CHARGE	62	CHARGE
60	CHARGE	63	CHARGE
61	CHARGE	64	CHARGE
62	CHARGE	65	CHARGE
63	CHARGE	66	CHARGE
64	CHARGE	67	CHARGE
65	CHARGE	68	CHARGE
66	CHARGE	69	CHARGE
67	CHARGE	70	CHARGE
68	CHARGE	71	CHARGE
69	CHARGE	72	CHARGE
70	CHARGE	73	CHARGE
71	CHARGE	74	CHARGE
72	CHARGE	75	CHARGE
73	CHARGE	76	CHARGE
74	CHARGE	77	CHARGE
75	CHARGE	78	CHARGE
76	CHARGE	79	CHARGE
77	CHARGE	80	CHARGE
78	CHARGE	81	CHARGE
79	CHARGE	82	CHARGE
80	CHARGE	83	CHARGE
81	CHARGE	84	CHARGE
82	CHARGE	85	CHARGE
83	CHARGE	86	CHARGE
84	CHARGE	87	CHARGE
85	CHARGE	88	CHARGE
86	CHARGE	89	CHARGE
87	CHARGE	90	CHARGE
88	CHARGE	91	CHARGE
89	CHARGE	92	CHARGE
90	CHARGE	93	CHARGE
91	CHARGE	94	CHARGE
92	CHARGE	95	CHARGE
93	CHARGE	96	CHARGE
94	CHARGE	97	CHARGE
95	CHARGE	98	CHARGE
96	CHARGE	99	CHARGE
97	CHARGE	100	CHARGE




SILVERTON
DESIGN AND ENGINEERING

301 RIVERSIDE DRIVE,
TEL: 609.825.4117

MILVILLE,
NEW JERSEY 08332
FAX: 609.293.8025

THIS DRAWING IS THE SOLE PROPERTY
OF SILVERTON MARINE CORP. AND THE
INFORMATION CONTAINED HEREIN IS NOT
TO BE USED OR REPRODUCED WITHOUT
THE EXPRESSED WRITTEN CONSENT
OF SILVERTON MARINE CORPORATION

DRAWN BY:	JBP	APPROVED BY:	JBP	43 MOTOR YACHT
SCALE:	NO	DATE:	1/27/01	BILGE JUMPER HARNESS
DATE:	DISTRIBUTION	DATE:	REVISIONS	DWG NO.: E43W000600
1/01	REVISED			SHEET NO.: # OF #

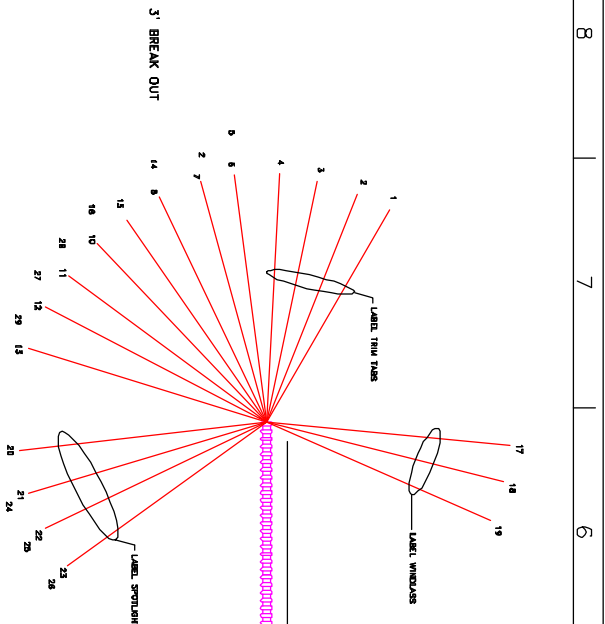


WIRE SCHEDULE				
1	RED	12	TRIM TAB	38'
2	GREEN	12	TRIM TAB	38'
3	BLUE	12	TRIM TAB	38'
4	YELLOW	12	TRIM TAB	38'
5	PINK/RED	14	PORT FUEL	38'
6	BLACK/WHIT	14	HALON	38'
7	BLUE	14	FWD IND.	38'
8	GRAY/YELL	12	TRANSOM LT	40'
9	VIOLET	14	GEN. IND.	38'
10	PINK/GRN	14	STBD. FUEL	38'
11	BLUE	14	MID IND.	38'
12	ORG/WHITE	4	HELM ACC.	40'
13	ORG/BLK	4	BRIDGE EL.	40'
14	YELL/ORG	8	BLOWER	40'
15	ORANGE	8	MEMORY	40'
16	ORANGE	12	WINDLASS	40'
17	ORANGE	12	WINDLASS	40'
18	ORG/GREEN	12	SPOTLIGHT	40'
19	BLACK	12	SPOTLIGHT	40'
20	YELLOW	12	SPOTLIGHT	40'
21	ORANGE	12	SPOTLIGHT	40'
22	GRAY	12	SPOTLIGHT	40'
23	TAN	12	SPOTLIGHT	40'
24	BLUE	12	SPOTLIGHT	40'
25	GREEN	12	SPOTLIGHT	40'
26	YELLOW	4	GROUND	40'
27	RED/WHITE	4	GROUND	40'
28	YELLOW	14	GROUND	40'
29	YELLOW	14	GROUND	40'
30	YELLOW	14	GROUND	40'
31	YELLOW	14	GROUND	40'

CAP B NO. 770028-1			
1	BLUE	16	FWD BLUE
2	VIOLET	16	AFT BLUE
3	YELLOW	14	GEN. IND
4	BLACK/WHIT	14	GROUND
5	YELLOW	14	HALON
6	—	—	—
7	—	—	—
8	RED/WHIT	14	MID IND.
9	20	14	PARALLEL

CAP TT NO. 770026-1			
1	RED	12	TRIM TAB
2	YELLOW	12	TRIM TAB
3	BLUE	12	TRIM TAB
4	GREEN	12	TRIM TAB

CAP F NO. 770024-1				
1	6	PINK/RED	14	PORT FUEL
2	11	PINK/GRN	14	STBD. FUEL

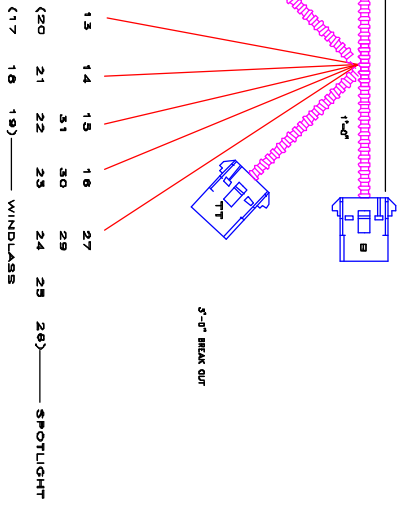

SILVERTON MARINE PART NO. 005 -

SILVERTON
DESIGN AND ENGINEERING

301 RIVERSIDE DRIVE, MILVILLE, NEW JERSEY 08332

TEL: 609.825.4117 FAX: 609.293.8025

DRAWN BY: JBP APPROVED BY: JBP


SCALE: NO DATE: 12/8/00


DATE: DISTRIBUTION DATE: REVISIONS



DWG NO.: BRIDGE JUMPER

SHEET NO: 1 OF 1

THIS DRAWING IS THE SOLE PROPERTY OF SILVERTON MARINE CORP. AND THE INFORMATION CONTAINED HEREIN IS NOT TO BE USED OR REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SILVERTON MARINE CORPORATION.

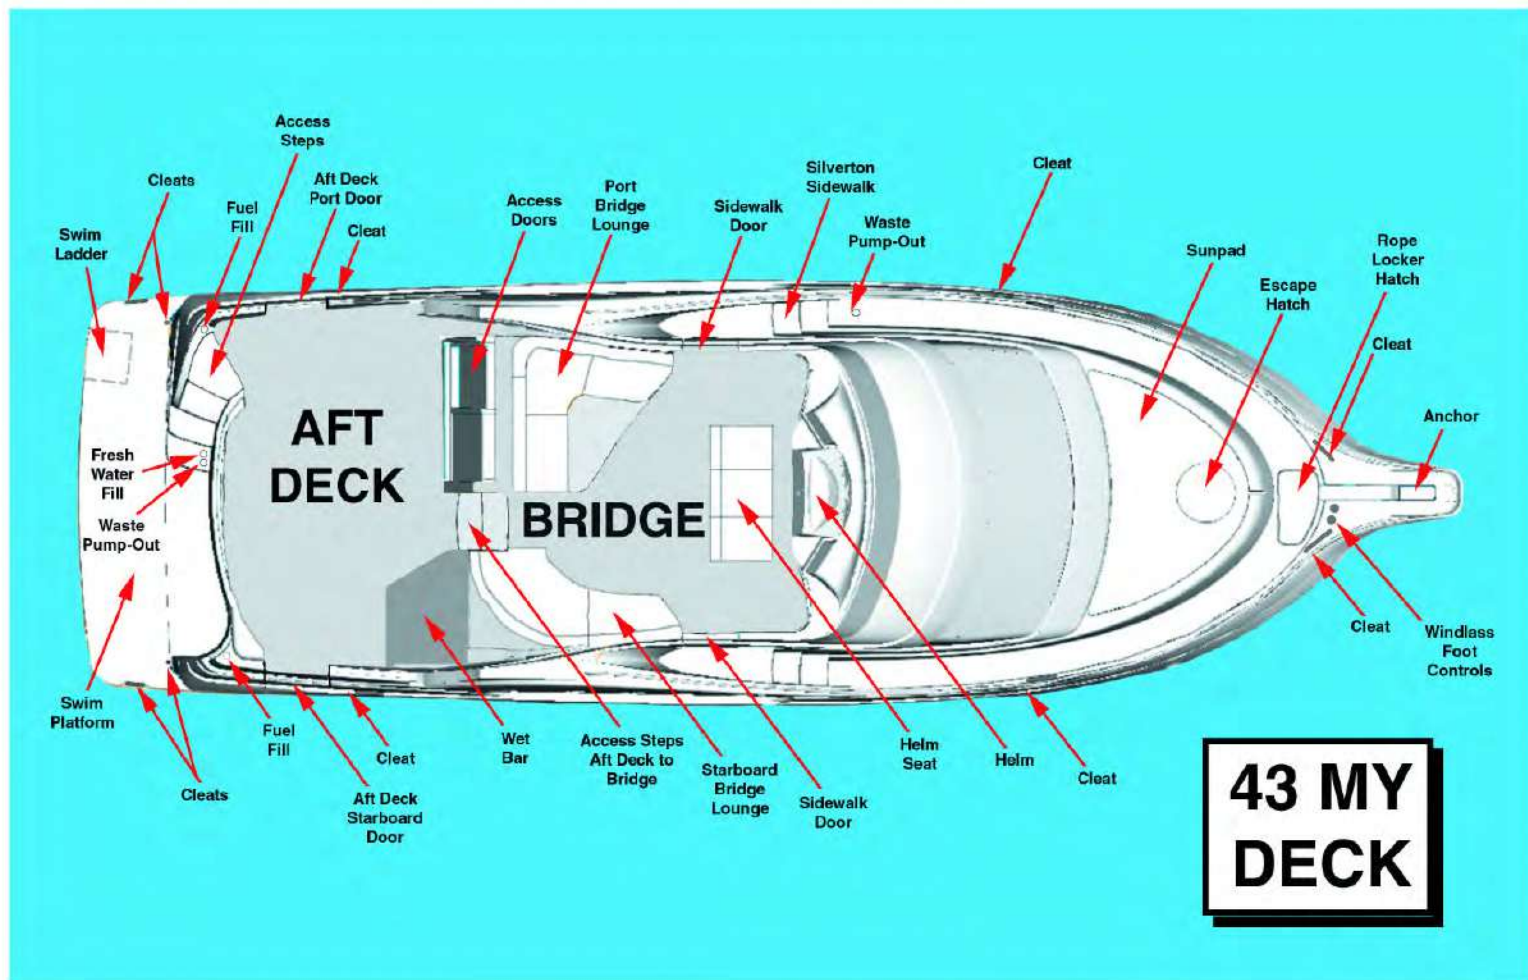

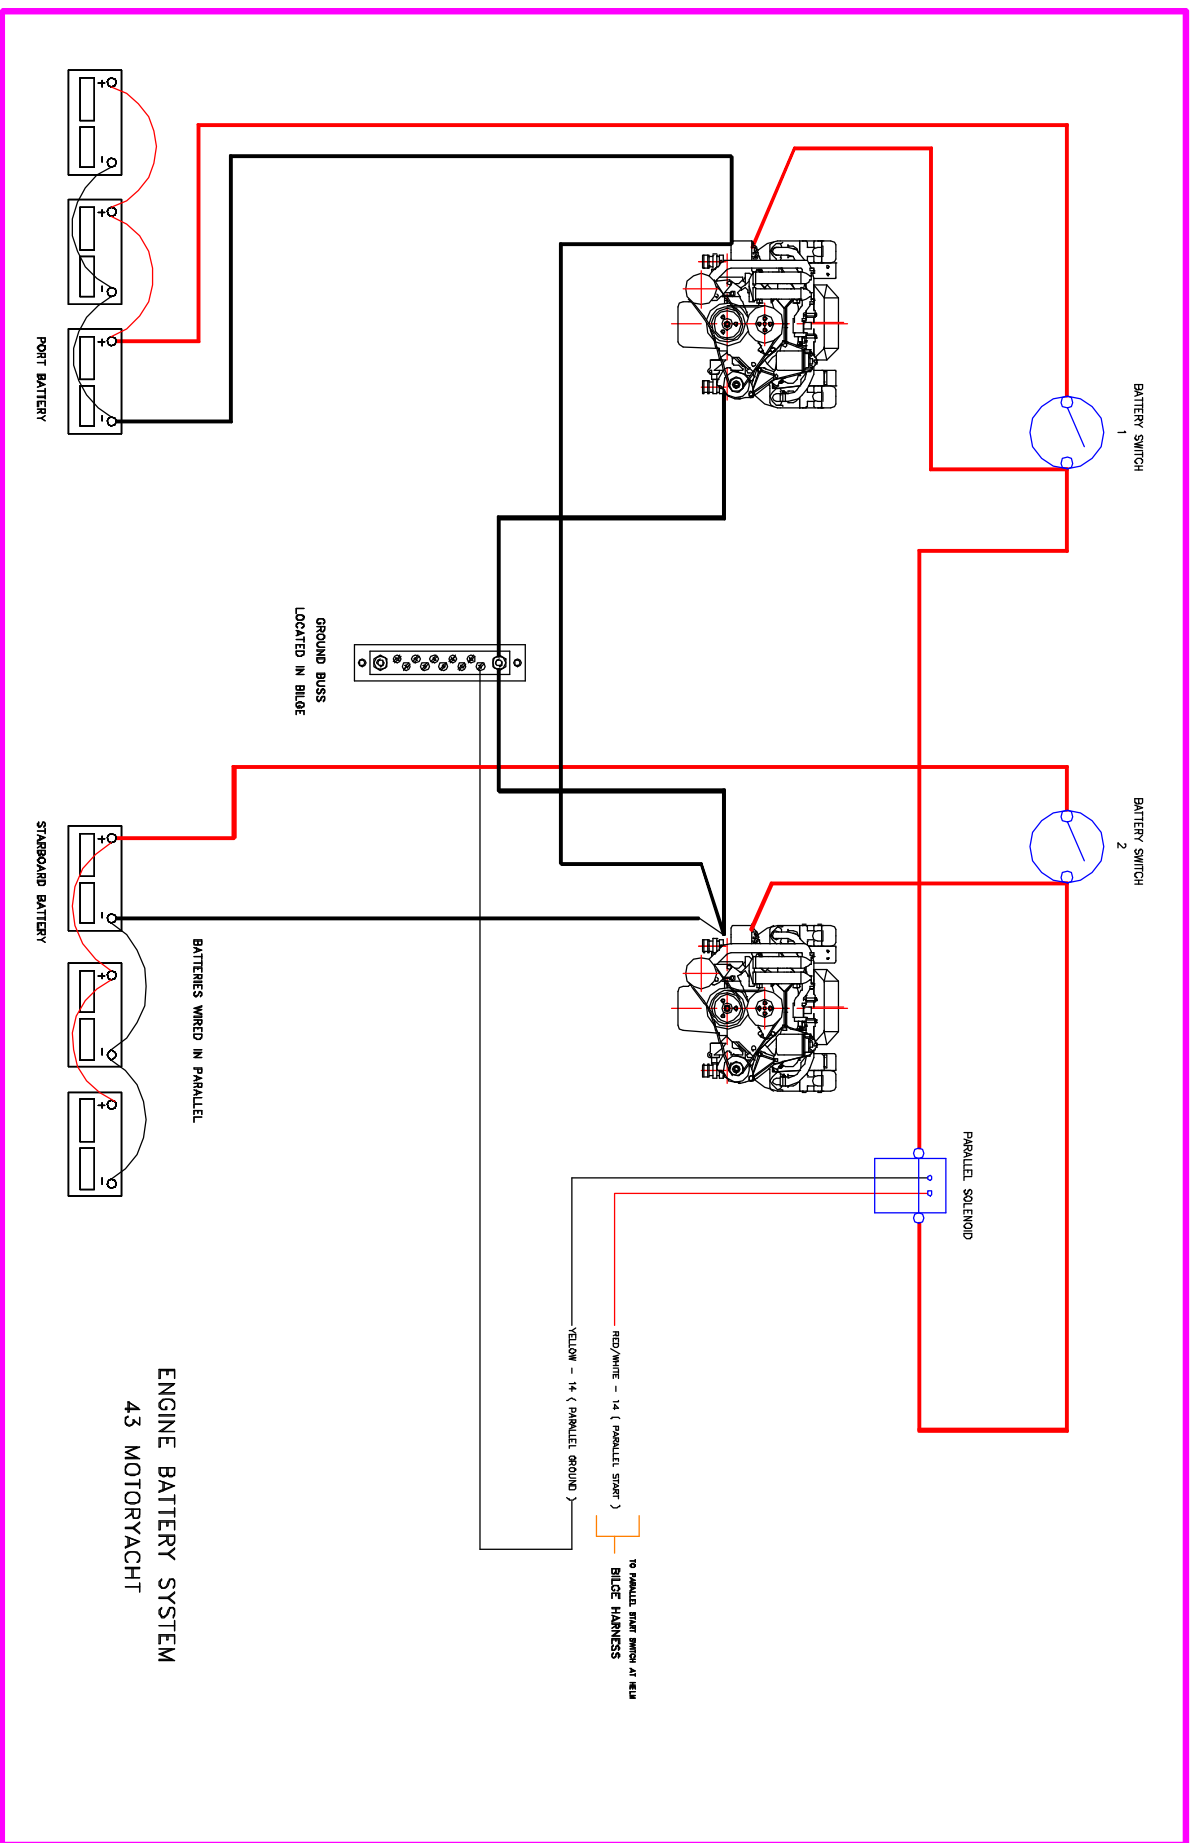

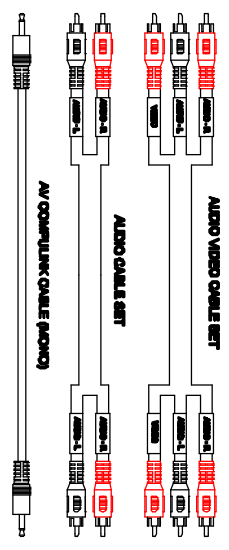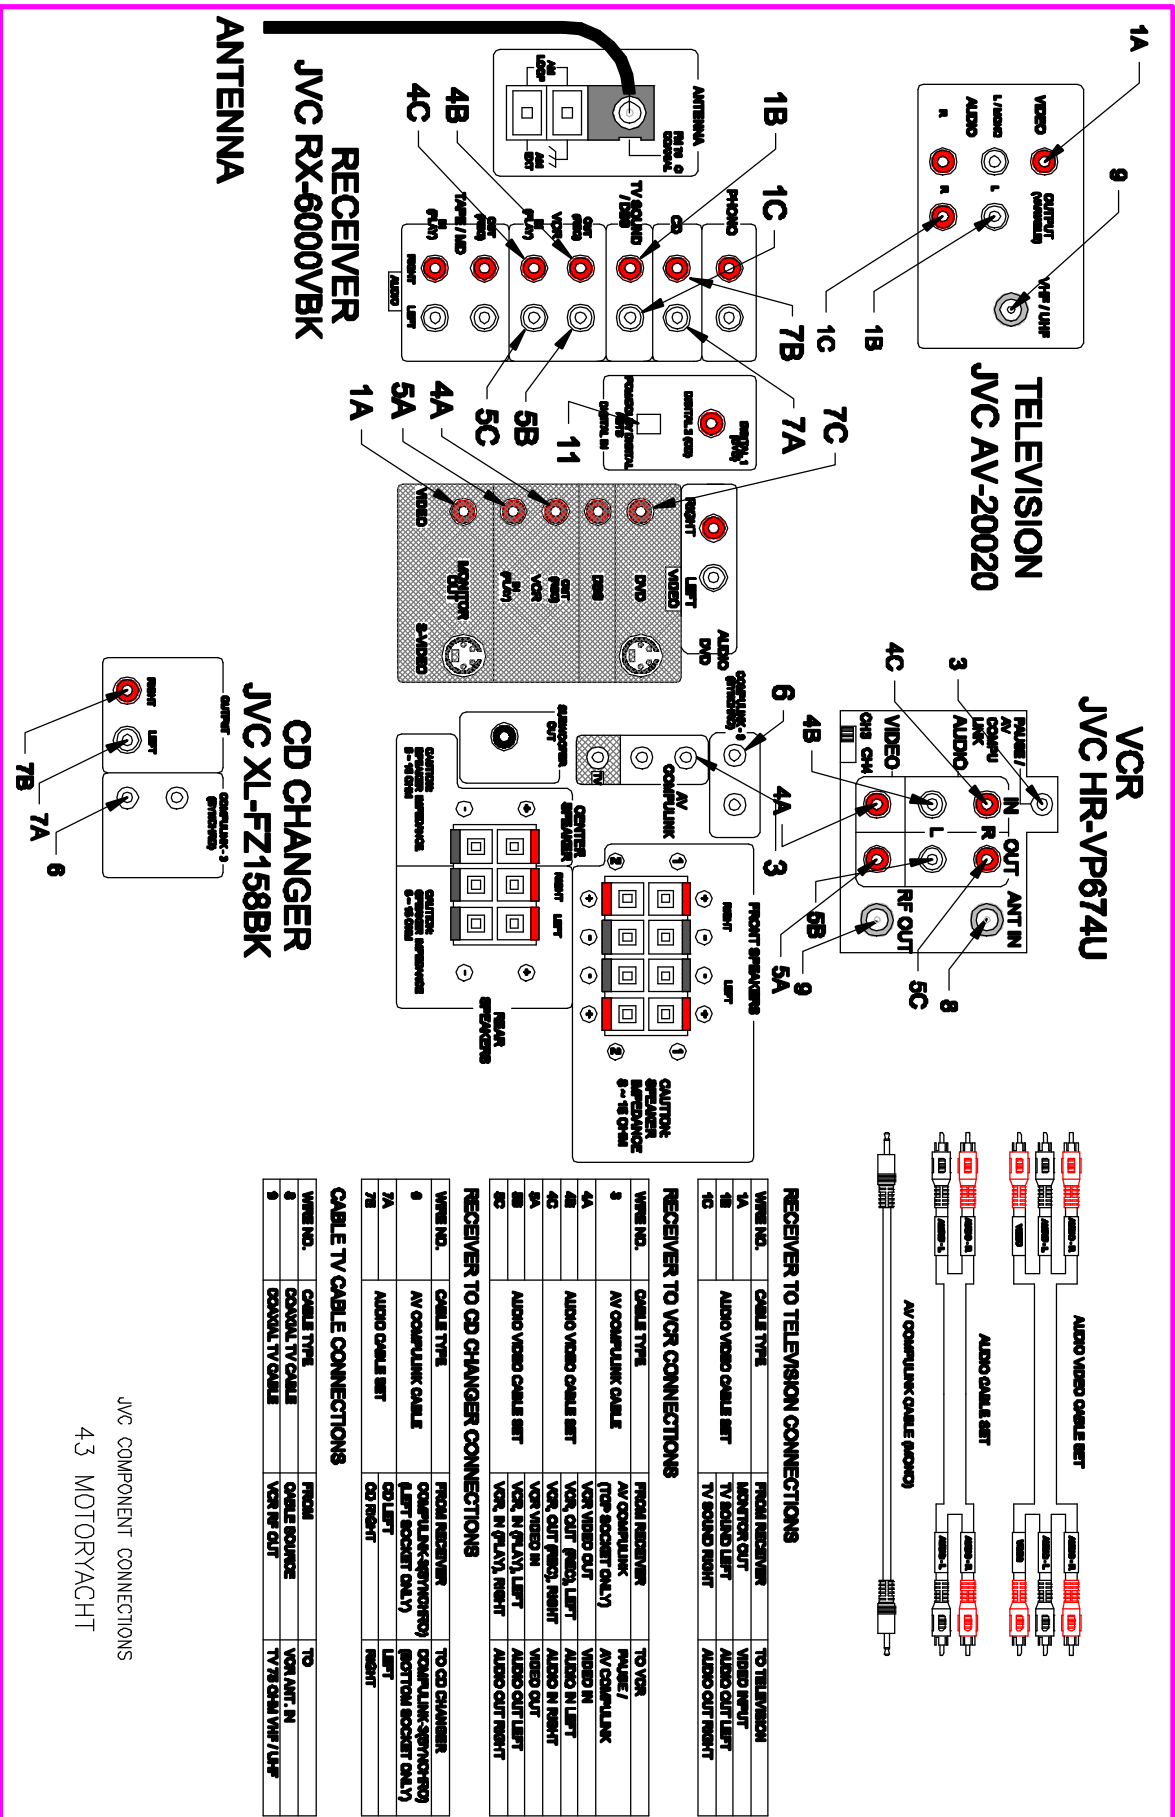

RECEIVER TO TELEVISION CONNECTIONS

WIRE NO.	CABLE TYPE	FROM RECEIVER	TO TELEVISION
1A	AUDIO VIDEO CABLE SET	VIDEO OUT	VIDEO INPUT
1B		TV SOUND LEFT	AUDIO OUT LEFT
1C		TV SOUND RIGHT	AUDIO OUT RIGHT

RECEIVER TO VCR CONNECTIONS

WIRE NO.	CABLE TYPE	FROM RECEIVER	TO VCR
3	AV CABLE LINK (TYPE SOCKET ONLY)	VIDEO OUT	VIDEO IN
4A		VCR OUT (VIDEO, LEFT)	AUDIO IN LEFT
4B		VCR OUT (VIDEO, RIGHT)	AUDIO IN RIGHT
4C		VCR OUT (VIDEO, LEFT)	VIDEO OUT
4D		VCR IN (PLAY), LEFT	AUDIO OUT LEFT
4E		VCR IN (PLAY), RIGHT	AUDIO OUT RIGHT

RECEIVER TO CD CHANGER CONNECTIONS


WIRE NO.	CABLE TYPE	FROM RECEIVER	TO CD CHANGER
9	AV CABLE LINK (TYPE SOCKET ONLY)	VIDEO OUT	VIDEO IN
7A		CD LEFT	LEFT SOCKET ONLY
7B		CD RIGHT	RIGHT


CABLE TV CABLE CONNECTIONS

WIRE NO.	CABLE TYPE	FROM	TO
9	COAXIAL TV CABLE	COAXIAL SOURCE	TV ANT. IN
9	COAXIAL TV CABLE	VCR IN GOLF	TV 75 OHM VHF/UHF

JVC COMPONENT CONNECTIONS
4.3 MOTOR YACHT

FLYBRIDGE SUPREME SOUND PACKAGE SONY 4.3 MOTOR YACHT ELECTRICAL SCHEMATIC

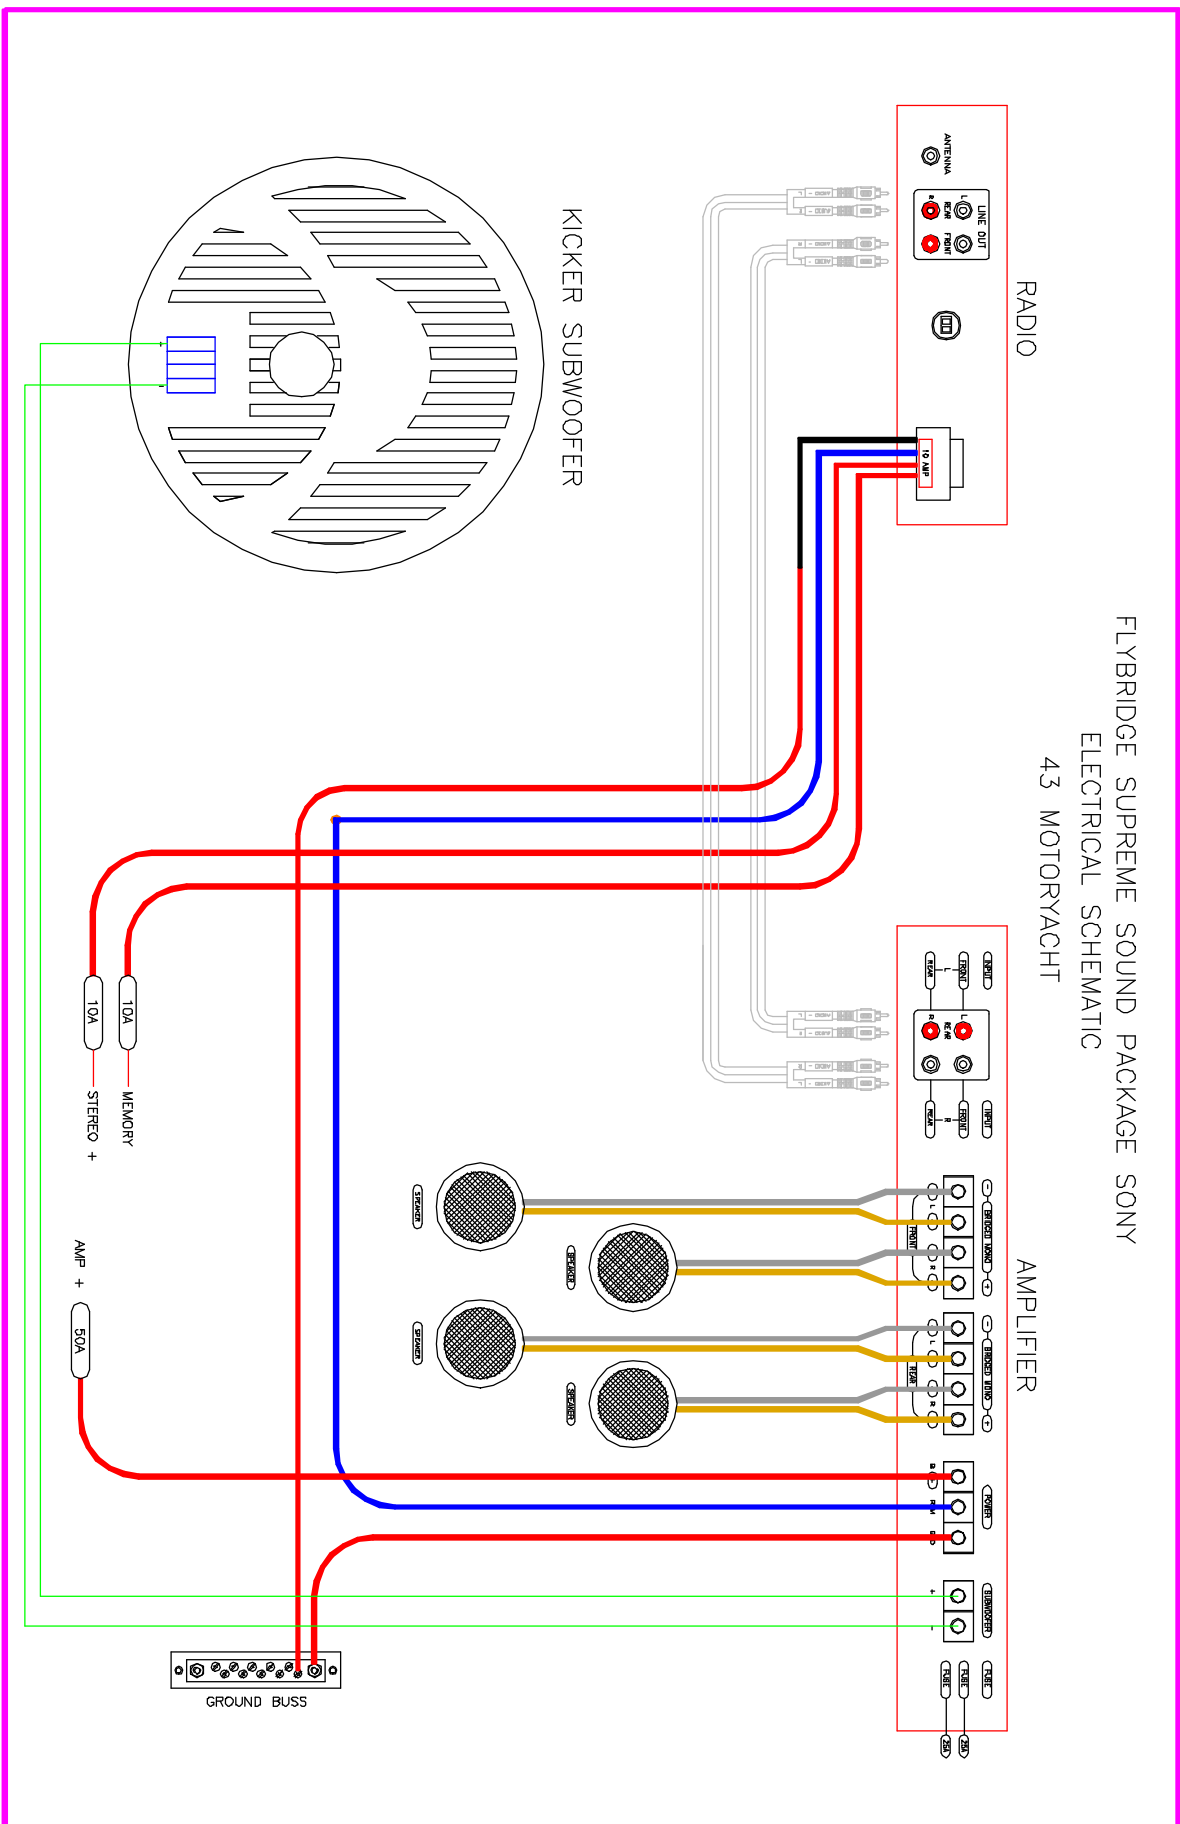

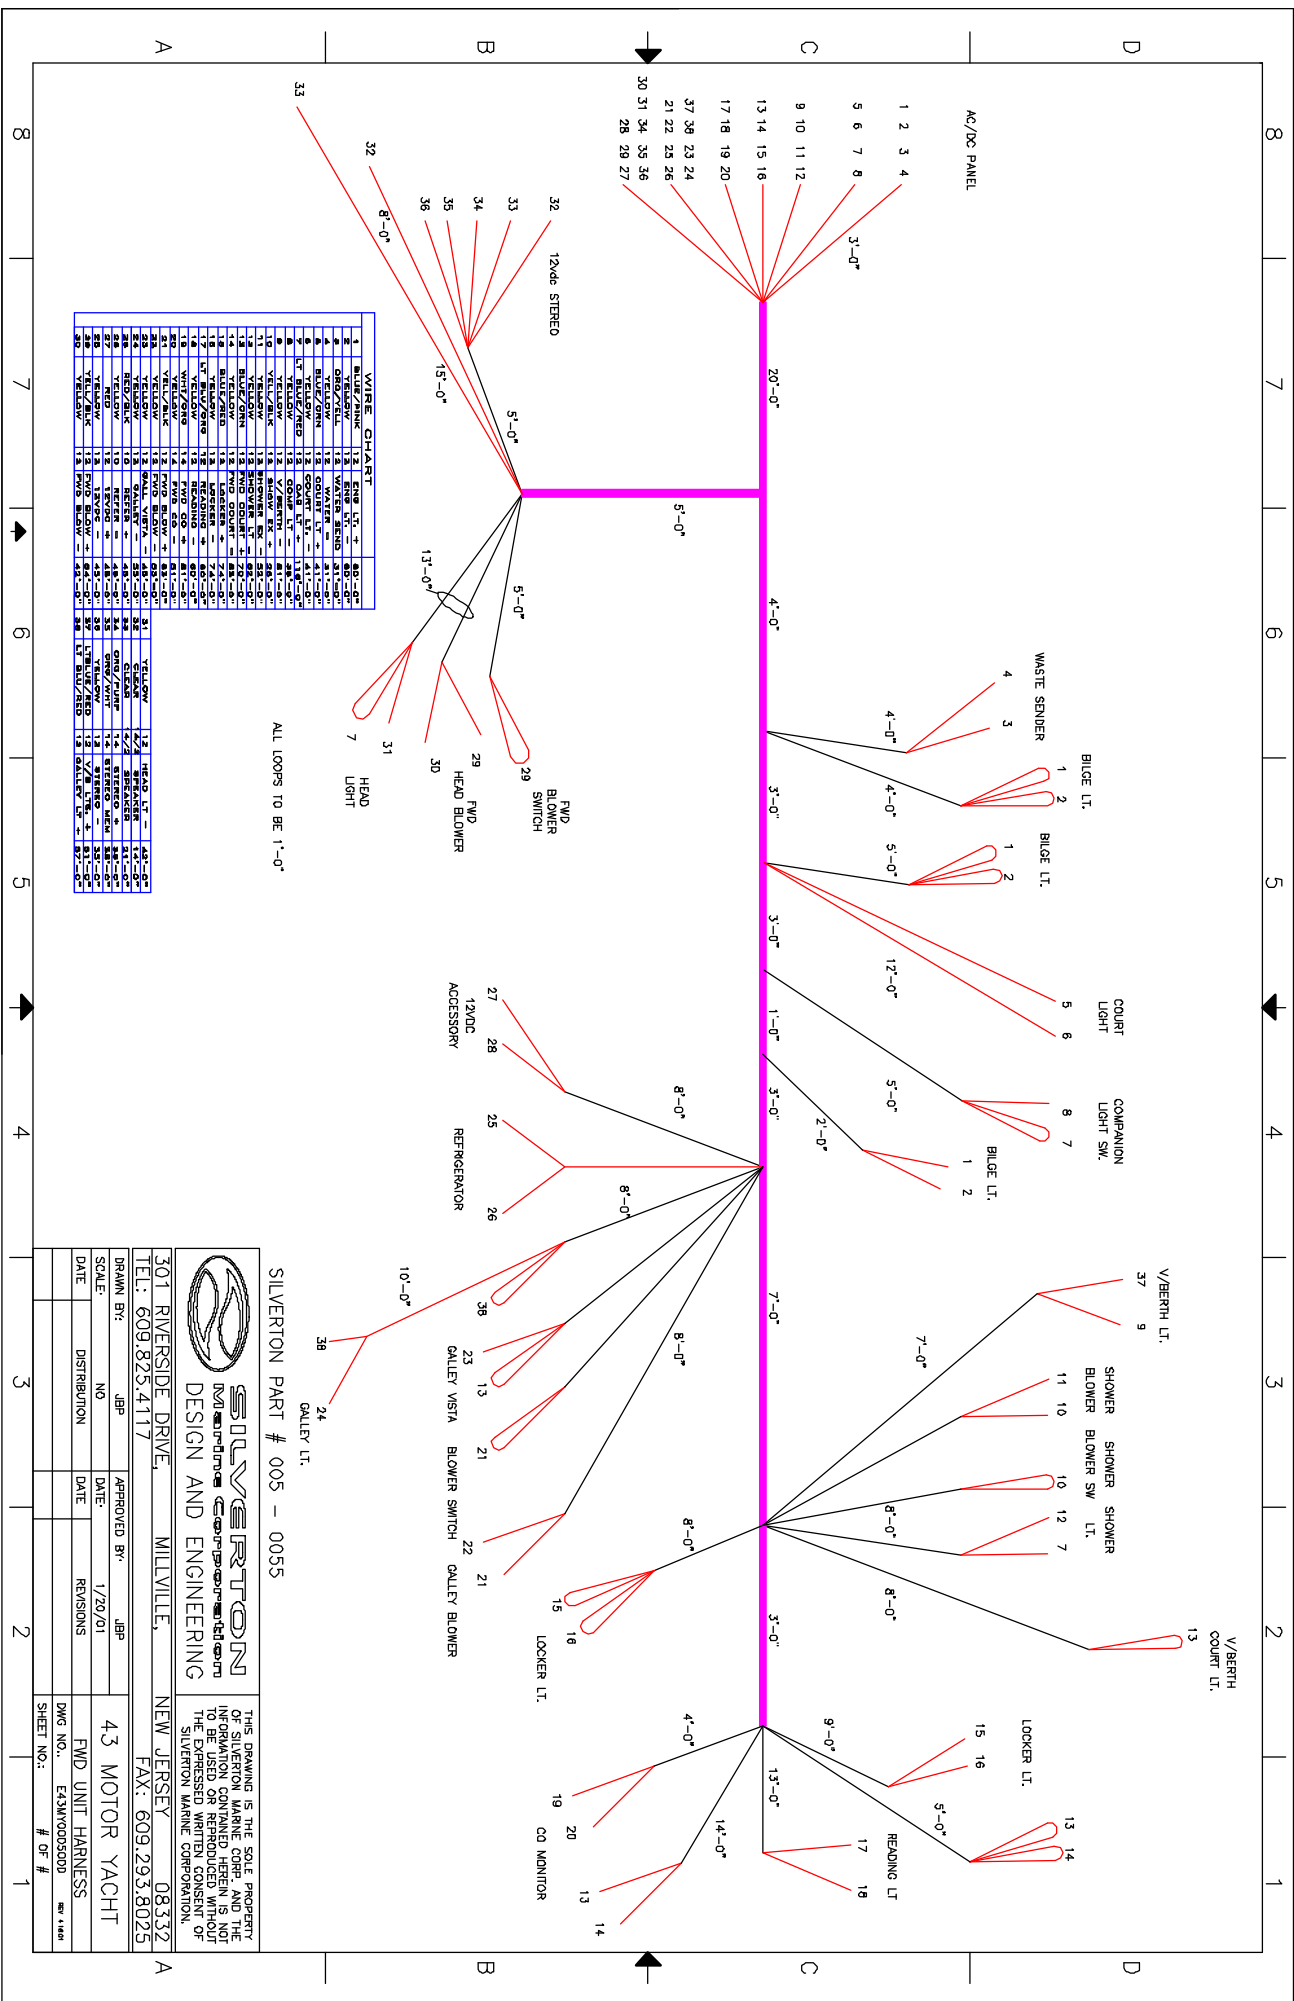

SILVERTON PART # 005 - 0055


301 RIVERSIDE DRIVE, MILVILLE, NEW JERSEY 08332


TEL: 609.825.4117 FAX: 609.293.8025


DRAWN BY:	JBP	APPROVED BY:	JBP	43 MOTOR YACHT
SCALE:	NO	DATE:	1/20/01	FWD UNIT HARNESS
DATE:		REVISIONS:		
		DWG NO.:	E43M000500D	SHEET NO.:
				# OF #

THE DRAWING IS THE SOLE PROPERTY OF SILVERTON MARINE CORP. AND THE INFORMATION CONTAINED HEREIN IS NOT TO BE USED OR REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SILVERTON MARINE CORPORATION.


43 MOTOR YACHT

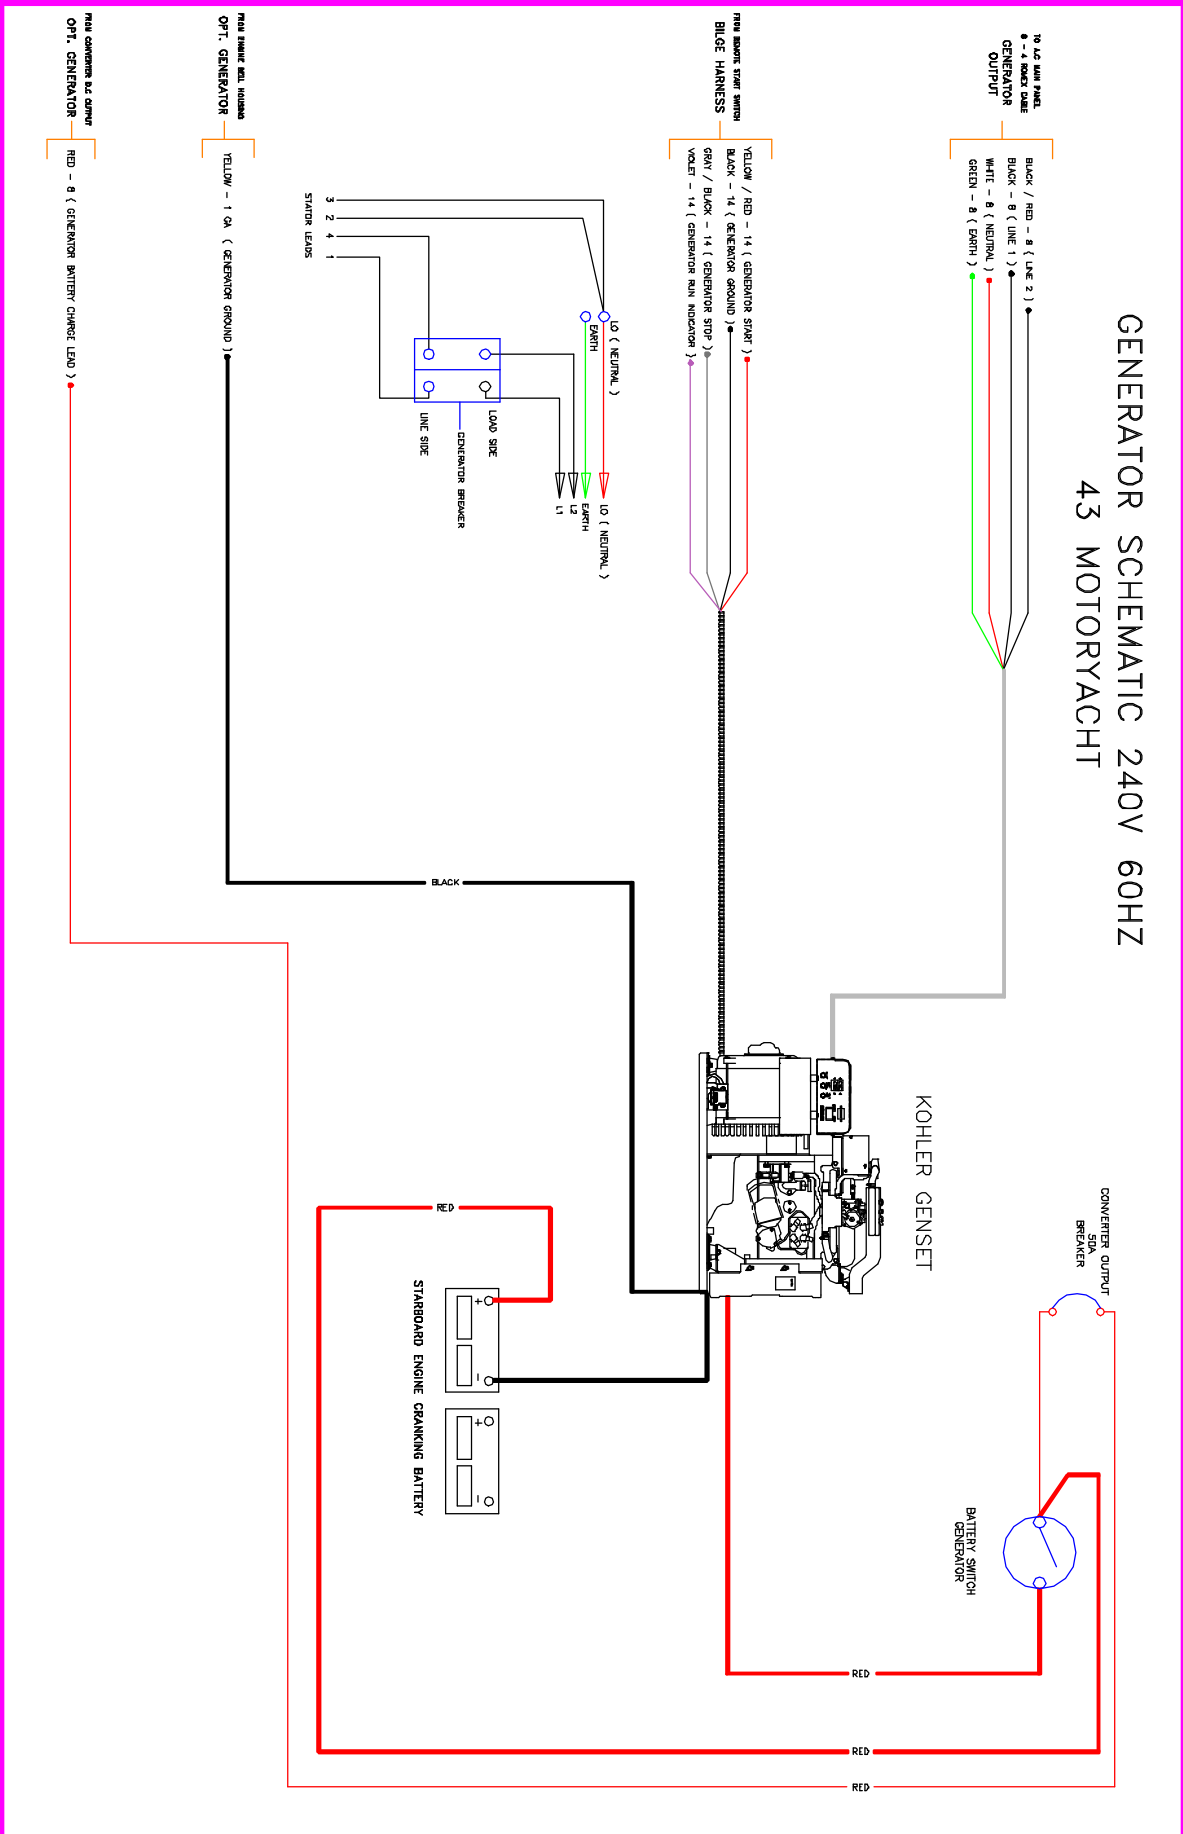

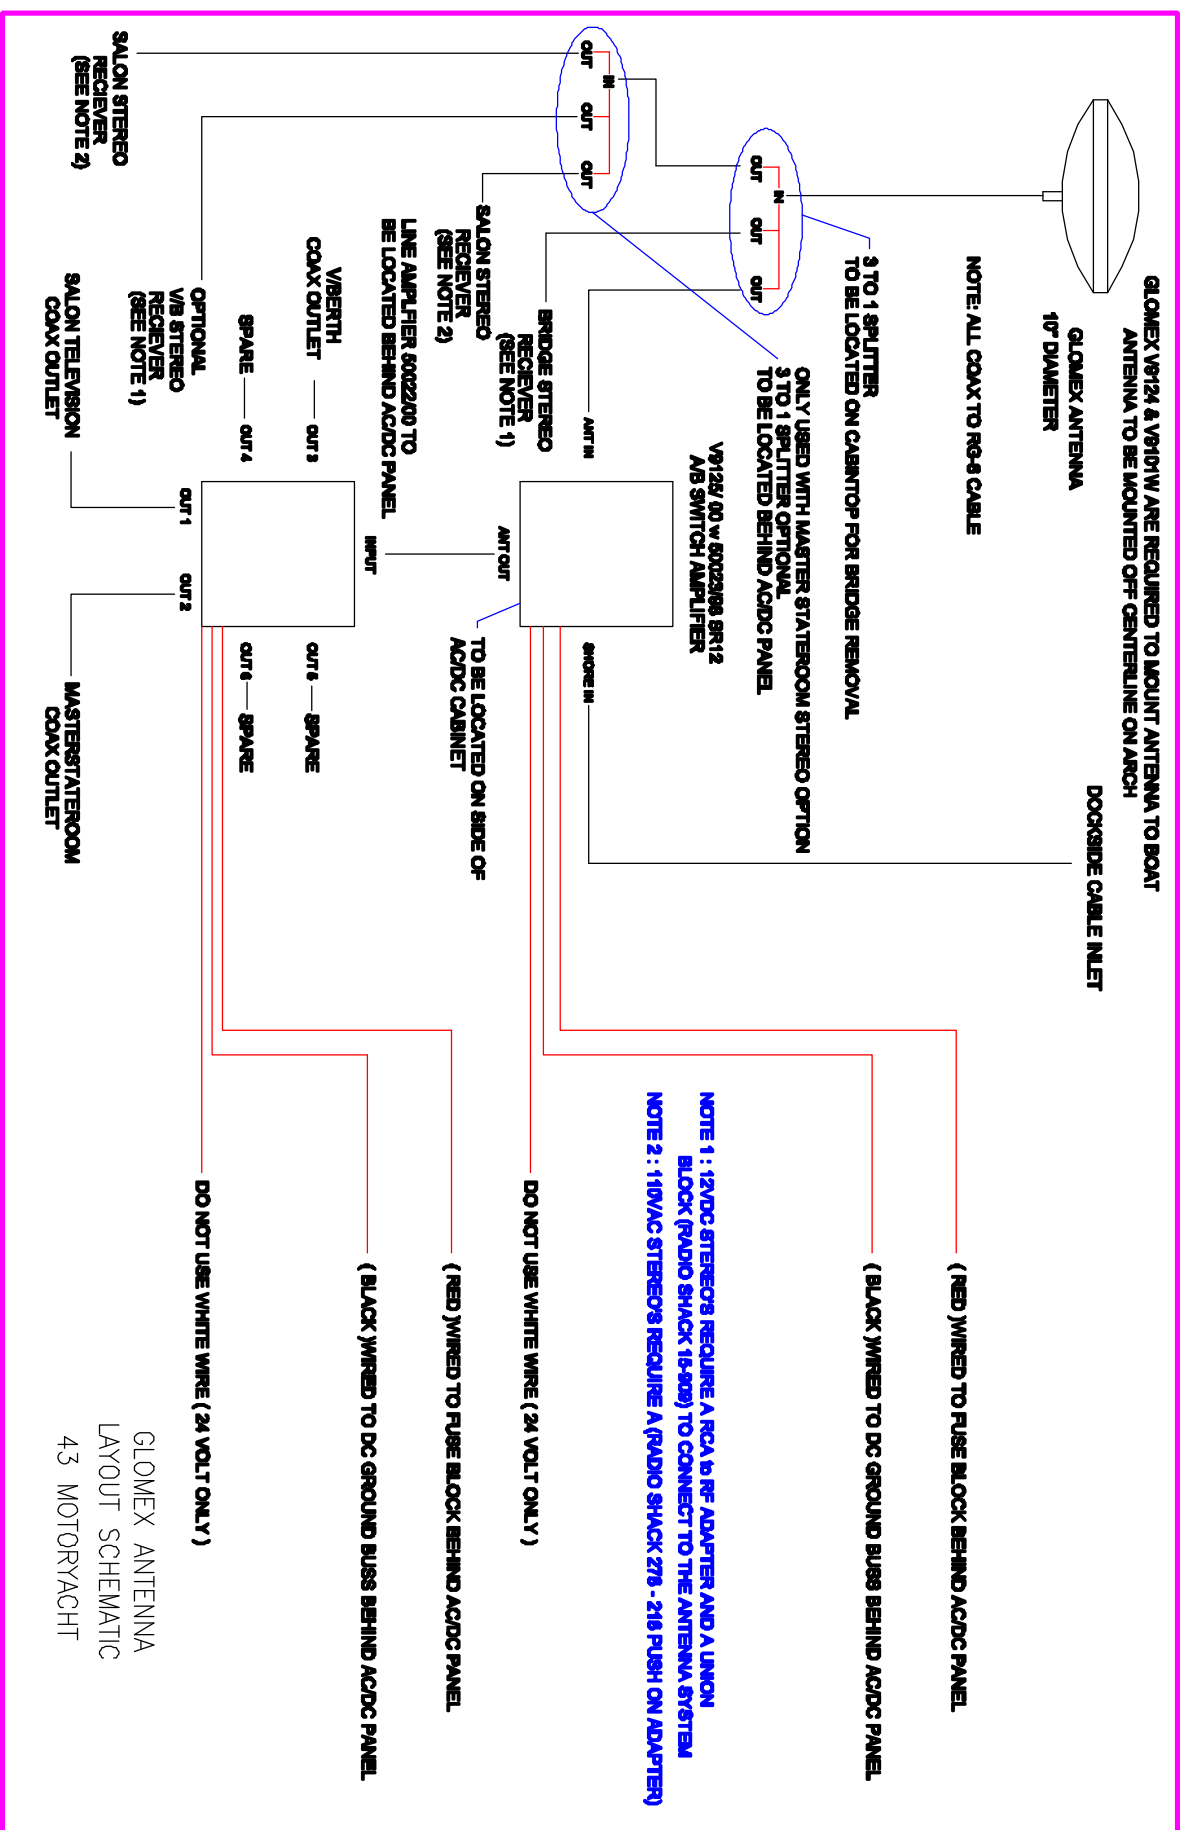

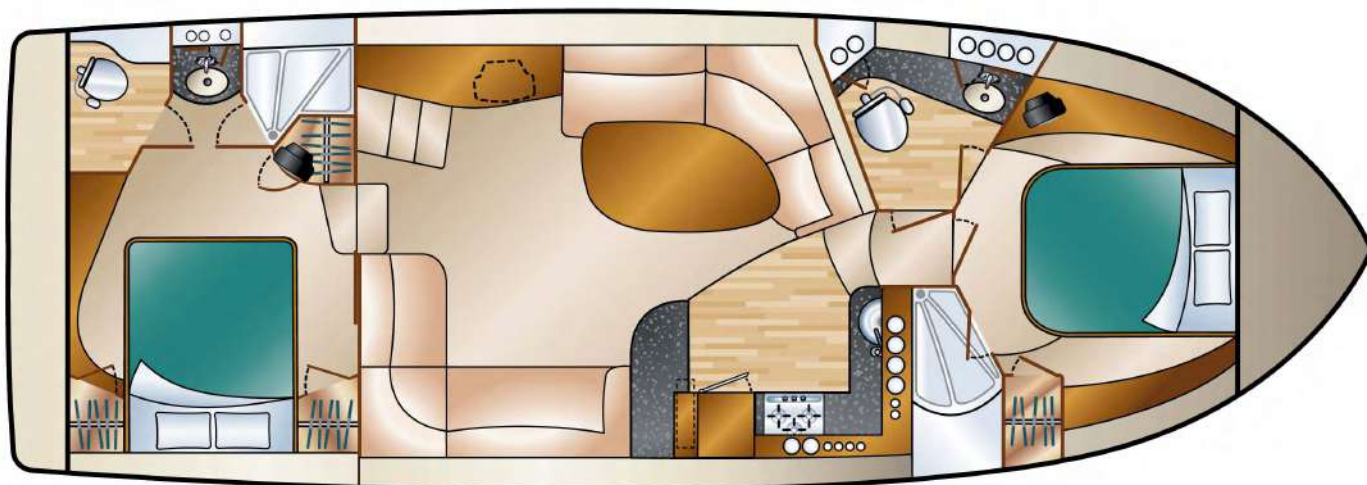

43 MOTOR YACHT
INTERIOR

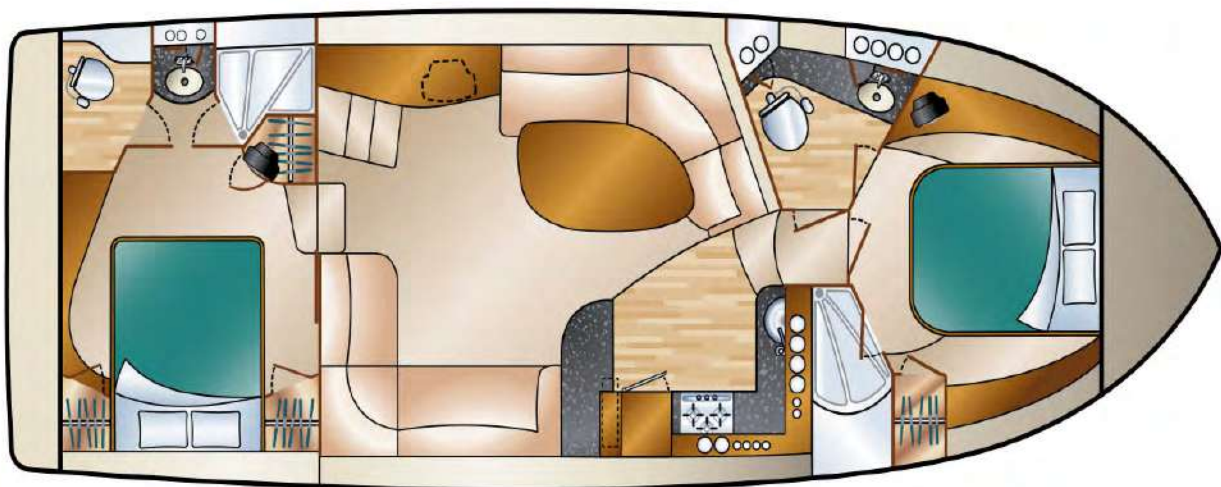

43 MOTOR YACHT
INTERIOR





WASTE / WATER MONITOR ELECTRICAL SCHEMATIC 43 MOTORYACHT

